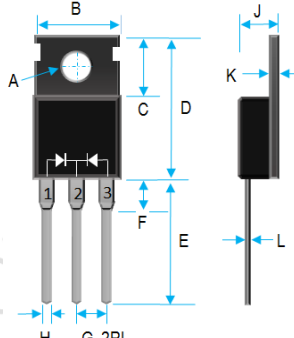


60A SCHOTTKY BARRIER RECTIFIERS

	Value Inch[mm]		
	Dim.	Min.	Max.
A	0.139 [3.55]	---	
B	0.387 [9.85]	0.419 [10.66]	
C	0.226 [5.75]	0.269 [6.85]	
D	0.548 [13.93]	0.624 [15.87]	
E	0.50 [12.70]	---	
F	---	0.177 [4.50]	
G	0.095[2.41]	0.105[2.67]	
H	0.019 [0.50]	0.038 [0.96]	
J	0.163 [4.16]	0.196 [5.00]	
K	0.045 [1.15]	0.054 [1.39]	
L	---	0.025 [0.65]	

PRODUCT FEATURES

1. FLAMMABILITY CLASSIFICATION 94V-0
2. EXTREMELY LOW V_f
3. LOW STORED CHARGE
4. MAJORITY CARRIER CONDUCTION
5. LOW POWER LOSS/HIGH EFFICIENCY
6. CASE: TRANSFER MOLDED, TO-220AB
7. DIMENSIONS IN INCHES AND (MILLIMETERS)
8. LEADS: SOLDERABILITY PER MIL-STD-202 METHOD 208
9. WEIGHT: 2.15 GRAMS
10. RoHS COMPLIANT AND HALOGEN FREE

ELECTRICAL CHARACTERISTICS

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED) AND ELECTRICAL CHARACTERISTICS

RATING	SYMBOL	UNITS
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT, SEE FIG.1	I_o	60 PER DEVICE (30 PER LEG) A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	300 A
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta JC}$	2.2 $^\circ\text{C/W}$
STORAGE TEMPERATURE RANGE	T_{STG}	- 65 TO +175 $^\circ\text{C}$
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO +125 $^\circ\text{C}$
MAXIMUM REVERSE CURRENT AT 25 $^\circ\text{C}$ PER LEG (NOTE 1)	I_R	0.5 mA
MAXIMUM REVERSE CURRENT AT 125 $^\circ\text{C}$ PER LEG (NOTE 1)	I_R	20 mA

PART NUMBER	MAX RECURRENT PK REVERSE VOLTAGE/DC BLOCKING V_{RRM}/V_R (V)	MAX V_{RMS} (V)	MAXIMUM FORWARD VOLTAGE @ I_o DC, V_f (V)
SB6040CT	40	28	0.55
SB6045CT	45	31.5	0.55
SB6060CT	60	42	0.65
SB6065CT	65	45.5	0.65

NOTE : 1. PULSE TEST: 300 μs PULSE WIDTH, 1% DUTY CYCLE.

2. CURRENT RATING IS BASED ON SINGLE PHASE, 1/2 WAVE, 60HZ, RESISTIVE, OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%.

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - FORWARD DERATING CURVE

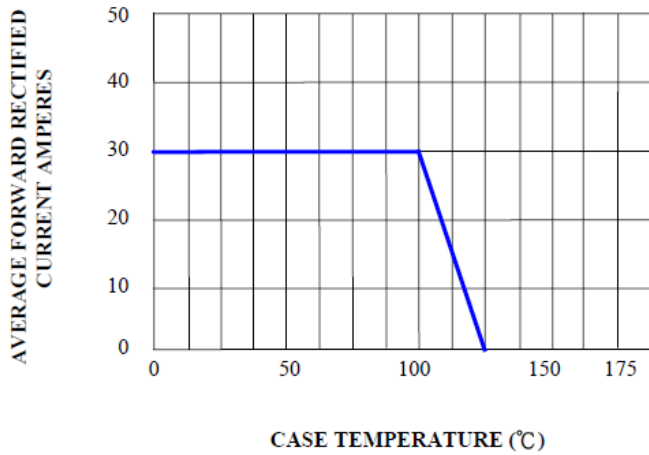


FIG. 2 - PEAK FORWARD SURGE CURRENT

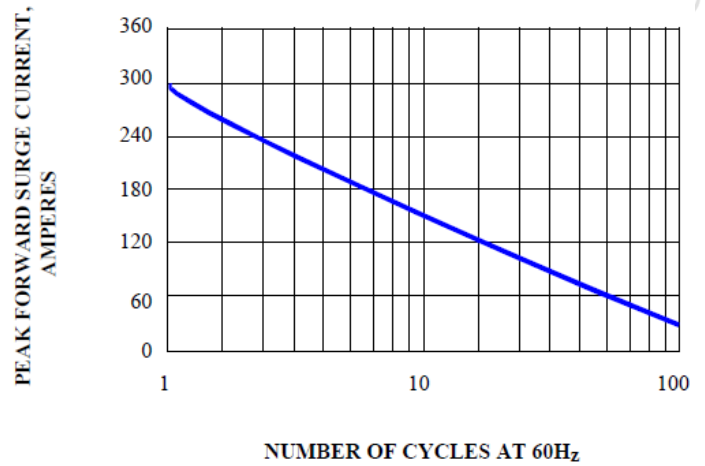


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

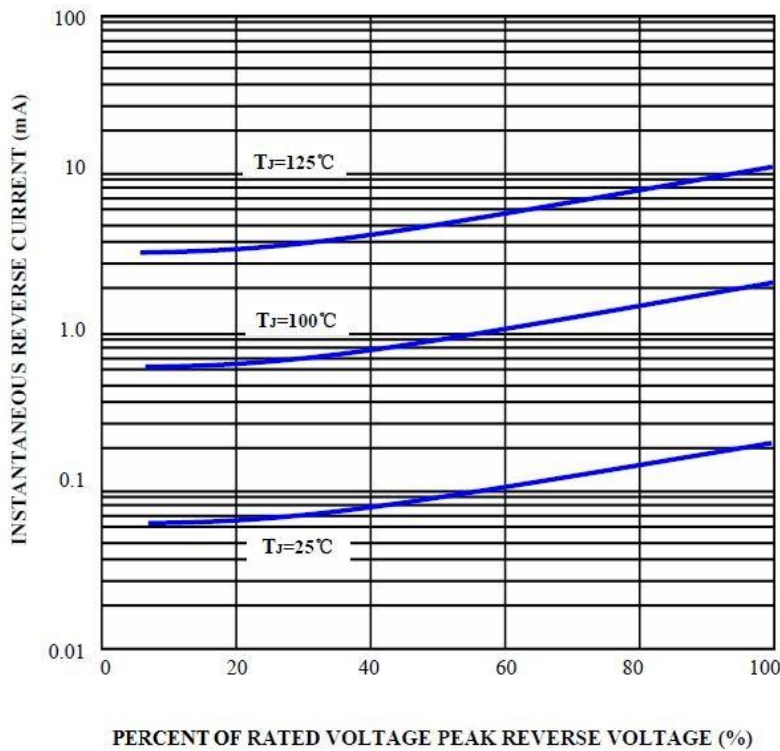


FIG. 4 - TYPICAL FORWARD CHARACTERISTIC PER LEG

