

• 1N3821A-1 THRU 1N3828A-1 AVAILABLE IN JAN, JANTX AND JANTXV
PER MIL-PRF-19500/115

- 1 WATT ZENER DIODE
- DOUBLE PLUG CONSTRUCTION
- METALLURGICALLY BONDED



1N3821A thru 1N3828A
and
1N3821A-1 thru 1N3828A-1


MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C
Storage Temperature: -65°C to +175°C
DC Power Dissipation: 1 watt @ $T_L = 95^\circ\text{C}$
Power Derating: 12.5 mW / °C above $T_L = 95^\circ\text{C}$
Forward Voltage @ 200mA = 1.2 volts maximum

ELECTRICAL CHARACTERISTICS @ 25°C

| CDI TYPE NUMBER (NOTE 1) | NOMINAL ZENER VOLTAGE $V_Z @ I_{ZT}$ (NOTE 3) | ZENER TEST CURRENT I_{ZT} | MAXIMUM ZENER IMPEDANCE $Z_{ZT} @ I_{ZT}$ $Z_{ZK} @ I_{ZK}=1\text{mA}$ (NOTE 2) | | MAX. DC ZENER CURRENT I_{ZM} | MAX. REVERSE LEAKAGE CURRENT $I_R @ V_R$ | |
|---------------------------------------|---|--------------------------------------|---|------|---|--|-------|
| | VOLTS | mA | OHMS | OHMS | mA | μA | VOLTS |
| 1N3821 | 3.3 | 76 | 10 | 400 | 276 | 100 | 1 |
| 1N3821A | 3.3 | 76 | 10 | 400 | 276 | 100 | 1 |
| 1N3822 | 3.6 | 69 | 10 | 400 | 252 | 75 | 1 |
| 1N3822A | 3.6 | 69 | 10 | 400 | 252 | 75 | 1 |
| 1N3823 | 3.9 | 64 | 9 | 400 | 238 | 25 | 1 |
| 1N3823A | 3.9 | 64 | 9 | 400 | 238 | 25 | 1 |
| 1N3824 | 4.3 | 58 | 9 | 400 | 213 | 5 | 1 |
| 1N3824A | 4.3 | 58 | 9 | 400 | 213 | 5 | 1 |
| 1N3825 | 4.7 | 53 | 8 | 500 | 194 | 5 | 1 |
| 1N3825A | 4.7 | 53 | 8 | 500 | 194 | 5 | 1 |
| 1N3826 | 5.1 | 49 | 7 | 550 | 178 | 3 | 1 |
| 1N3826A | 5.1 | 49 | 7 | 550 | 178 | 3 | 1 |
| 1N3827 | 5.6 | 45 | 5 | 600 | 162 | 3 | 2 |
| 1N3827A | 5.6 | 45 | 5 | 600 | 162 | 3 | 2 |
| 1N3828 | 6.2 | 41 | 2 | 700 | 146 | 3 | 3 |
| 1N3828A | 6.2 | 41 | 2 | 700 | 146 | 3 | 3 |

- NOTE 1** No suffix = $\pm 10\%$ tolerance on nominal Zener voltage, suffix "A" signifies $\pm 5\%$, suffix "C" signifies $\pm 2\%$, suffix "D" signifies $\pm 1\%$.
- NOTE 2** Zener impedance is derived by superimposing on I_{ZT} A 60Hz rms a.c. current equal to 10% of I_{ZT} .
- NOTE 3** Zener voltage is measured with the device junction in thermal equilibrium at an ambient temperature of $25^\circ\text{C} \pm 3^\circ\text{C}$.

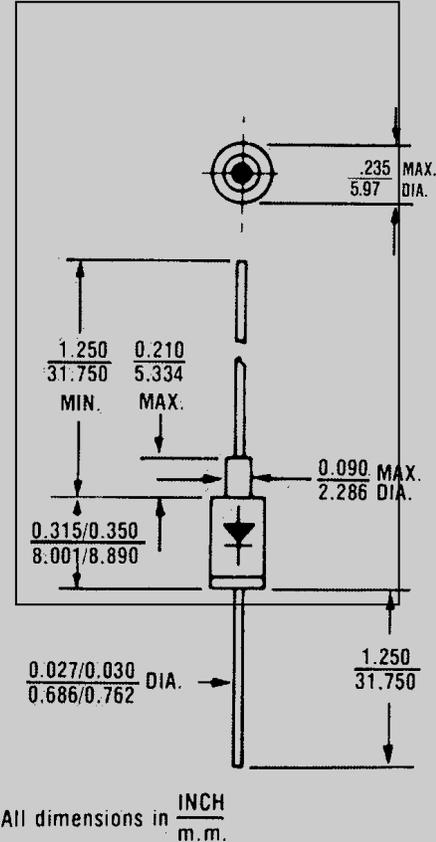

All dimensions in INCH
m.m.

FIGURE 1

- LEAD MATERIAL:** Copper clad steel
- LEAD FINISH:** Tin / Lead
- THERMAL RESISTANCE:** ($R_{\theta JEC}$):
80 °C/W maximum at L = .375 inch
- THERMAL IMPEDANCE:** ($Z_{\theta JX}$): 15
°C/W maximum
- POLARITY:** Diode to be operated with
the banded (cathode) end positive.

