


SD

2065-32-7

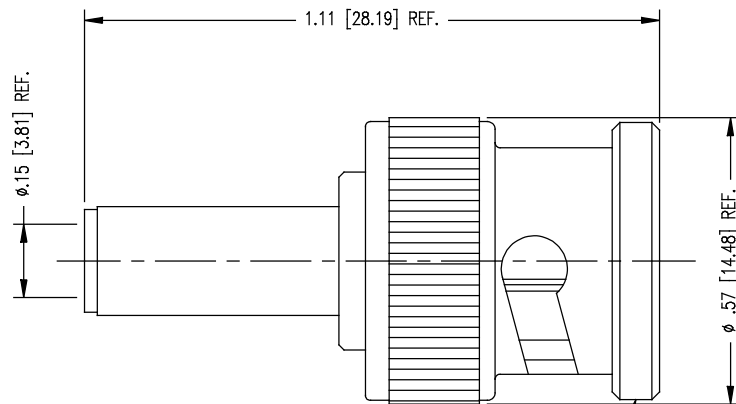

STAMP: KINGS 2065-32-7
YRWK (DATE CODE)

UNRELEASESED!

NOTES:

1. FOR USE WITH TYPE 735 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-798.
3. FOR CRIMPING USE DIE SIZE KTH-2185.
4. CENTER CONTACT AND SLEEVE TO BE SUPPLIED UNASSEMBLED.
5. INTERFACE PER MIL-STD-348, FIG. 301-1 (AS APPLICABLE).
6. MARK PACKAGE: KINGS 2065-32-7
YRWK (DATE CODE)
7. MATERIAL:
 - INSULATOR- TEFLON
 - GASKET- SILICONE RUBBER
 - K-GRIP SLEEVE: COM'L BRONZE
 - OUTER CONTACT } BERYLLIUM COPPER
 - SPRING WASHER }
8. ALL OTHER METAL PARTS- BRASS
8. FINISHES:
 - CENTER CONTACT- GOLD PLATED
 - SPRING WASHER- SILVER PLATED
9. ALL OTHER METAL PARTS- NICKEL PLATE
9. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE- 75 OHMS
 - FREQUENCY RANGE- DC TO 2 GHz
 - WORKING VOLTAGE- 500 VRMS
10. DIMENSIONS ARE IN INCHES [MM].

REVISIONS

ISSUE	CHANGES
0	ER 40039 DRK 08/20/07
B	ECR-ER ATT QUOTE DCT 1/25/8
C	ECR-ER NO TABS DCT 2/12/8

SCALE 4:1

APPROX SURFACE AREA

-

USED ON

REF: EQR1135

75 OHM BNC PLUG

DRAWN DRK DATE 08/20/07

DESIGN DCT DATE 02/9/07

APPR. DATE

KINGS
A Winchester Electronics Company

SD

2065-32-7