

isc N-Channel MOSFET Transistor


2SK622

DESCRIPTION

- Drain Current $-I_D=20A @ T_C=25^\circ C$
- Drain Source Voltage-
: $V_{DSS}=150V(\text{Min})$
- Fast Switching Speed


APPLICATIONS

- Designed especially for low voltage,high speed applications, such as off-line switching power supplies , UPS,AC and DC motor controls,relay and solenoid drivers.

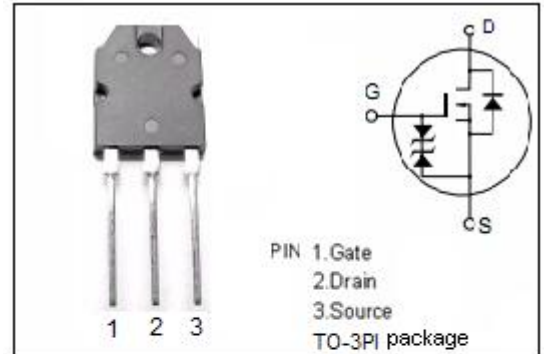

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	ARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage ($V_{GS}=0$)	150	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current-continuous@ $TC=25^\circ C$	20	A
P_{tot}	Total Dissipation@ $TC=25^\circ C$	120	W
T_j	Max. Operating Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-55~150	$^\circ C$

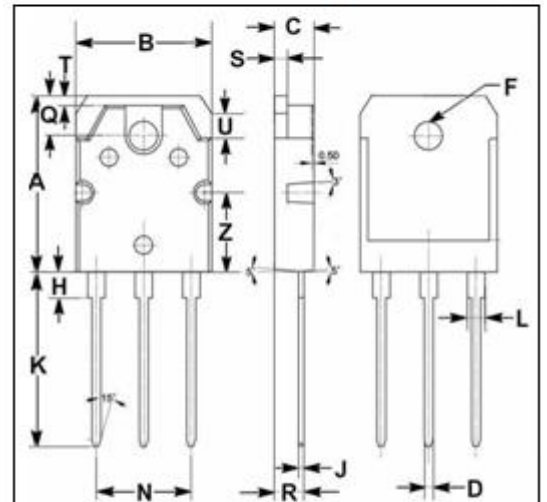

DIM	mm	
	MIN	MAX
A	19.90	20.10
B	15.50	15.70
C	4.40	4.60
D	0.90	1.10
F	3.20	3.40
H	2.90	3.10
J	0.50	0.70
K	19.90	20.10
L	1.90	2.10
N	10.80	11.00
Q	4.40	4.60
R	3.30	3.35
S	1.40	1.60
T	1.00	1.20
U	2.10	2.30
Z	8.90	9.10

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance,Junction to Case	1.67	$^\circ C/W$
$R_{th j-a}$	Thermal Resistance,Junction to Ambient	62.5	$^\circ C/W$

isc N-Channel Mosfet Transistor

2SK622

• ELECTRICAL CHARACTERISTICS (T_C=25°C)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0; I _D = 10mA	150			V
V _{GS(TH)}	Gate Threshold Voltage	V _{DS} = 10V; I _D = 1mA	2.0		4.0	V
R _{DS(ON)}	Drain-Source On-stage Resistance	V _{GS} = 10V; I _D =10A		0.06	0.075	Ω
V _{SD}	Diode Forward Voltage	I _F = 20A; V _{GS} =0		1.2		V
I _{GSS}	Gate Source Leakage Current	V _{GS} = ±16V; V _{DS} = 0			±10	uA
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =120V; V _{GS} = 0			250	uA
t _r	Rise time	V _{GS} =10V; I _D =10A; R _L =3 Ω		190		ns
t _{on}	Turn-on time			225		ns
t _f	Fall time			190		ns
t _{off}	Turn-off time			390		ns