

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

**Part Number:** [98273-1004](#)  
**Status:** **Active**  
**Overview:** NSCC - New Standard Casing Contact  
**Description:** 3.33mm / 6.00mm Pitch Hybrid Inline Female Housing, Right Slide Orientation, Dual Row, 16 Circuits, White

**Documents:**  
[3D Model](#)  
[Drawing \(PDF\)](#)  
[Application Specification AS-98273-001 \(PDF\)](#)  
[Packaging Specification PK-98273-001 \(PDF\)](#)  
[RoHS Certificate of Compliance \(PDF\)](#)

|                               |                                                                                                                                                            |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>General</b>                |                                                                                                                                                            |
| Product Family                | Crimp Housings                                                                                                                                             |
| Series                        | <a href="#">98273</a>                                                                                                                                      |
| Application                   | Power, Wire-to-Wire                                                                                                                                        |
| Comments                      | 7 Amps max @85°C for NSCC terminal <a href="#">98897</a> with 2.00 mm² wire or 15 Amps max @85°C for UCC terminal <a href="#">98898</a> with 4.00 mm² wire |
| Overview                      | <a href="#">NSCC - New Standard Casing Contact</a>                                                                                                         |
| Product Name                  | NSCC                                                                                                                                                       |
| UPC                           | 822348213153                                                                                                                                               |
| <b>Physical</b>               |                                                                                                                                                            |
| Circuits (maximum)            | 16                                                                                                                                                         |
| Circuits Detail               | 4x2.8mm 12x1.5mm female terminals                                                                                                                          |
| Color - Resin                 | Natural, Natural (White)                                                                                                                                   |
| Gender                        | Female                                                                                                                                                     |
| Glow-Wire Compliant           | No                                                                                                                                                         |
| Lock to Mating Part           | Yes                                                                                                                                                        |
| Material - Resin              | Polyester, Polyester Alloy                                                                                                                                 |
| Net Weight                    | 19.160/g                                                                                                                                                   |
| Number of Rows                | 2                                                                                                                                                          |
| Packaging Type                | Bag                                                                                                                                                        |
| Panel Mount                   | No                                                                                                                                                         |
| Pitch - Mating Interface      | 3.33mm, 6.00mm                                                                                                                                             |
| Polarized to Mating Part      | Yes                                                                                                                                                        |
| Ports                         | 1                                                                                                                                                          |
| Stackable                     | No                                                                                                                                                         |
| Temperature Range - Operating | -40°C to +85°C                                                                                                                                             |
| <b>Electrical</b>             |                                                                                                                                                            |
| Current - Maximum per Contact | 15A, 7A                                                                                                                                                    |

**Material Info**

**Reference - Drawing Numbers**

[Application Specification](#) AS-98273-001  
[Packaging Specification](#) PK-98273-001  
[Sales Drawing](#) SD-98273-001, SD-98273-002

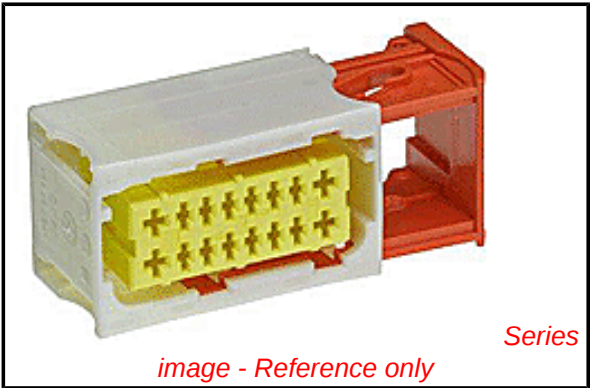


image - Reference only

**EU RoHS**  
**ELV and RoHS**  
**Compliant**  
**REACH SVHC**  
**Contains SVHC: No**  
**Low-Halogen Status**  
**Low-Halogen**

**China RoHS**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
[98273Series](#)

**Mates With**  
[98276-1004](#)

**Use With**  
[98897](#) NSCC Terminals, [98898](#) UCC2 Terminals