





## LBN7007 SAW Filter Electrical Characteristic

<i>Specifications</i>				
Parameter	Unit	Minimum	Typical	Maximum
<b>Center Frequency</b>	MHz	69.8	70	70.2
<b>Insertion Loss</b>	dB		22.9	27.5
<b>1 dB Bandwidth</b>	MHz	25.6	26.3	
<b>3 dB Bandwidth</b>	MHz	28.0	28.6	
<b>40 dB Bandwidth</b>	MHz		36.2	37.7
<b>Passband Variation</b>	dB		0.5	1.0
<b>Phase Linearity</b>	degrees		3.5	5
<b>Group Delay Variation</b>	nsec		20	40
<b>Absolute Delay</b>	usec		1.4	
<b>Ultimate Rejection</b>	dB	45	55	
<b>Substrate Material</b>		128-LiNbO <sub>3</sub>		
<b>Ambient Temperature</b>	° C	25		
<b>Package Size</b>	DIP2212 (22.2x12.6x5.2mm <sup>3</sup> )			


### *Typical Performance*

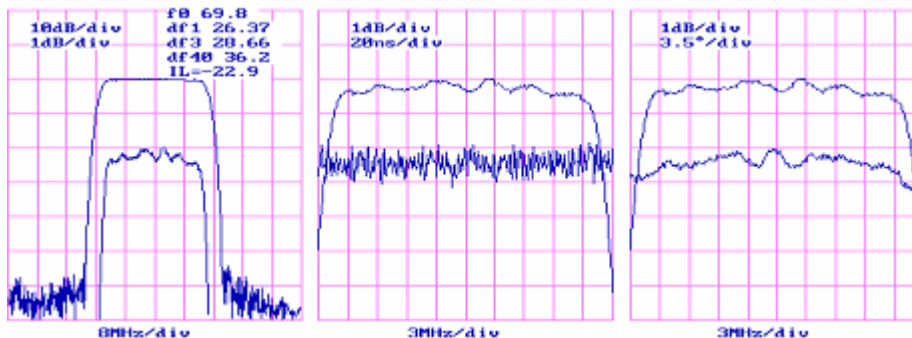

### *Package Outline*

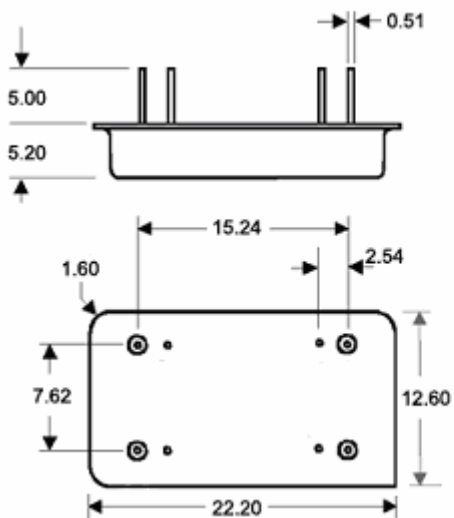

### *Matching Configuration*

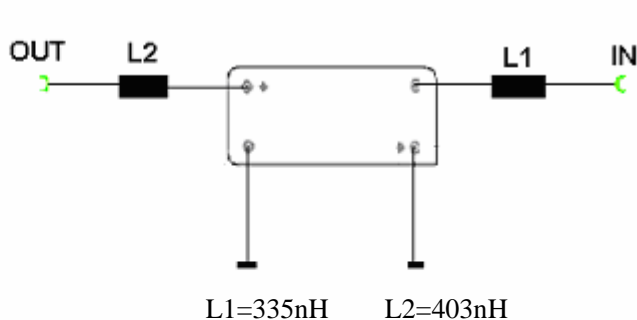

Source/Load Impedance=50 ohm

Notes - Component values may change depending on board layout.