③

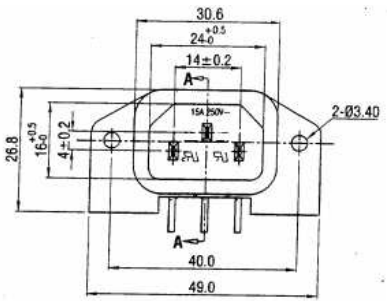





Notes:

A. Material:
1. Housing: PBT WITH G/F30% UL 94V-0 Color:Black
2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:
1. Rating: 15A 250V~ (UL,CUL)
10A 250V~(CCC,VDE,SEMKO,NEMKO,FIMKO,DEMKO,SAA)
2. Electric Strength: AC 2,000 V FOR ONE MINUTE
3. Insulation Resistance: 100MΩ MIN, AT 500V DC

C. Approvals:
UL, CUL, CCC, VDE, SEMKO, NEMKO, FIMKO, DEMKO, SAA

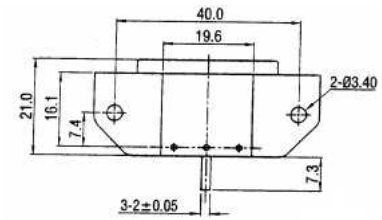





SECTION A-A







PANEL CUT-OUT




PCB LAYOUT

**RoHS compliant**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Scale | 1:1 | | | | | | Date | Name | Customer-No. |
| TOLERANCE | | | | | | Drawn | 14.12.2007 | N.Schulz | |
| X.X | ±0.3 | | | | | Approved | 17.12.2012 | Winnie | ASSMANN WSW-No. A-KGS-F/A |
| X.XX | ±0.2 | | | | | | | | |
| X.XXX | ±0.1 | ③ | Change of plant | 17.12.2012 | Winnie | | | | Drawing-No. ASS 0889A CO rev03 |
| DIM | TOL | ② | Update | 08.07.2009 | Dean | | | | |
| Ang. | ±3° | ① | Drawn | 14.12.2007 | N.Schulz | | | | |
| | | | | | | | | | Replace SHEET |
| UNIT | mm | Id. | Modification | Date | Name | | | | |

ASSMANN WSW components