High Voltage Fast-Switching NPN Power Transistor

FEATURES

- High Voltage Capability
- Fast Switching Speed
- Pb-free plating
- RoHS compliant

APPLICATION

- Electronic Ballast
- Switch mode power supply

KEY PERFORMANCE PARAMETERS			
PARAMETER		**VALUE**	**UNIT**
BV_{CEO}		450	V
BV_{CBO}		1050	V
I_C		2.5	A
$V_{CE(SAT)}$	I_C=0.7A, I_B=0.14A	0.5	V

Pb-Free

RoHS COMPLIANT

TO-220





Notes: Moisture sensitivity level: level 3. Per J-STD-020

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)			
PARAMETER	**SYMBOL**	**LIMIT**	**UNIT**
Collector-Base Voltage	V_{CBO}	1050	V
Collector-Emitter Voltage @ V_{BE}=0V	V_{CES}	450	V
Emitter-Base Voltage	V_{EBO}	15	V
Collector Current	I_C	2.5	A
Collector Peak Current (tp <5ms)	I_{CM}	4	A
Base Current	I_B	1.5	A
Base Peak Current (tp <5ms)	I_{BM}	3	A
Power Total Dissipation @ T_A=25ºC	P_{DTOT}	60	W
Maximum Operating Junction Temperature	T_J	+150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

THERMAL PERFORMANCE			
PARAMETER	**SYMBOL**	**LIMIT**	**UNIT**
Junction to Case Thermal Resistance	$R_{\Theta JC}$	1.8	°C/W
Junction to Ambient Thermal Resistance	$R_{\Theta JA}$	62.5	°C/W

ELECTRICAL SPECIFICATIONS (T_A = 25°C unless otherwise noted)						
PARAMETER	**CONDITIONS**	**SYMBOL**	**MIN**	**TYP**	**MAX**	**UNIT**
Collector-Base Voltage	I_C =0.5mA	BV_{CBO}	1050	--	--	V
Collector-Emitter Breakdown Voltage	I_C =5mA	BV_{CEO}	450	--	--	V
Emitter-Base Breakdown Voltage	I_E =1mA	BV_{EBO}	15	--	--	V
Collector Cutoff Current	V_{CE} =400V, I_B=0	I_{CEO}	--	10	250	μA
Collector Cutoff Current	V_{CB} =950V, I_E =0	I_{CBO}	--	--	10	μA
Collector-Emitter Saturation Voltage	I_C=0.7A, I_B =0.14A	$V_{CE(SAT)}1$	---	--	0.5	V
Collector-Emitter Saturation Voltage	I_C=2A, I_B =0.6A	$V_{CE(SAT)}2$	---	1.5	2.0	V
Base-Emitter Saturation Voltage	I_C=2A, I_B =0.6A	$V_{BE(SAT)}1$	--	1.0	1.5	V
DC Current Gain	V_{CE} =5V, I_C =0.1A	$h_{FE}1$	50	70	100	
	V_{CE} =3V, I_C =0.5A	$h_{FE}2$	18	24	50	
Rise Time (Note 2)	V_{CC} =5V, I_C =0.5A	t_r	--	--	1	μs
Storage Time (Note 2)		t_{STG}	2.5	3	3.5	μs
Fall Time (Note 2)		t_f	--	--	1.2	μs
Repetitive Avalanche Energy	L=2mH	E_{AR}	5	--	--	mJ

Notes:

1. Pulse test: ≤380μs, duty cycle ≤ 2%
2. For DESIGN AID ONLY, not subject to production testing.

ORDERING INFORMATION

PART NO.	PACKAGE	PACKING
TSC741CZ C0	TO-220	50pcs / Tube

Note:

1. Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC

PACKAGE OUTLINE DIMENSIONS (Unit: Millimeters)

TO-220

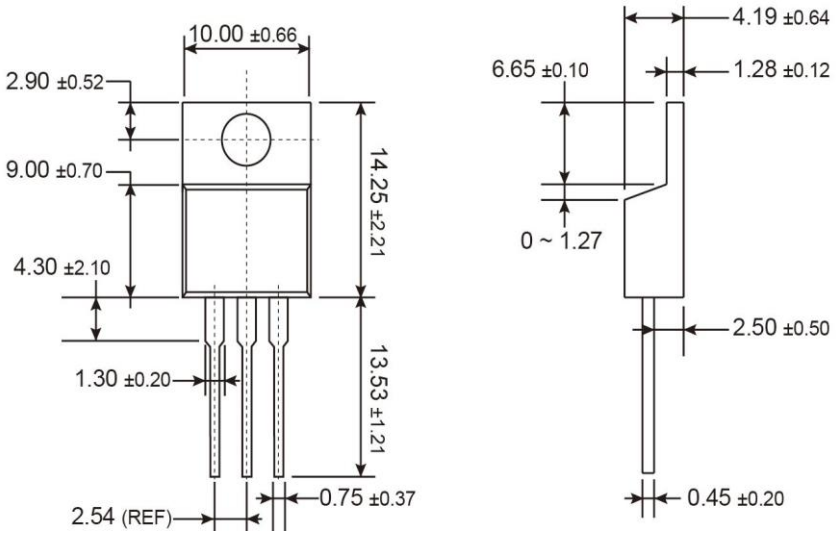

Marking Diagram



Y = Year Code

M = Month Code for Halogen Free Product

	A	=Jan	**B**	=Feb	**C**	=Mar	**D** =Apr
`	**E**	=May	**F**	=Jun	**G**	=Jul	**H** =Aug
	I	=Sep	**J**	=Oct	**K**	=Nov	**L** =Dec

L = Lot Code (1~9, A~Z)

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.