
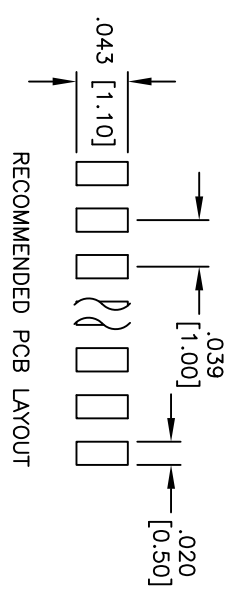
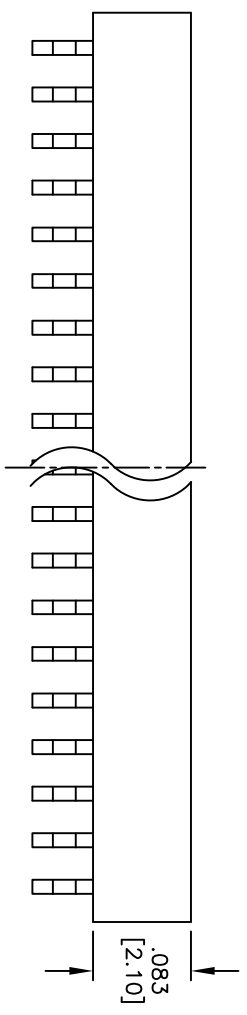
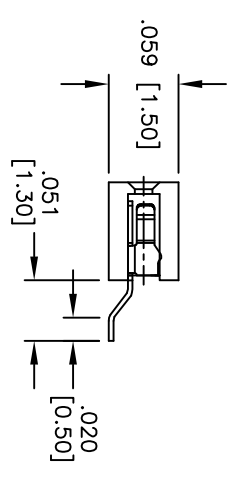


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/14/11	

APPROVED: _____
 DATE: _____ TITLE: _____

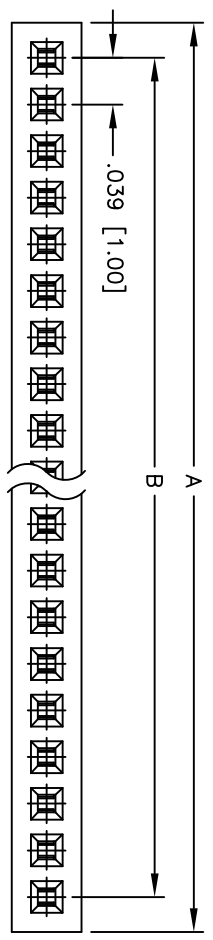

A = .039 [1.00] x No. of Positions + .020 [0.50]
 B = .039 [1.00] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .039 [1.00] SINGLE ROW RECEPTACLE STRIP
 RIGHT ANGLE, SMT TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	1/14/11
APPROVED	

SIZE	PART NO.	REV.
X	IRS1R-XX-G-SMT	
REF:	SCALE: NTS	SHEET 1 OF 1

SPECIFICATIONS:
 Material: Insulator: LCP, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate overall.
 Electrical: Current rating: 0.5Amps max.
 Contact resistance: 40 mohms max.
 Insulation resistance: 500 Mohms min.
 Dielectric withstanding voltage: 200 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, ROHS compliant
 Recommended soldering temp: 260°C for 5 seconds

