



**CHENG-YI
ELECTRONIC**

SS22A thru SS210A

PB FREE PRODUCT

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

FEATURES


- * Ideal for surface mounted applications
- * Low leakage current
- * Metallurgically bonded construction
- * Mounting position: Any
- * Weight: 0.066 gram

MECHANICAL DATA

- * Epoxy: Device has UL flammability classification 94V-O



SMA / DO-214AC

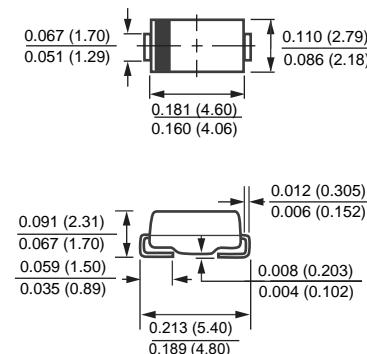

Dimensions in inches and (millimeters)

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	SS22A	SS23A	SS24A	SS25A	SS26A	SS28A	SS210A	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	Volts
Maximum DC Blocking Voltage	V _{dc}	20	30	40	50	60	80	100	Volts
Maximum Average Forward Rectified Current at Derating Lead Temperature	I _O					2.0			Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}				50				Amps
Typical Thermal Resistance (Note 1)	R _{θJA}				40				°C/W
Typical Junction Capacitance (Note 2)	C _J				50				pF
Operating Temperature Range	T _J				-65 to +150				°C
Storage Temperature Range	T _{STG}				-65 to +150				°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	SS22A	SS23A	SS24A	SS25A	SS26A	SS28A	SS210A	UNITS
Maximum Instantaneous Forward Voltage at 2.0A DC	V _F	.55			.70		.85		Volts
Maximum Average Reverse Current @ TA = 25°C	I _R				0.5				mAmps
at Rated DC Blocking Voltage @ TA = 100°C					20				mAmps

NOTES : 1. Thermal Resistance (Junction to Ambient).

2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

3. P.C.B Monuted with 0.2X0.2" (5.0X5.0mm²) copper pad area.

RATING AND CHARACTERISTIC CURVES (SS22A THRU SS210A)

