



Features

- DC to 1 GHz
- Flanged model
- Low VSWR
- Lead free and RoHS compliant*

Applications

- High power RF transmission

CHF11050CBF Series 400 W Power RF Flanged Resistor


General Specifications

SubstrateBeo
 Resistive Film.....Thick Film
 TabAg
 Cover Substrate.....AL203
 Mounting FlangeCu plated with Ni
 Resistance.....50 Ω
 Tolerance.....±5 %
 Packaging20 pcs./box


Absolute Ratings

Power.....400 W
 Frequency1.0 GHz
 VSWR1.20 Maximum

Characteristic Curve

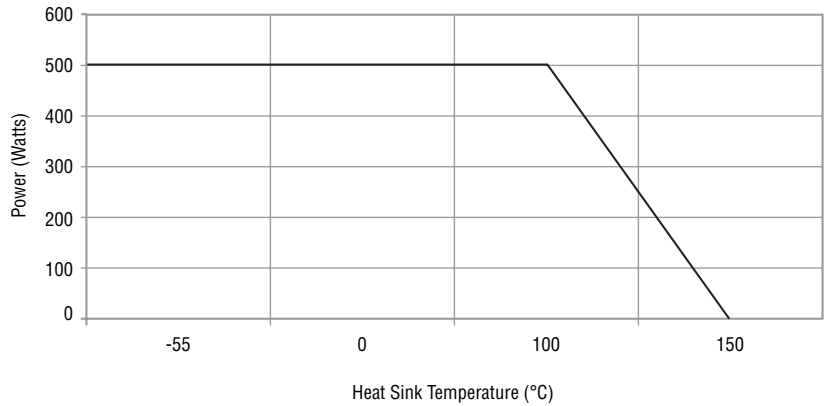

Product Dimensions

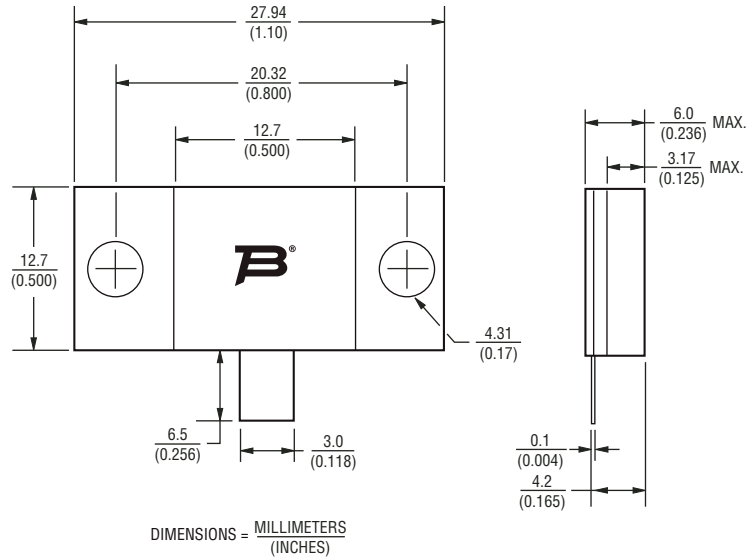

Reliable Electronic Solutions

Asia-Pacific:
 Tel: +886-2 2562-4117
 Fax: +886-2 2562-4116

Europe:
 Tel: +41-41 768 5555
 Fax: +41-41 768 5510

The Americas:
 Tel: +1-951 781-5500
 Fax: +1-951 781-5700

www.bourns.com

How To Order

CHF 11050 C B F 500 L

Model _____
 Size _____
 Version _____
 Substrate _____
 Mount _____
 F = Flange
 Value _____
 500 = 50 Ohm
 Function _____
 L = Termination
 R = Resistor

*RoHS Directive 2002/95/EC Jan 27 2003, including Annex
 Specifications are subject to change without notice.
 Customers should verify actual device performance in their specific applications.