


Film, Metallized Polypropylene, DC Link, C4DE, 100 uF, 10%, 1,000 V

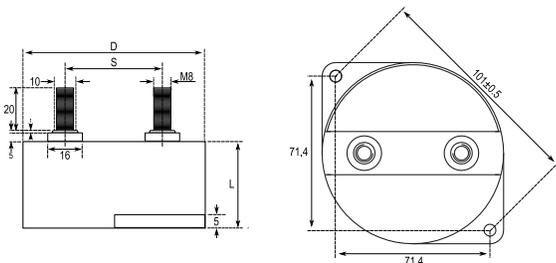

**Dimensions**

<b>D</b>	84mm +/-0.5mm
<b>L</b>	64mm +/-2mm
<b>S</b>	45mm +/-1mm
<b>LL</b>	20mm NOM

**Packaging Specifications**

<b>Mounting:</b>	Flange Mount
<b>Packaging:</b>	Bulk
<b>Packaging Quantity:</b>	12

**General Information**

<b>Dielectric:</b>	Metallized Polypropylene
<b>Style:</b>	Can
<b>Series:</b>	C4DE
<b>RoHS:</b>	Yes
<b>Lead:</b>	Threaded Studs M8
<b>Miscellaneous:</b>	32 Amps (10kHz, 85C)

**Specifications**

<b>Capacitance:</b>	100 uF
<b>Capacitance Tolerance:</b>	10%
<b>Voltage DC:</b>	1000 VDC
<b>Temperature Range:</b>	-40/+85C
<b>Rated Temperature:</b>	85C
<b>Max dVdt:</b>	27 V
<b>Resistance:</b>	1.3 mOhms (10kHz)
<b>Current:</b>	86 Amps (10kHz 25C), 72 Amps (10kHz 45C), 56 Amps (10kHz 65C)
<b>Inductance:</b>	40 nH