


TO-220-3L Plastic-Encapsulate Voltage Regulators

CJ7806H Three-terminal positive voltage regulator

FEATURES

- **Maximum Output current I_{OM} : 1.5 A**
- **Output voltage V_o : 6 V**
- **Continuous total dissipation is internally limited**

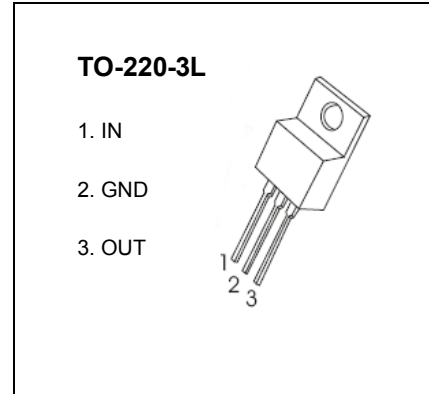

ABSOLUTE MAXIMUM RATINGS (operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	83.3	$^{\circ}C/W$
Thermal Resistance from Junction to Case	$R_{\theta JC}$	8.3	$^{\circ}C/W$
Operating Junction Temperature Range	T_{OPR}	0~+150	$^{\circ}C$
Storage Temperature Range	T_{STG}	-55~+150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=11V, I_o=500mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output voltage	V_o	$25^{\circ}C$	5.75	6	6.25	V
		$8V \leq V_i \leq 21V, I_o=5mA-1A, P \leq 15W$ $0-125^{\circ}C$	5.7	6	6.3	V
Load regulation	ΔV_o	$I_o=5mA-1.5A$ $25^{\circ}C$		1.3	120	mV
		$I_o=250mA-750mA$ $25^{\circ}C$		0.5	60	mV
Line regulation	ΔV_o	$8V \leq V_i \leq 25V$ $25^{\circ}C$		0.5	120	mV
		$9V \leq V_i \leq 13V$ $25^{\circ}C$		0.8	60	mV
Quiescent current	I_q	$25^{\circ}C$		3.8	8	mA
Quiescent current change	ΔI_q	$8V \leq V_i \leq 25V$ $0-125^{\circ}C$		0.8	1.3	mA
		$5mA \leq I_o \leq 1A$ $0-125^{\circ}C$		0.08	0.5	mA
Output voltage drift	$\Delta V_o / \Delta T$	$I_o=5mA$ $0-125^{\circ}C$		-0.8		mV/ $^{\circ}C$
Output noise voltage	V_N	$10Hz \leq f \leq 100kHz$ $25^{\circ}C$		45		μV
Ripple rejection	RR	$9V \leq V_i \leq 19V, f=120Hz$ $0-125^{\circ}C$	59	75		dB
Dropout voltage	V_d	$I_o=1A$ $25^{\circ}C$		2		V
Output resistance	R_o	$f=1kHz$ $25^{\circ}C$		10		m Ω
Short circuit current	I_{sc}	$25^{\circ}C$		550		mA
Peak current	I_{pk}	$25^{\circ}C$		2.2		A

TYPICAL APPLICATION

