


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/13/07	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

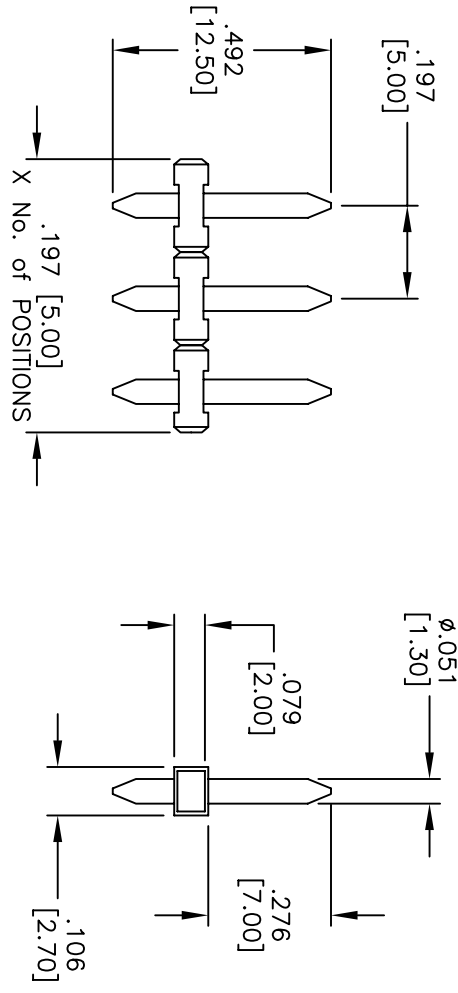

2 thru 24 Poles Available

**SPECIFICATIONS:**  
 Material: Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Pins: Brass, Nickel or Tin plated  
 Electrical:  
 Operation voltage: 300V max  
 Current rating: 10 Amps max per Pole  
 Insulation resistance: 5000 Mohms min @ 1000V  
 Dielectric withstanding voltage: 1600 VAC for 1 minute  
 Environmental:  
 Operating temperature: -30°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZE		DATE	
.X	± .10	Ø.X	± .10		
.XX	± .020	Ø.XXX	± .015		
.XXX	± .015	Ø.XXX	± .010		
DRAWN		SS		6/13/07	
CHECKED					
APPROVED					
TITLE		SIZE		PART NO.	
PLUGGABLE HEADER, 5.00mm		X		EBT-XX-C	
2 THRU 24 PINS		REF:		SCALE: NTS	
ADAM TECH		909 Rahway Avenue, Union, NJ 07083		REV.	
Phone: 908-687-5000 Fax: 908-687-5710				SHEET 1 OF 1	

6 5 4 3 2 1