



Dual Junction Isolator With 40 dB Isolation From 11 GHz to 18 GHz, 5 Watts And SMA Female

Isolators Technical Data Sheet

PE831R1024

Features

- Dual Junction Isolator
- Frequency Range of 11 to 18 GHz
- Female SMA Connectors
- Low VSWR

Applications

- Radar Systems
- Military
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

Description

The PE831R1024 is a dual junction isolator offering 40 dB minimum of isolation over an operational frequency band of 11 to 18 GHz. This coaxial part uses SMA female connectors on all ports and has a power rating of 5 watts in forward and 1 watt in reverse direction.

Pasternack Enterprises offers a wide variety of isolators to fit your needs. These are two-port devices that transmit microwave or radio frequency power in one direction only and block the signal in the opposite direction. They can be thought of as a diode for RF energy. Isolators are used to isolate equipment from the effects of conditions outside of the equipment. For instance they are used to prevent a microwave source being detuned by a mismatched load. Pasternack's isolators feature excellent insertion loss, high isolation and reliability.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	11		18	GHz
Impedance		50		Ohms
Insertion Loss			1.2	dB
Isolation	40			dB
VSWR			1.25:1	
Forward Power, CW			5	Watts
Reverse Power, CW			1	Watts

Mechanical Specifications

Size	
Length	1.26 in [32 mm]
Width	0.56 in [14.22 mm]
Height	0.98 in [24.89 mm]
Weight	0.09 lbs [40.82 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Dual Junction Isolator With 40 dB Isolation From 11 GHz to 18 GHz, 5 Watts And SMA Female PE831R1024](#)



Dual Junction Isolator With 40 dB Isolation From 11 GHz to 18 GHz, 5 Watts And SMA Female

Isolators Technical Data Sheet

PE83IR1024

Configuration

Design	Dual Junction
Package Style	Connectorized
Connector 1	SMA Female
Connector 2	SMA Female

Environmental Specifications

Temperature


Operating Range	+0 to +70 deg C
-----------------	-----------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

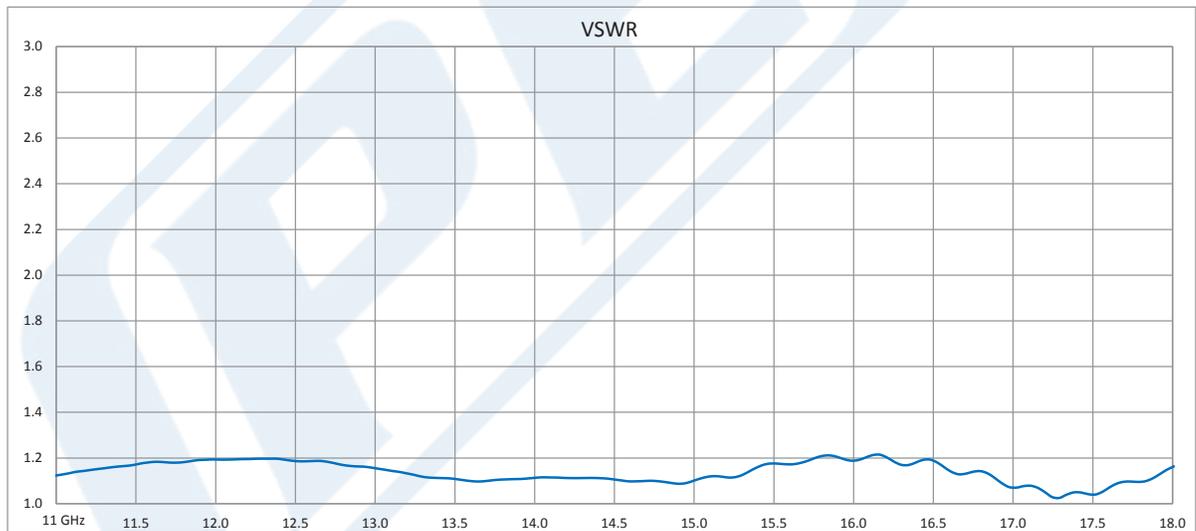

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Dual Junction Isolator With 40 dB Isolation From 11 GHz to 18 GHz, 5 Watts And SMA Female PE83IR1024](#)



Dual Junction Isolator With 40 dB Isolation From 11 GHz to 18 GHz, 5 Watts And SMA Female

Isolators Technical Data Sheet

PE83IR1024

Dual Junction Isolator With 40 dB Isolation From 11 GHz to 18 GHz, 5 Watts And SMA Female from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Dual Junction Isolator With 40 dB Isolation From 11 GHz to 18 GHz, 5 Watts And SMA Female PE83IR1024](https://www.pasternack.com/dual-junction-isolator-40db-isolation-18-ghz-5-watts-sma-female-pe83ir1024-p.aspx)

URL: <https://www.pasternack.com/dual-junction-isolator-40db-isolation-18-ghz-5-watts-sma-female-pe83ir1024-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE83IR1024 CAD Drawing

Dual Junction Isolator With 40 dB Isolation From 11 GHz to 18 GHz, 5 Watts And SMA Female

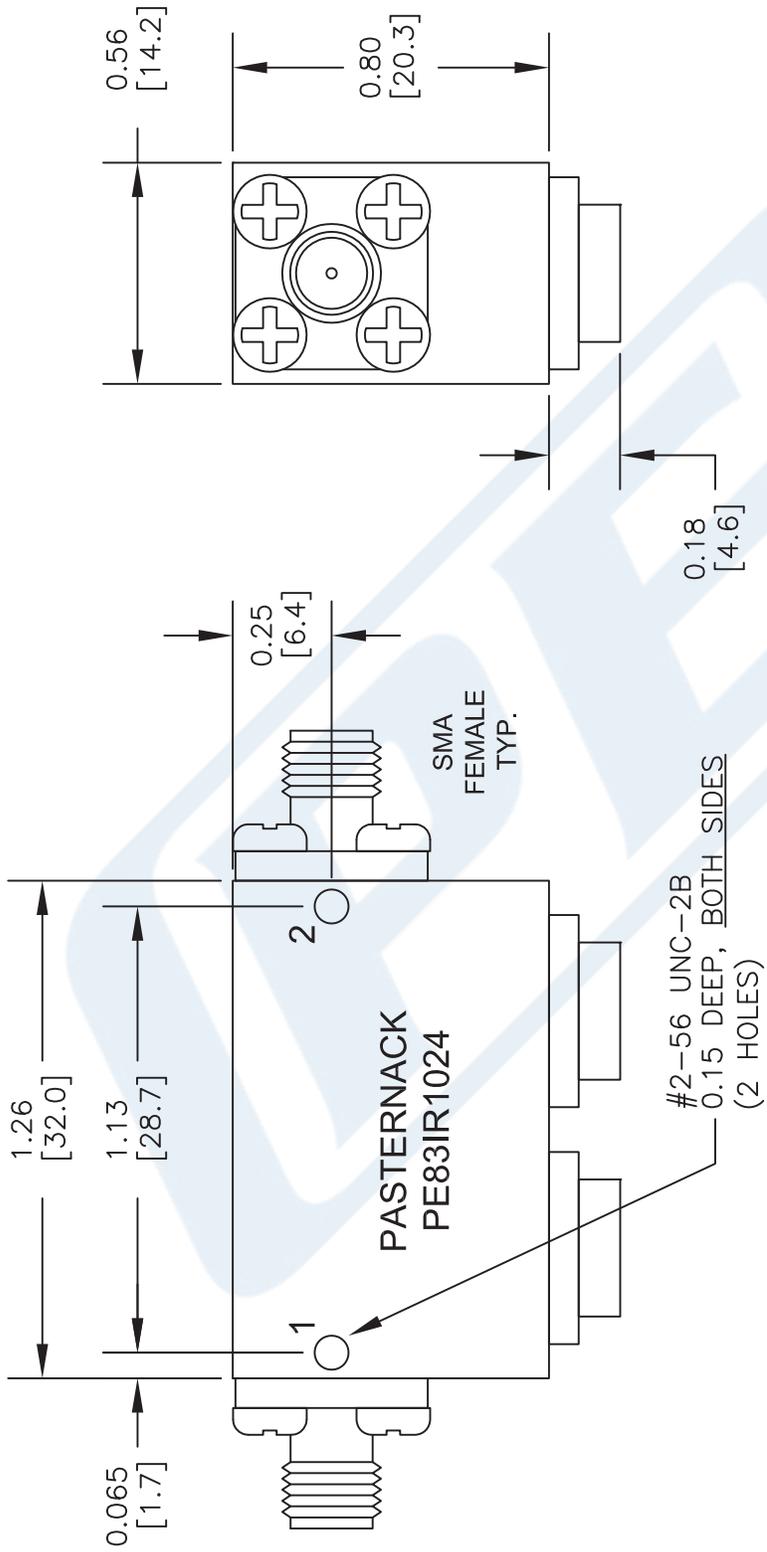

DWG TITLE

PE83IR1024

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 041216

SCALE N/A

SIZE A

2233

PE PASTERNAK
 THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com