

Thin Film Surface Mount Attenuators

OBSOLETE

PFC A1206 Attenuator Series


- Excellent high frequency characteristics
- Available in 50Ω and 75Ω impedances
- Ultra-reliable TaNFilm® element
- Absolute TCR $\pm 100\text{ppm}/^\circ\text{C}$



Electrical Data

Attenuation	Impedance	Tolerance (typical from 0 to 6GHz)	TCR (ppm/°C)	Power
1dB	50Ω, 75Ω	$\pm 0.3\text{dB}$	± 100	0.125W
2dB	50Ω, 75Ω	$\pm 0.3\text{dB}$	± 100	0.125W
3dB	50Ω, 75Ω	$\pm 0.3\text{dB}$	± 100	0.125W
4dB	50Ω, 75Ω	$\pm 0.5\text{dB}$	± 100	0.125W
5dB	50Ω, 75Ω	$\pm 0.5\text{dB}$	± 100	0.125W
6dB	50Ω, 75Ω	$\pm 1.0\text{dB}$	± 100	0.125W
7dB	50Ω, 75Ω	$\pm 1.0\text{dB}$	± 100	0.125W
8dB	50Ω, 75Ω	$\pm 1.0\text{dB}$	± 100	0.125W
9dB	50Ω, 75Ω	$\pm 1.0\text{dB}$	± 100	0.125W
10dB	50Ω, 75Ω	$\pm 1.0\text{dB}$	± 100	0.125W
20dB	50Ω, 75Ω	$\pm 2.0\text{dB}$	± 100	0.125W


Outline and Packaging Data

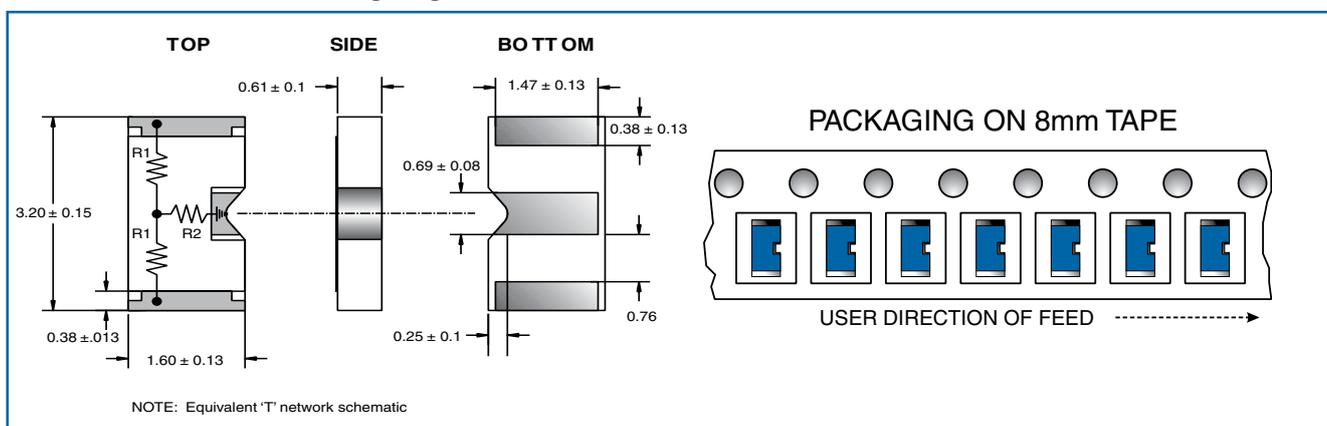


General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

Insertion Loss Data (S21)

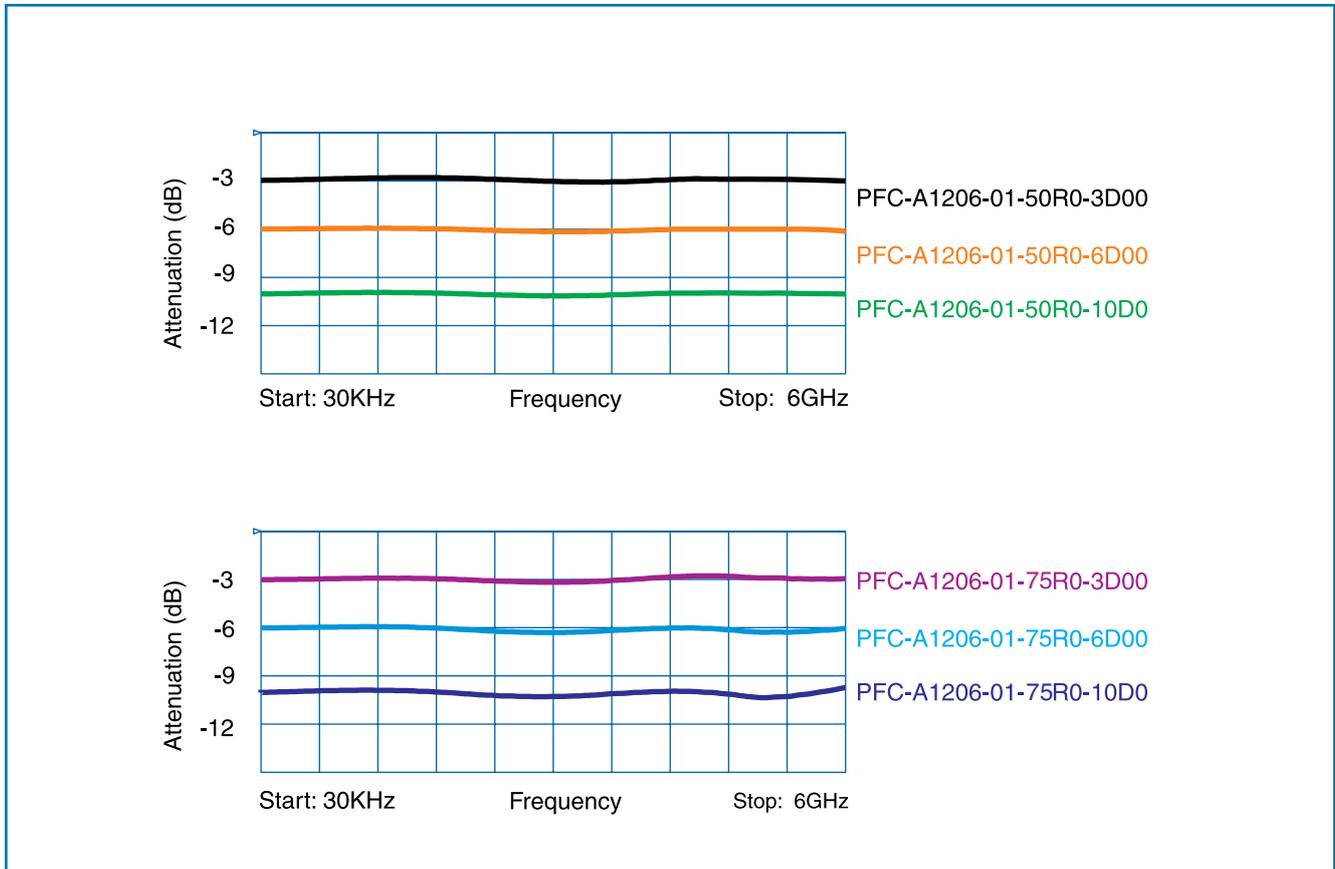

Ordering Data

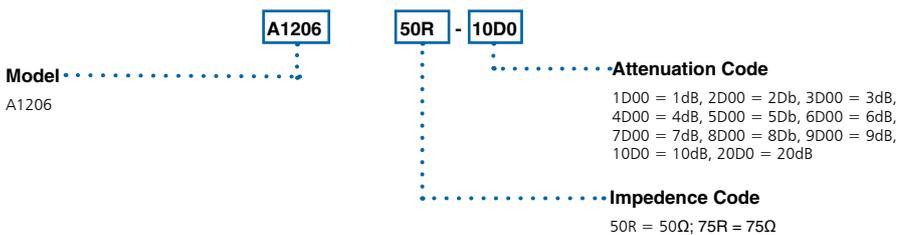

For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.

General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.