


THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

| LTR | DESCRIPTION | DATE | BY |
|-----|-------------|---------|-----|
| - | Released | 2/21/01 | JCL |
| | | | |

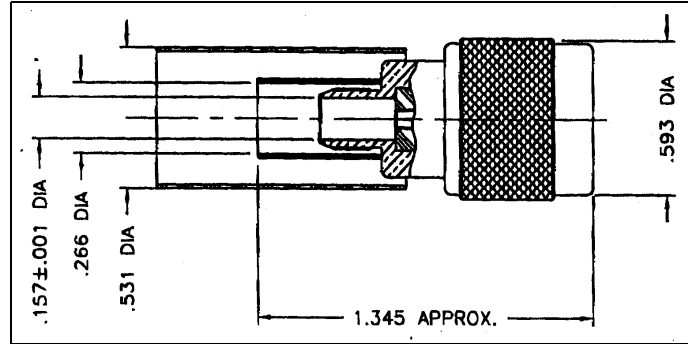

I. MATERIALS & FINISHES

- center contact: GoldPlated Beryllium Copper (spring fit ; non-solder)
- outer contact: Nickel Plated Brass
- coupling nut: Nickel Plated Brass
- body: NickelPlated Brass
- crimp sleeve: Nickel Plated Copper
- dielectric: Teflon® PTFE
- gasket: Silicone Rubber
- shrink sleeve: Adhesive Lined Polyolefin
- crimp size: .255" hex

II. ELECTRICAL PROPERTIES

- impedance: 50 ohms
- working voltage: 500 vrms (max)
- vswr: 1.25:1 (max) up to 6 GHz
- insertion loss: $0.1 \times \sqrt{F}$ ghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

| Approvals | | |
|-----------|-----|---------|
| Drawn | JCL | 2/21/01 |
| | | |
| | | |
| | | |

TIMES MICROWAVE SYSTEMS
 Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

EZ-240-TM
TNC male Straight Plug
for LMR-240 Cable

| | | |
|--------|---------------------------|----------------------------------|
| Size A | CAGE CODE 68999 | Drawing No.: 3190-1128 |
|--------|---------------------------|----------------------------------|