

# P6LG-xxxxELF



## PM4-SERIES

Rev.06-2010

- ✓ 1 Watt
- ✓ Regulated
- ✓ **Single** Output
- ✓ **SIP7** Case
- ✓ **3 kV** DC I/O Isolation
- ✓ Low Ripple and Noise

The PM4 series P6LG-xxxxELF is a family of cost effective 1 W regulated single output DC/DC converters. These converters are in an ultra miniature SIP7 case. Devices are encapsulated. High performance features: Regulated Output, 3000VDC input/output isolation, high efficiency operation, output voltage accuracy of  $\pm 2\%$  maximum, input range of  $\pm 10\%$  tolerance and low output ripple and noise.

All specifications typical at  $T_a=25^\circ\text{C}$ , nominal input voltage and full load unless otherwise specified

### Input Specifications

Voltage Range	$\pm 10\%$
Input Filter	Capacitors
Input Reflected Ripple Current <sup>1</sup>	20 mA pk-pk

### Output Specifications

Voltage Accuracy	$\pm 2\%$
Short Circuit Protection	Short Term
Line Regulation	$\pm 0.5\%$
Load Regulation (0% - 100%)	$\pm 0.5\%$ (3.3Vout Models: $\pm 1.0\%$ )
Ripple and Noise (20Mhz bandwidth)	50 mV pk-pk
Temperature Coefficient	$\pm 0.02\% / ^\circ\text{C}$

### General Specifications

Efficiency	See Table
I/O Isolation Voltage (3 sec.)	3000 VDC
I/O Isolation Capacity	60 pF, typ.
I/O Isolation Resistance	1000 M Ohm
Switching Frequency	50 kHz (Variable)
Humidity	95% rel H
Reliability Calculated MTBF (MIL-HDBK-217F)	> 4.261 Mhrs

### Physical Specifications

Case Material	Non Conductive Black Plastic (UL94V-0 rated)
Potting Material	Epoxy (UL94V-0 rated)
Weight	~ 2.7g, typ.

### Environment Specifications

Operating Temperature	-40 to +85 °C (ambient)
Maximum Case Temperature	100 °C
Storage Temperature	-40 to +125 °C
Cooling	Free Air Convection (10 mm distance required)
RoHS Conform	Soldering 260 °C, max. (1.5 mm from case 10s.)

# Selection Guide



## Single Output

Order #	Input Voltage (VDC)	Input Current No Load (mA)	Input Current Full Load (mA)	Output Voltage (VDC)	Output Current Full Load (mA)	Efficiency (%)	Capacitor Load (uF) <sup>2</sup>
<b>SINGLE OUTPUT</b>							
P6LG-053R3ELF	5	30	385	3.3	333	57	220
P6LG-0505ELF	5	30	307	5	200	65	220
P6LG-057R2ELF	5	30	307	7.2	138.9	65	220
P6LG-0509ELF	5	35	307	9	111.1	65	220
P6LG-0512ELF	5	35	294	12	83.3	68	220
P6LG-0515ELF	5	35	294	15	66.7	68	220
P6LG-123R3ELF	12	20	160	3.3	333	57	220
P6LG-1205ELF	12	20	132	5	200	63	220
P6LG-127R2ELF	12	20	128	7.2	138.9	65	220
P6LG-1209ELF	12	20	126	9	111.1	66	220
P6LG-1212ELF	12	20	122	12	83.3	68	220
P6LG-1215ELF	12	20	126	15	66.7	66	220
P6LG-243R3ELF	24	10	76	3.3	333	60	220
P6LG-2405ELF	24	10	64	5	200	65	220
P6LG-247R2ELF	24	10	64	7.2	138.9	65	220
P6LG-2409ELF	24	10	61	9	111.1	68	220
P6LG-2412ELF	24	10	61	12	83.3	68	220
P6LG-2415ELF	24	10	61	15	66.7	68	220

If you need other specifications, please enquire.

Notes:

# Package / Pinning / Derating

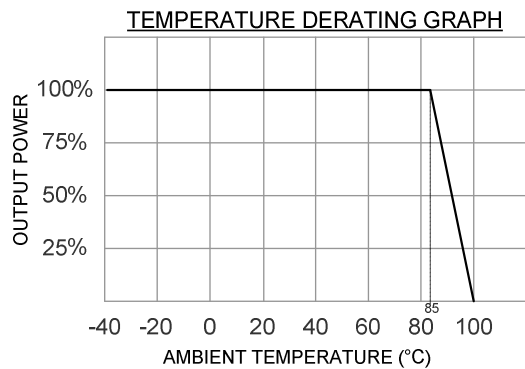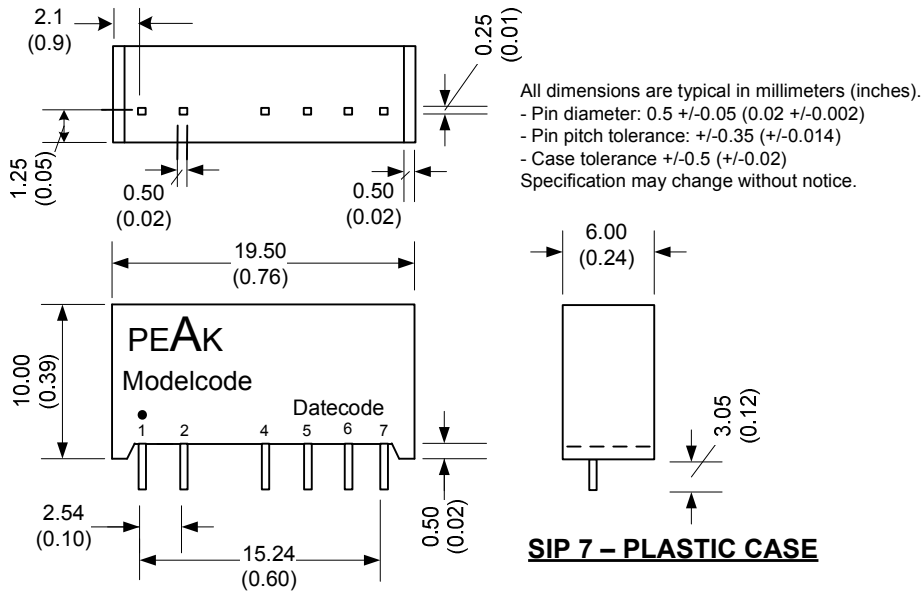

PIN CONNECTIONS	
#	SINGLE (3KV)
1	+Vin
2	- Vin
4	Omitted
5	- Vout
6	Omitted
7	+Vout

## App Notes:

- <sup>1</sup> = Measured Input reflected ripple current with a simulated source inductance of 12uH.
- <sup>2</sup> = Tested by minimal Vin and constant resistive load.