


MI0603J600R-10

**UNCONTROLLED
DOCUMENT**

PHYSICAL DIMENSIONS:

A	1.60 [.063]	+ 0.15	-.006
B	0.80 [.031]	+ 0.15	-.006
C	0.80 [.031]	+ 0.15	-.006
D	0.36 [.014]	+ 0.15	-.006


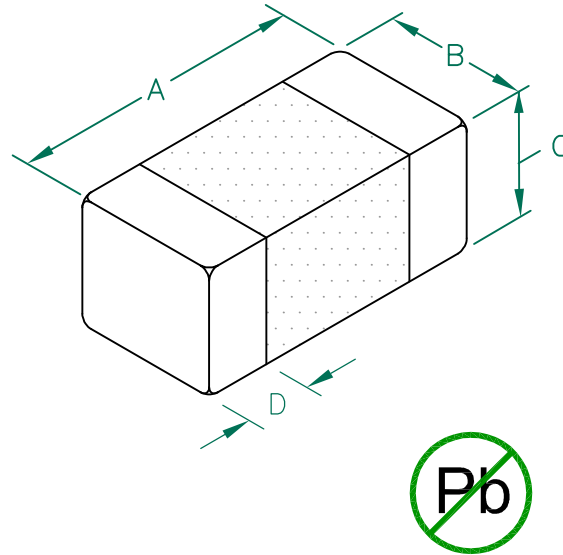


ELECTRICAL CHARACTERISTICS:


	Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	60		
Minimum	45		
Maximum	75	0.100	1000 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL. PAPER TAPE.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
4. OPERATING TEMP. RANGE: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$. (INCLUDING SELF-HEATING)

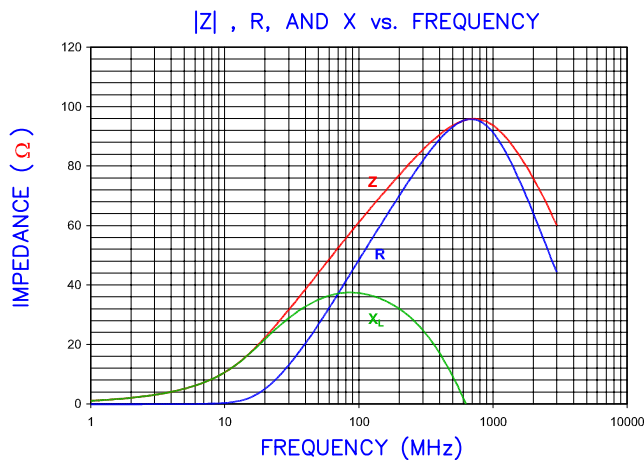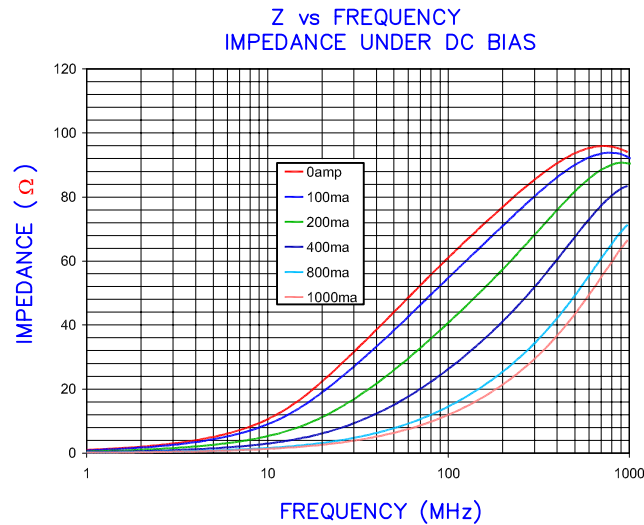


LAND PATTERNS FOR REFLOW SOLDERING

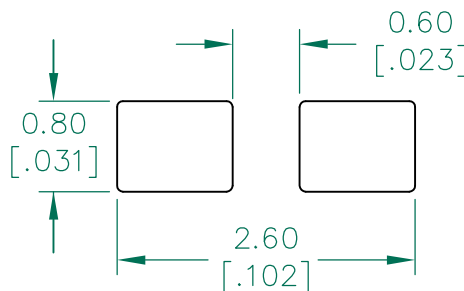

(For wave soldering, add 0.762 [.030] to this dimension)

RECOMMENDED SOLDERING CONDITIONS

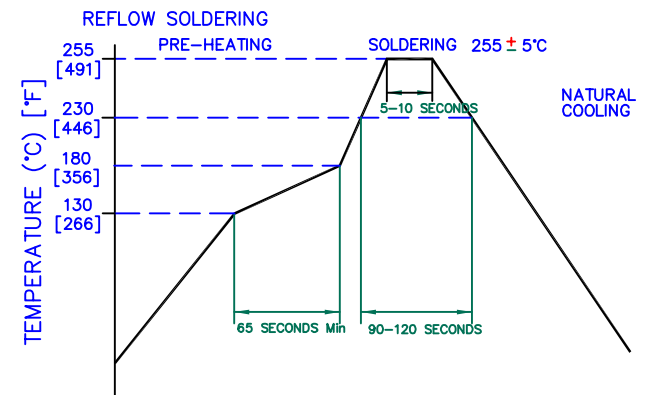

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
E	ADD OPERATING TEMPERATURE UPDATE LAIRD LOGO AND REFLOW CURVE	08/05/13	QU				
D	UPDATE COMPANY LOGO	07/24/08	JRK				
C	CORRECT REEL SIZE AND QTY	04/11/06	JRK				
B	CORRECT REF # FROM 3289 TO 3298	07/22/05	JRK				
A	ORIGINAL DRAFT	04/05/04	TMB				
REV	DESCRIPTION	DATE	INT	PROJECT/PART NUMBER: MI0603J600R-10 DATE: 04/05/04 CAD # MI0603J600R-10-E			
				REV	PART TYPE:	DRAWN BY:	
				E	CO-FIRE	TMB	
				SCALE:		SHEET:	
							1 of 1