


SCALE 2X




▲

SWITCH FUNCTION	
ON	<ON>
1-3	1-2

() = MOMENTARY

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X=\pm 0.4$
 $X.XX=\pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA MAX. @20V MAX AC OR DC)
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/Gold plate over nickle plate
6. CONTACT RESISTANCE: 20mILLI—ohms initial
@2—4VDC
7. ELECTRICAL LIFE: 50,000 make—and—break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
0. OPERATING TEMP.: -30°C to 85°C
1. ▲ DENOTES CRITICAL PARAMETER.

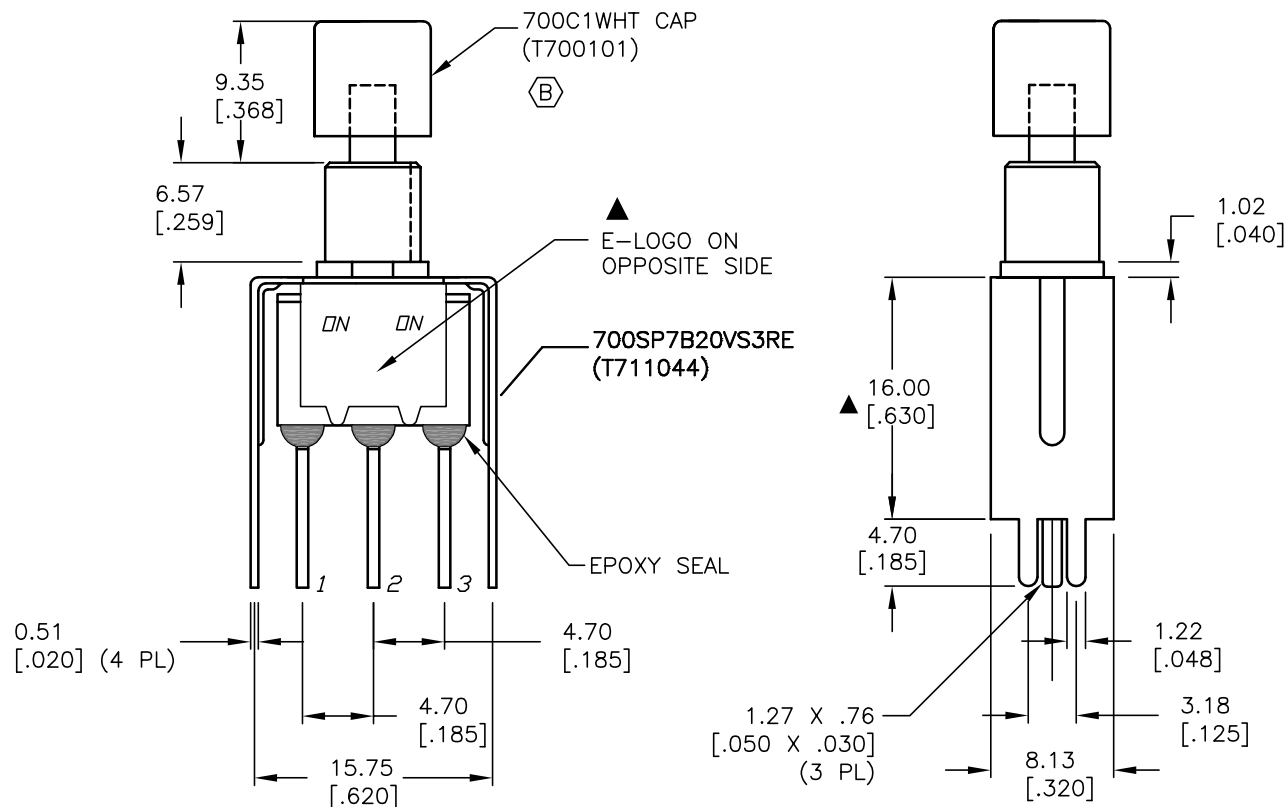**E-SWITCH®**

TITLE

700SP7B20VS3REC1WHT

SCALE 2:1	DATE 6/16/03	DR AR	DWG XT0114P	REV B
--------------	-----------------	----------	----------------	----------

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED