

2.5-4.8GHz 300W 55dB SOLID STATE HIGH POWER AMPLIFIER
MtronPTI P/N: PA4020D



FEATURES

- Rack mounted system
- Class AB linear LDMOS design
- Instantaneous bandwidth
- Suitable for all modulations standards
- Built-in protection circuits
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	2.2 - 4.8 GHz	
Power Output	300 Watt Min	CW
Power Gain	55 dB Min	
Power Gain Flatness	3.0 dB p-p Max	Constant input power
Input Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	>30 dBc Typ	44dBm/Tone, $\Delta = 1\text{MHz}$
Harmonics	>30 dBc Typ	At rated output power
Non Harmonics Spurious	>60dBc	
Operating Voltage	100 - 240 VAC	
Power Consumption	1500 Watt Max	At rated Pout
Max Input Power	+8 dBm	Without damage
Load VSWR Protection	$\infty : 1$	

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	0 to +50 °C	
Storage Temperature	-20 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensing


MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	430 x 133.3 x 560 mm (17 x 5.25 x 22 inch)	3U
Weight	20 kg.	
RF Connectors In / Out	Type-N Female	
AC Power / Interface Connector	IEC 60320-C14 / 9-Pin D-Sub	
Cooling	Built in Fan Cooling	Variable speed
Option: Digital Monitor & Control LCD: FWD, REV, VSWR, GAIN, ALC, V & I, TEMP	1 Ethernet RJ-45 circular connector TCP/IP 1 RS422/485 D-dub 9S port for redundancy	Remote Bluetooth application



2525 Shader Road, Orlando Florida 32804 USA
Phone: 407-298-2000 Fax: 407-293-2979
Website: mtronpti.com NYSE MKT: LGL

2.5-4.8GHz 300W 55dB SOLID STATE HIGH POWER AMPLIFIER
MtronPTI P/N: PA4020D

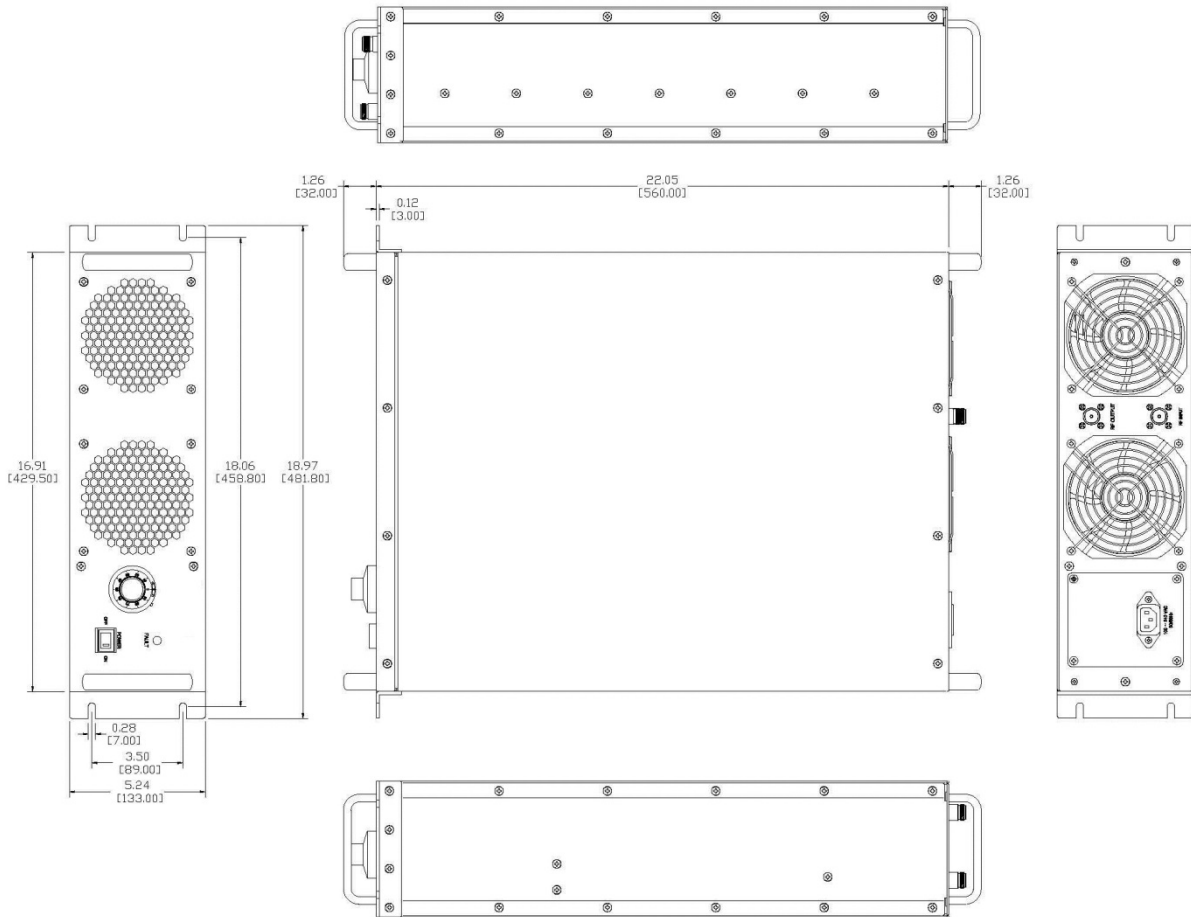

SDF-D3 NSEZ, Noida - 201305 (U.P.), India
1703 E. Highway 50; Yankton, SD 57078, USA