




78L08

Three-terminal positive voltage regulator



1. OUT
 2. GND
 3. IN

TO-92

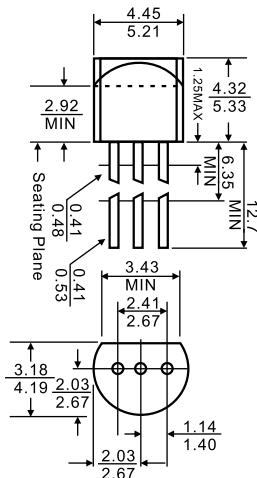

Dimensions in inches and (millimeters)

Features

- ❖ Maximum Output current
 I_{OM} : 0.1 A
 - ❖ Output voltage
 V_o : 8 V
 - ❖ Continuous total dissipation
 P_D : 0.625W


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V _I	30	V
Operating Junction Temperature Range	T _{OPR}	-40~+125	°C
Storage Temperature Range	T _{STG}	-65~+150	°C

ELECTRICAL CHARACTERISTICS (Vi=14V, Io=40mA,Ci=0.33μF,Co=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions		MIN	TYP	MAX	UNIT
Output voltage	V _O			25°C	7.7	8.0	8.3
		10.5V≤V _I ≤23V, I _O =1mA~40mA		0-125°C	7.6	8.0	8.4
		I _O =1mA~70mA			7.6	8.0	8.4
Load Regulation	ΔV _O	I _O =1mA~100mA		25°C		18	80
		I _O =1mA~40mA		25°C		10	40
Line regulation	ΔV _O	10.5V≤V _I ≤23V		25°C		42	175
		11V≤V _I ≤23V		25°C		36	125
Quiescent Current	I _Q			25°C		4	6
Quiescent Current Change	ΔI _Q	11V≤V _I ≤23V		0-125°C			1.5
	ΔI _Q	1mA≤I _O ≤40mA		0-125°C			0.1
Output Noise Voltage	V _N	10Hz≤f≤100KHz		25°C		54	
Ripple Rejection	RR	13V≤V _I ≤23V, f=120Hz		0-125°C	37	46	
Dropout Voltage	V _d			25°C		1.7	


TYPICAL APPLICATION

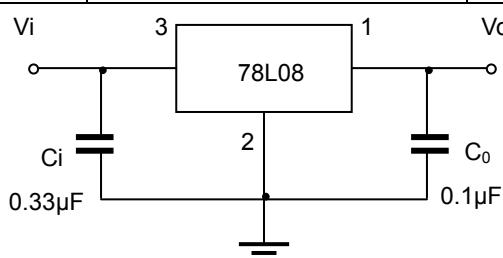


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics


L78L05/12/24 Output Characteristics

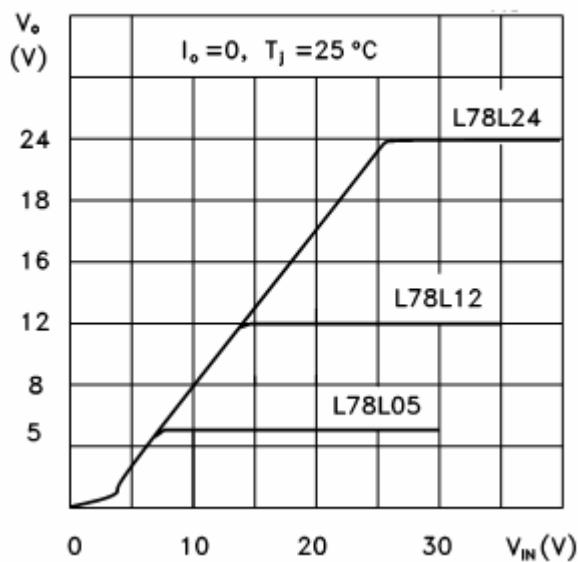


L78L05/12/24 Thermal Shutdown

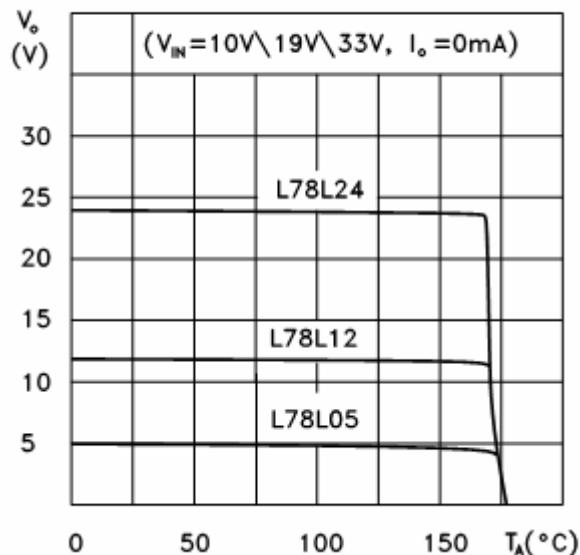

L78L05 Quiescent Current vs Input Voltage

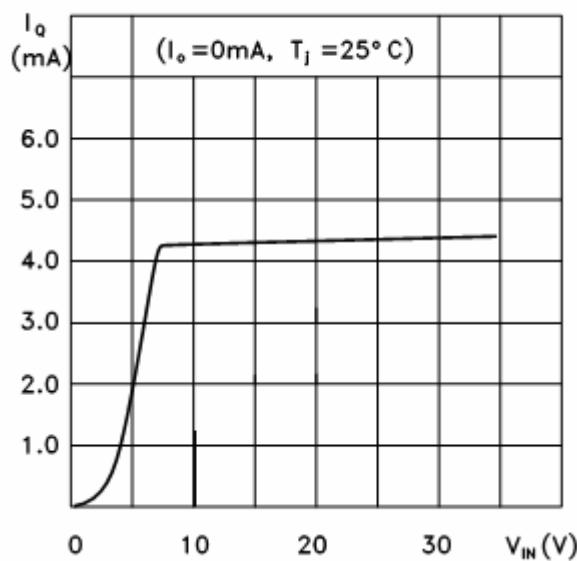

L78L05/12/24 Load Characteristics

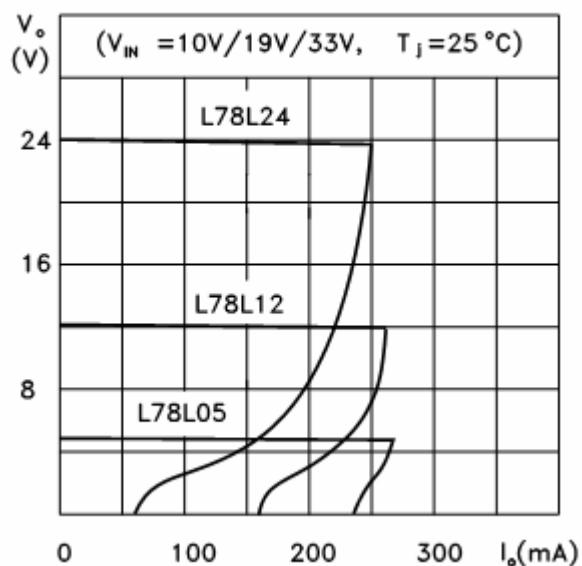

L78L00 Series Short Circuit Output Current

