

MCX Jack Connector Solder Attachment 2 Hole Flange
Solder Cup Terminal, .328 inch Hole Spacing

TECHNICAL DATA SHEET

PE4891

MCX Jack Connector Solder Attachment 2 Hole Flange Solder Cup Terminal, .328 inch Hole Spacing

Configuration

| | |
|--|---------------|
| Connector | MCX Jack |
| Connector Interface Type | Solder Cup |
| Cable Attachment Method (Shield/Contact) | Solder |
| Body Style | Straight |
| Mount Method | 2 Hole Flange |

Electrical Specifications

| | |
|---------------------------------------|---------|
| Frequency Range, GHz | DC to 6 |
| Impedance, Ohms | 50 |
| Maximum Operating Voltage, Volts | 335 |
| Dielectric Withstanding Voltage, Vrms | 1,000 |

Mechanical Specifications

Size

| | |
|---------------------|---------------|
| Length, in [mm] | 0.47 [11.94] |
| Width/Dia., in [mm] | 0.192 [4.88] |
| Height, in [mm] | 0.484 [12.29] |
| Weight, lbs [g] | 0.006 [2.72] |

Connector


| | |
|-------------------------------|------------------------|
| Type | MCX Jack |
| Mating Cycles | 500 |
| Contact Material and Plating | Beryllium Copper, Gold |
| Contact Plating Specification | 3µ in. minimum |
| Body Material and Plating | Brass, Gold |
| Body Plating Specification | 1µ in. minimum |
| Dielectric Type | Teflon |

Compliance Certifications (visit www.Pasternack.com for current document)

| | |
|----------------|-----|
| RoHS Compliant | Yes |
|----------------|-----|

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Jack Connector Solder Attachment 2 Hole Flange Solder Cup Terminal, .328 inch Hole Spacing PE4891](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



MCX Jack Connector Solder Attachment 2 Hole Flange
Solder Cup Terminal, .328 inch Hole Spacing

TECHNICAL DATA SHEET

PE4891

Plotted and Other Data

Notes:

Values at 25 °C, sea level

MCX Jack Connector Solder Attachment 2 Hole Flange Solder Cup Terminal, .328 inch Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [MCX Jack Connector Solder Attachment 2 Hole Flange Solder Cup Terminal, .328 inch Hole Spacing PE4891](http://www.pasternack.com/mcx-jack-standard-solder-cup-terminal-connector-pe4891-p.aspx)

URL: <http://www.pasternack.com/mcx-jack-standard-solder-cup-terminal-connector-pe4891-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE4891 CAD Drawing

MCX Jack Connector Solder Attachment 2 Hole Flange
Solder Cup Terminal, .328 inch Hole Spacing

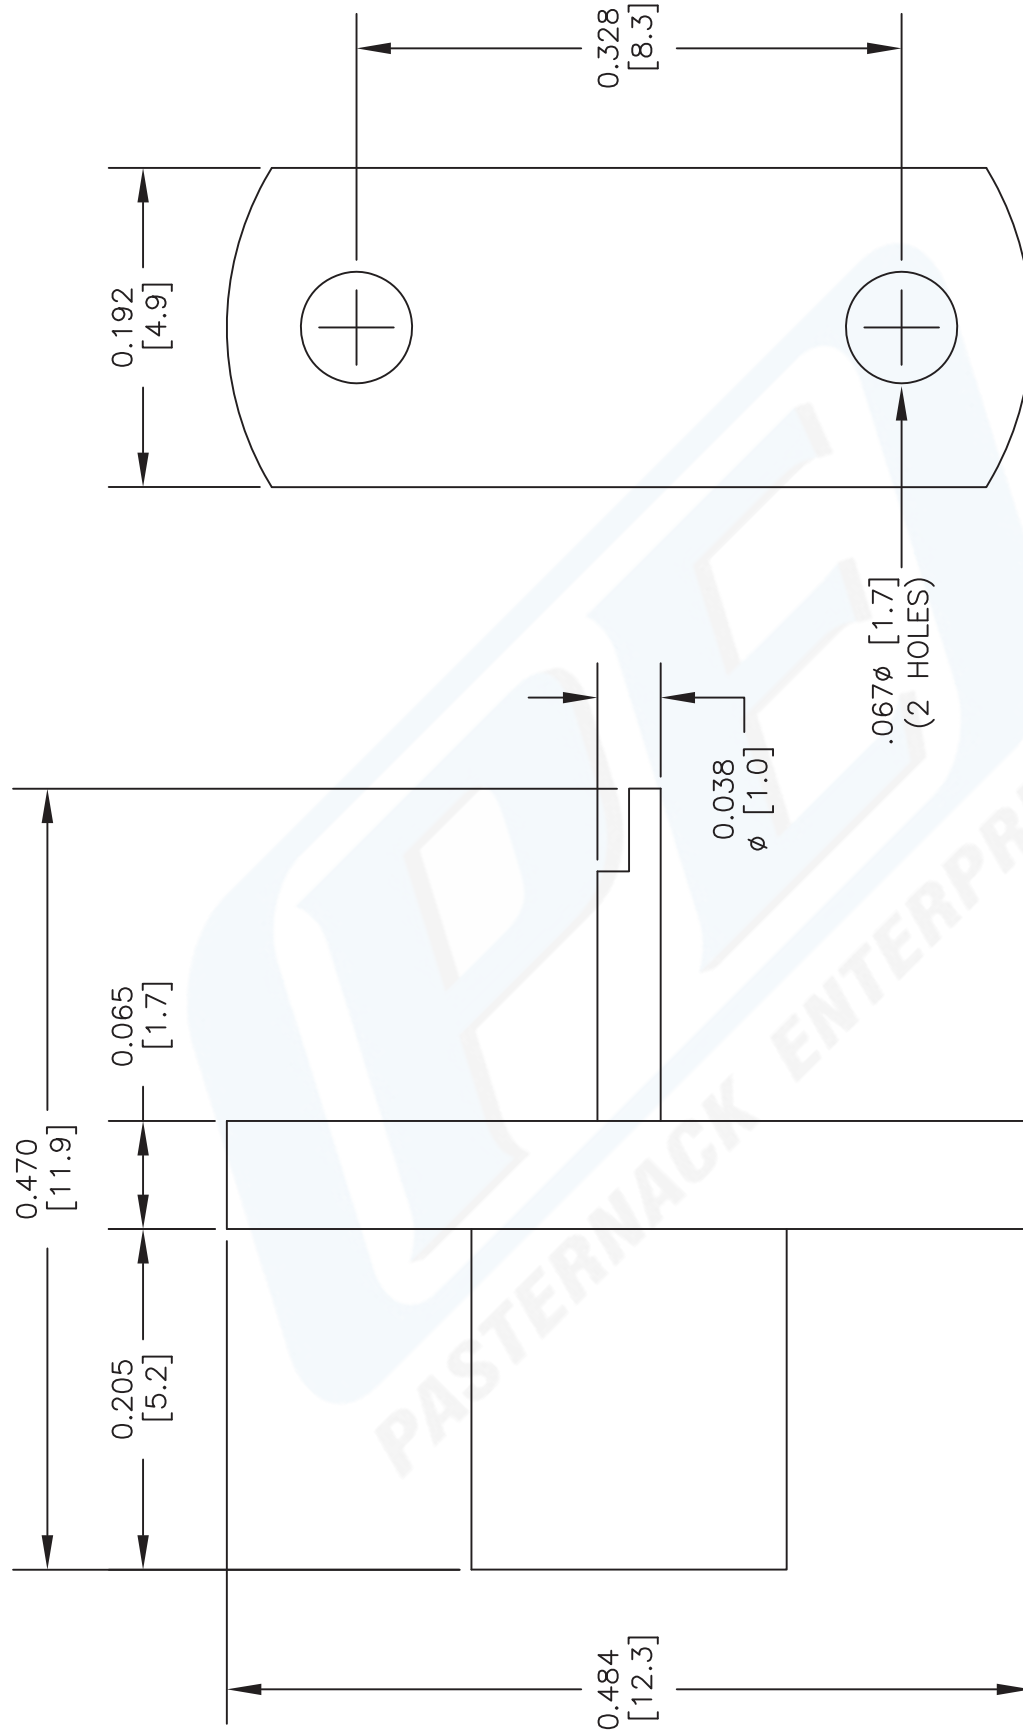

DWG TITLE

PE4891

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

FSCM NO. 53919

CAD FILE 061202

SCALE N/A

SIZE A

127

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com