

# RT2-S20D1WR

## SMD-DIP 8 Package

- Operating temperature range: -40°C to +105°C
- High efficiency up to 84%
- Miniature SMD package
- Isolation voltage: 1.5KVDC
- Internal surface mounted design
- No external component required
- International standard pin-out

RoHS



RT2-S20D1WR series are specially designed for applications where an isolated voltage is required in a distributed power supply system.

They are suitable for:

1. Where the voltage of the input power supply is stable (voltage variation:  $\pm 10\%$ Vin);
2. Where isolation between input and output is necessary (isolation voltage  $\leq 1500$ VDC);
3. Where the output voltage regulation and the ripple & noise of the output voltage is not strictly required;
4. Typical application: preceding-stage interference isolation condition; ground-interference canceled condition; digit circuit condition; Voltage-isolation converting condition; normal low-frequency artificial circuit condition; relay drive circuit condition, etc.

### Selection Guide

Part No.	Input Voltage (VDC)	Output		Efficiency (% Min./Typ.) @ Full Load	Max. Capacitive Load ( $\mu$ F)
		Nominal (Range)	Output Voltage (VDC)		
RT2-0503S20D1WR	5 (4.5-5.5)	3.3	400/40	74/78	220
RT2-0505S20D1WR		5	400/40	75/79	
RT2-0509S20D1WR		9	222/22	78/82	
RT2-0512S20D1WR		12	167/17	78/82	
RT2-0515S20D1WR		15	133/13	79/83	
RT2-1205S20D1WR	12 (10.8-13.2)	5	400/40	75/79	
RT2-1209S20D1WR		9	222/22	78/82	
RT2-1212S20D1WR		12	167/17	78/82	
RT2-1215S20D1WR		15	133/13	79/83	
RT2-1224S20D1WR		24	83/8	80/84	
RT2-1515S20D1WR	15 (13.5-16.5)	15	133/13	79/83	
RT2-2405S20D1WR	24 (21.6-26.4)	5	400/40	75/79	
RT2-2409S20D1WR		9	222/22	78/82	
RT2-2412S20D1WR		12	167/17	78/82	
RT2-2415S20D1WR		15	133/13	79/83	
RT2-2424S20D1WR		24	83/8	80/84	

### Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Current (full load / no-load)	5V input	--	506/30	--/60	mA	
	12V input	--	212/25	--/50		
	15V input	--	169/18	--/35		
	24V input	--	105/15	--/30		
Reflected Ripple Current		--	15	--	mA	
Surge Voltage (1sec. max.)	5V input	-0.7	--	9	VDC	
	12V input	-0.7	--	18		
	15V input	-0.7	--	21		
	24V input	-0.7	--	30		
Input Filter			Filter capacitor			
Hot Plug			Unavailable			

Output Specifications							
Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Output Voltage Accuracy					See tolerance envelope graph (Fig. 1)		
Line Regulation	Input voltage change: ±1%	3.3VDC output	--	--	±1.5	--	
		Other output	--	--	±1.2		
Load Regulation	10%-100% load	3.3VDC output	--	18	--	%	
		5VDC output	--	12	--		
Ripple & Noise*		9VDC output	--	9	--		
		12VDC output	--	8	--		
		15VDC output	--	7	--		
		24VDC output	--	6	--		
		24VDC output	--	100	200	mVp-p	
		Other output	--	100	150		
Temperature Coefficient	Full load		--	--	±0.03	%/°C	
Short Circuit Protection**			--	--	1	s	

Note: \* Ripple and noise are measured by parallel cable method, please see DC-DC Converter Application Notes for specific operation;

\*\* Supply voltage must be discontinued at the end of short circuit duration.


General Specifications						
Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA		1500	--	--	VDC
Isolation Resistance	Input-output, isolation voltage 500VDC		1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V		--	20	--	pF
Operating Temperature	5V output	Derating if the temperature e71°C, (see Fig. 2)	-40	--	105	°C
	Other output	Derating if the temperature e85°C, (see Fig. 2)				
Storage Temperature			-55	--	125	
Casing Temperature Rise	Ta=25°C, nominal input, full load output		--	25	--	
Pin Welding Resistance Temperature	Welding spot is 1.5mm away from the casing, 10 seconds		--	--	300	
Storage Humidity	Non-condensing		--	--	95	%RH
Reflow Soldering Temperature			Peak temp.≤245°C, maximum duration time≤60s at 217°C. For actual application, please refer to IPC/JEDEC J-STD-020D.1.			
Switching Frequency	Full load, nominal input voltage		--	100	--	KHz
MTBF	MIL-HDFK-217F@25°C		3500	--	--	K hours

Physical Specifications		
Casing Material	Epoxy resin (UL94-V0)	
Dimensions	12.70*11.20*7.25 mm	
Weight	1.6g(Typ.)	
Cooling Method	Free convection	

EMC Specifications		
EMI	RE	CISPR22/EN55022 CLASS B (see Fig. 4 for recommended circuit)
EMS	ESD	IEC/EN61000-4-2 Contact ±8KV perf. Criteria B

# RT2-S20D1WR

3.3VDC output

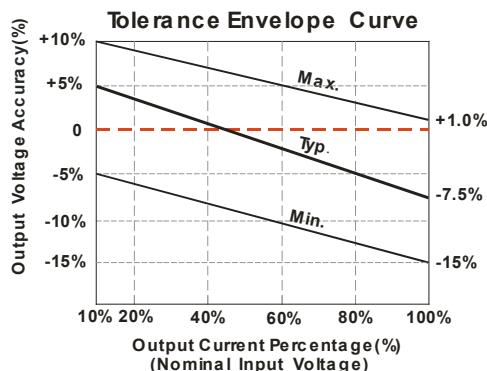

Other output

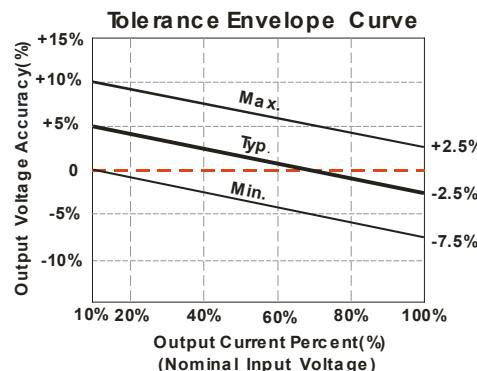


Fig. 1

Temperature Derating Curve



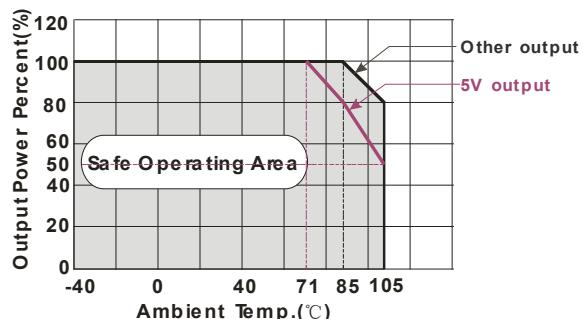


Fig. 2


Efficiency Vs Input Voltage (Full Load)

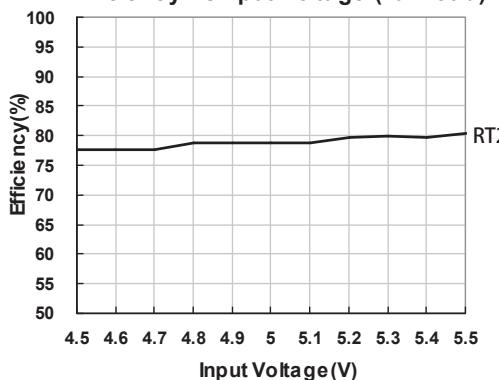


Efficiency Vs Output Load(Vin=5V)

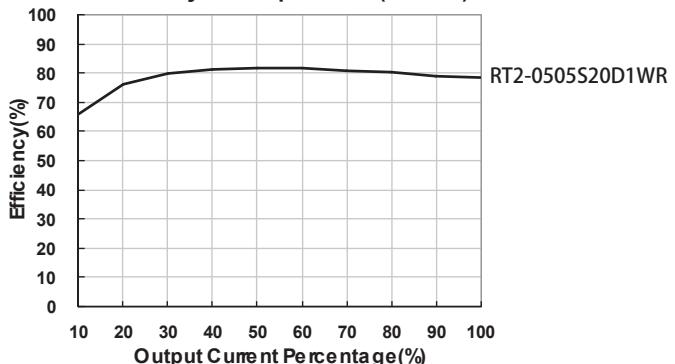

Efficiency Vs Input Voltage (Full Load)

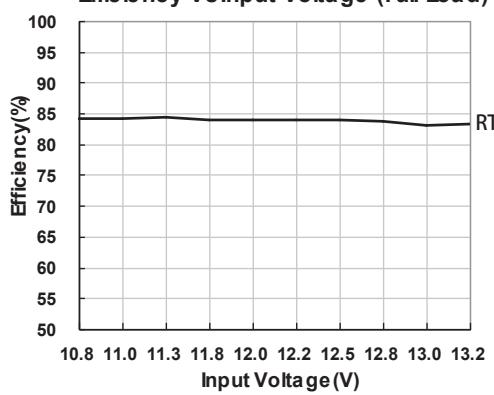

Efficiency Vs Output Load(Vin=12V)

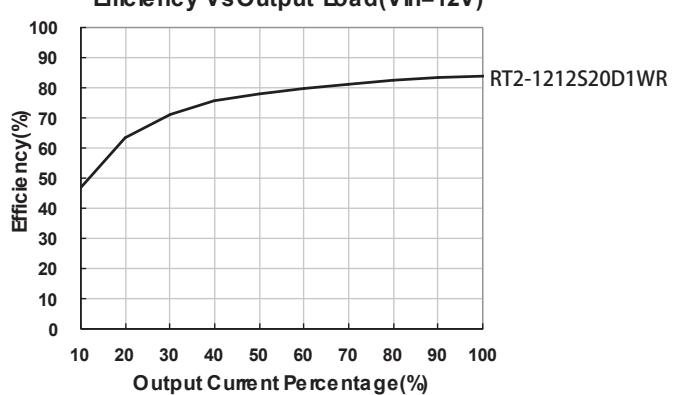

Design Reference

1. Typical application circuit

If it is required to further reduce input and output ripple, a filter capacitor may be connected to the input and output terminals, see Fig.3. Moreover, choosing a suitable filter capacitor is very important, start-up problems may be caused if the capacitance is too large. Under the condition of safe and reliable operation, the recommended capacitive load values are shown in Table 1.

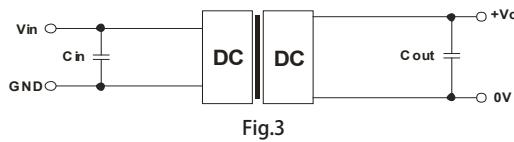


Fig.3

Recommended capacitive load value table (Table 1)

Vin(VDC)	Cin(µF)	Vo (VDC)	Cout(µF)
5	4.7	3.3	10
12	2.2	5	10
15	2.2	9	4.7
24	1	12	2.2
--	--	15	1
--	--	24	0.47

2. EMC solution-recommended circuit

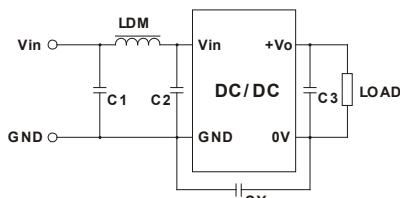


Fig.4

Input voltage (VDC)	5/12/15		24
	C1	C2	C3
EMI	4.7µF /50V	4.7µF /50V	Refer to the Cout in Fig.3
CY	--	1nF/2KV	1nF/2KV
LDM	6.8µH		


Notes: 1. 24V input series, 24V output series is subject to CY (CY : 1nF/2KV).

2. It is not needed to add the component in the peripheral circuit when parameter with the symbol of "--".

3. Output load requirements

When using, the minimum load of the module output should not be less than 10% of the nominal load. In order to meet the performance parameters of this datasheet, please connect a 10% dummy load in parallel at the output end, the dummy load is generally a resistor, Please note that the resistor needs to be used in derating.

Dimensions and Recommended Layout

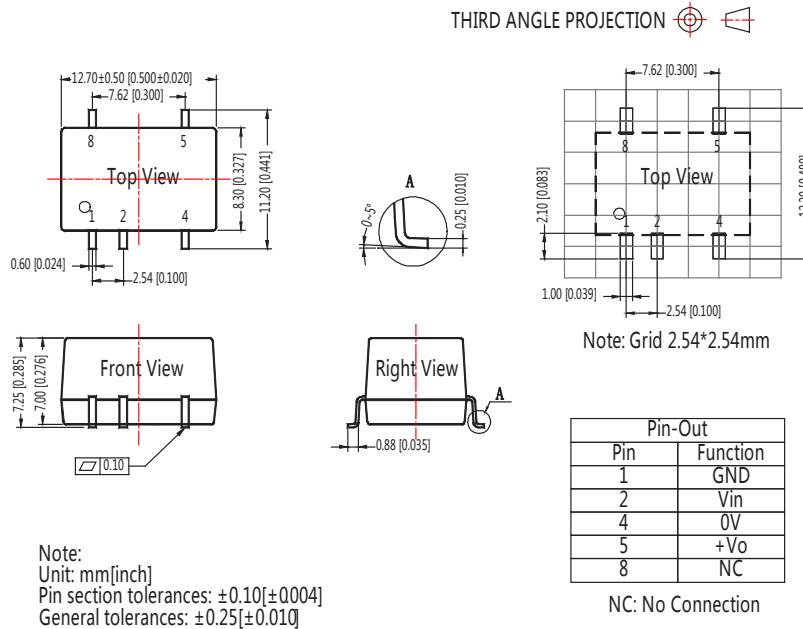

If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;

The maximum capacitive load offered were tested at nominal input voltage and full load;

Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% with nominal input voltage and rated output load;

All index testing methods in this datasheet are based on our Company's corporate standards;

The performance parameters of the product models listed in this manual are as above, but some parameters of non-standard model products may exceed the requirements mentioned above. Please contact our technicians directly for specific information;

We can provide product customization service;

Specifications are subject to change without prior notice.

*The models listed here are just standard type. If you need a product with special specification or you have questions regarding packing standards (Tube oder Tape/Reel) as well as application support, please contact our specialists: sales@rsg-electronic.de or +49 69-984047-41/-28*