

RF AMPLIFIER

MODEL *TM6515PM*

Available as: TM6515PM, 4 Pin TO-8 (T4)
 TN6515PM, 4 Pin Surface Mount (SM3)
 FP6515PM, 4 Pin Flatpack (FP4)
 BX6515PM, Connectorized Housing (H1)

Features

- Medium Gain: +12.5 dB Typical
- Output Power: +16.5 dBm Typical
- Operating Temp. -55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 500 MHz	5 - 500 MHz
Gain (dB)	12.5	11.0 Min.
Power @ 1 dB Comp. (dBm)	+16.5	+15.0 Min.
Reverse Isolation (dB)	-16	-15 Max.
VSWR In	<1.5:1	2.0:1 Max.
VSWR Out	<1.5:1	2.0:1 Max.
Noise Figure (dB)	4.5	5.5 Max.
Power Vdc	+15	+15
mA	50	55 Max.

Note: Care should always be taken to effectively ground the case of each unit.

Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +50 dBm (Typ.)
 Second Order Two Tone Intercept Point +43 dBm (Typ.)
 Third Order Two Tone Intercept Point +31 dBm (Typ.)


Maximum Ratings

Ambient Operating Temperature -55°C to +100 °C
 Storage Temperature -62°C to +125 °C
 Case Temperature +125 °C
 DC Voltage +18 Volts
 Continuous RF Input Power +13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Guaranteed Phase Noise Performance (dBc/Hz)

Frequency	Typical	Guarantee
100 Hz	-160	-156
1 kHz	-170	-166
10 kHz	-172	-168
100 kHz	-174	-170
1 MHz	-174	-170

Typical Performance Data

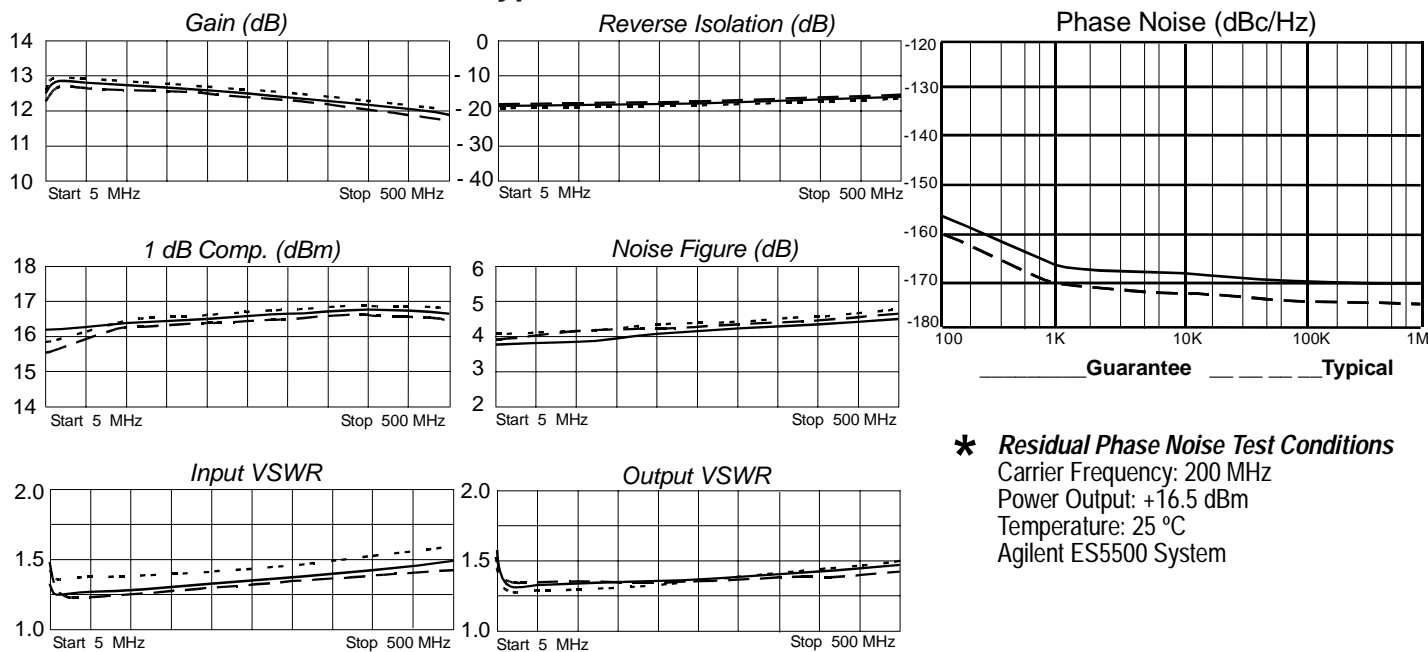

* **Residual Phase Noise Test Conditions**
 Carrier Frequency: 200 MHz
 Power Output: +16.5 dBm
 Temperature: 25 °C
 Agilent ES5500 System

Legend ——— +25 °C - - - +85 °C ····· -55 °C



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 3/31/04

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001