



1. Mechanical Dimensions:

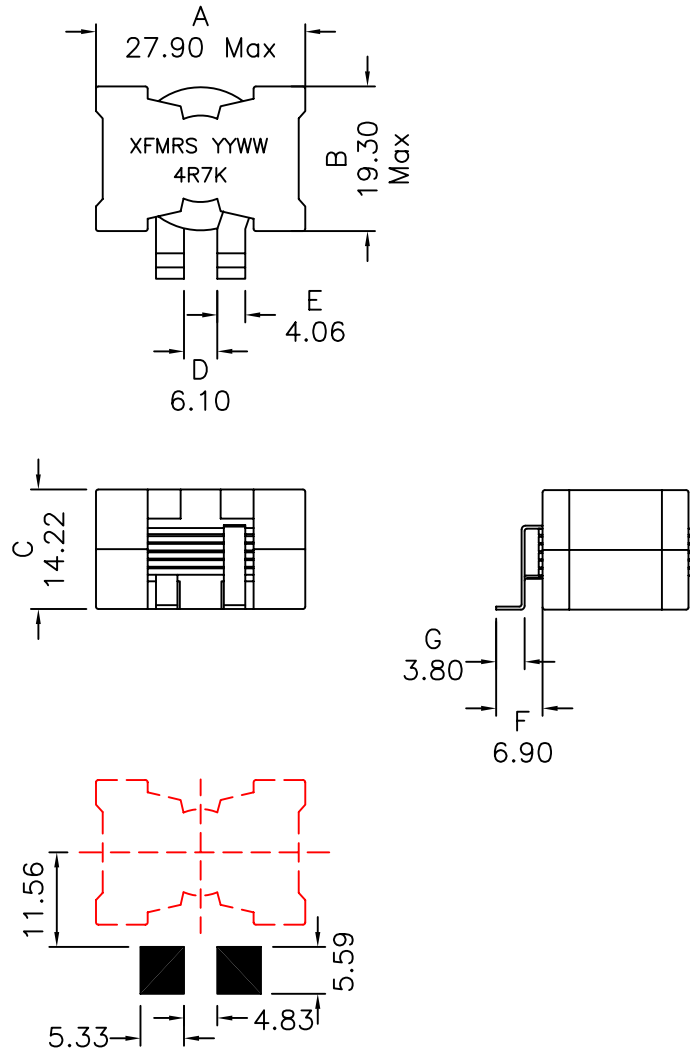

Recommended Land Patten

2. Schematic:



3. Electrical Specifications:

OCL: $4.7\mu\text{H} \pm 10\%$ @500KHz 0.1V

DCR: 1.62mOhms Max

Isat: 33Adc (Based on 10% Typ Drop in OCL)

36.9Adc (Based on 20% Typ Drop in OCL)

39.0Adc (Based on 30% Typ Drop in OCL)

Irms: 30A (Based on 40°C Temp Rise)

SRF: 30MHz Typ

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: $\pm 0.004"$ (0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

XFMRS Inc www.XFMRS.com		Title: SMT Power Inductors	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ± 0.25 Dimensions in MM	P/N: XFHCL2814L-4R7K	REV. A	
	DWN.	Xiany	Jun-25-09
SHEET 1 OF 1	CHK.	YK Liao	Jun-25-09
	APP.	BW	Jun-25-09

DOC REV: A/1

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.