
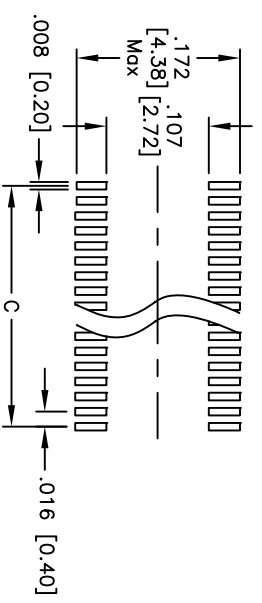
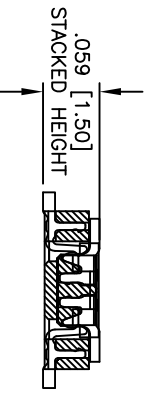
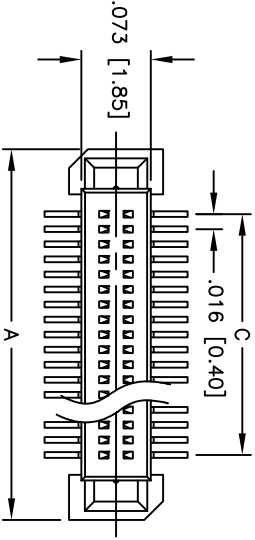
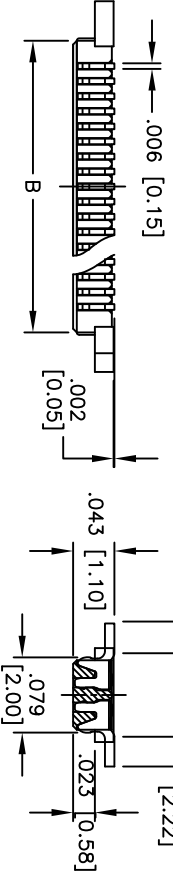


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	

APPROVED: _____
 DATE: _____ TITLE: _____

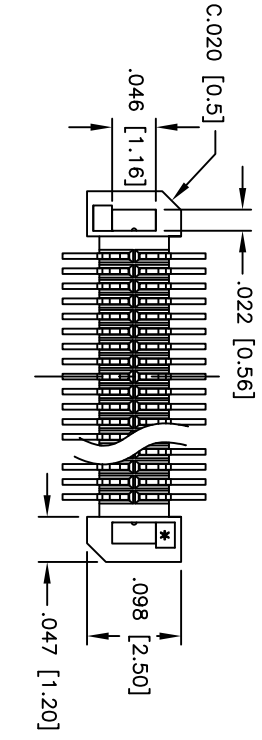

RECOMMENDED PCB LAYOUT
(TOP VIEW)

PACKAGED ON TAPE & REEL

SPECIFICATIONS:
 Material: HI-Temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Phosphor Bronze
 Plating:
 Gold over Nickel underplate overall

Electrical:
 Current rating: 0.3 Amps.
 Contact resistance: 90 mohms max. @ AC 1mA.
 Insulation resistance: 100 Mohms min. @ DC 100V
 Dielectric withstanding voltage: 100 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM
 TOLERANCES: EXCEPT AS NOTED
 INCHES
 .X ± .10 ØX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX ± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .016 [0.40] BOARD TO BOARD MALE PLUG
 SURFACE MOUNT

APPROVALS	DATE	SIZE	PART NO.	REV.
DRAWN	DY	11/30/10	BB4-PO-XXX-G-1.00-NP-T/R	-
CHECKED				
APPROVED				