



VRLA Rechargeable Battery

BPS7-12



FEATURES

- Maintenance Free (topping up not needed)
- Non - spillable (no free electrolyte)
- Low Self Discharge, less than 3% per month
- both Vertical & Horizontal installations

APPLICATIONS

- UPS
- Security Systems
- Medical Equipment
- Laboratory Equipment
- Power Packs
- Emergency Lighting
- R/C Cars & Planes



SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	7.00Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	2540g(5.60lbs.)
Terminals	T2 (Faston Tab 250) T1 is optional
Internal Resistance	$\leq 25m\Omega$ (Fully Charged)
Max. Discharge Current	105 A (5 sec.)
Max. Charge Current	2.1 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage : -20°C~40°C(-4°F~104°F)
Container Material	Standard: ABS(UL 94-HB) BPS7-12 Optional: Flame Retardant ABS(UL 94-V0) BPS7-12FR



MH19884



- IEC 61056-1
- JIS C 8702-1
- GB/T 19639.1
- VdS G100077

DIMENSION(mm/inch)

OUTER DIMENSIONS

TERMINAL TYPE

Length

151±1.5 (5.94±0.06)

Width


65±1.5 (2.56±0.06)

Container Height


93±1.5 (3.66±0.06)

Total Height


98±2.0 (3.86±0.08)

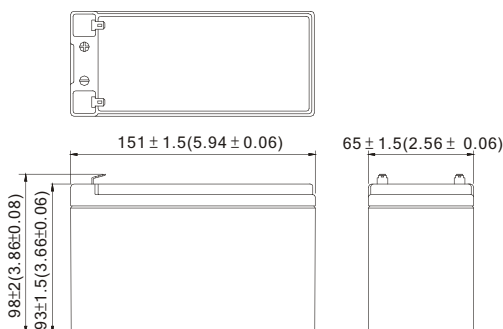

Terminal T1



Terminal T2



Constant power discharge characteristics at 25 °C/77 °F

Unit: W

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	253	186	149	88.8	50.9	20.40	14.07	7.86	4.14
1.75V	293	202	156	92.2	52.5	20.81	14.28	7.98	4.20
1.70V	311	209	161	94.3	53.4	21.00	14.36	8.02	4.22
1.65V	325	214	165	95.6	54.1	21.15	14.41	8.04	4.24
1.60V	336	218	168	96.6	54.6	21.27	14.45	8.04	4.24

Constant current discharge characteristics at 25 °C/77 °F

Unit: A

Discharge Time F.V. (V/cell)	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	22.8	16.4	13.0	7.53	4.28	1.70	1.172	0.655	0.345
1.75V	26.9	17.8	13.6	7.81	4.41	1.73	1.190	0.665	0.350
1.70V	28.6	18.4	14.0	7.99	4.49	1.75	1.196	0.668	0.352
1.65V	29.8	18.8	14.3	8.11	4.54	1.76	1.201	0.670	0.353
1.60V	30.8	19.2	14.6	8.19	4.59	1.77	1.204	0.670	0.353

All data and artworks shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.

For operation, please refer to the instruction from technical manual.

A/3 REV. May. 2016

Powered by B.B. Battery Co., Ltd.