




# LLZ5221B – LLZ5263B

## 500mW Hermetically Sealed Glass Zener Voltage Regulators

### MINI MELF

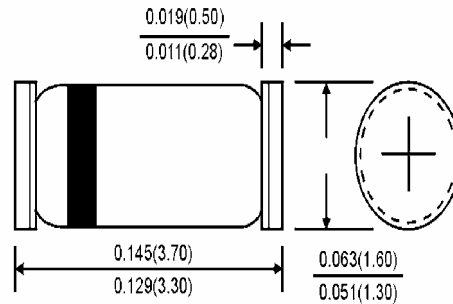

### Features

- ✧ Zener voltage range 2.4 to 56 volts
- ✧ Mini-MELF package
- ✧ Surface device type mounting
- ✧ Hermetically sealed glass
- ✧ Compression bonded construction
- ✧ All external surfaces are corrosion resistant and leads are readily solderable
- ✧ RoHS compliant
- ✧ Matte Tin (Sn) lead finish
- ✧ Color band indicates negative polarity

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Type Number	Symbol	Value	Units
Power Dissipation	P <sub>d</sub>	500	mW
Maximum Forward Voltage @ I <sub>F</sub> =200mA	V <sub>F</sub>	1.1	V
Storage Temperature Range	T <sub>STG</sub>	-65 to + 200	°C
Operating Junction Temperature	T <sub>J</sub>	+ 200	°C

Version: A07

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Device	V <sub>Z</sub> @ I <sub>ZT</sub> (Volts) Nom	I <sub>ZT</sub> mA	Z <sub>ZT</sub> @ I <sub>ZT</sub> Ω Max	Z <sub>ZK</sub> @ I <sub>ZK</sub> = 0.25mA Ω Max	I <sub>R</sub> @ V <sub>R</sub> (uA) Max	V <sub>R</sub> Volts
LLZ5221B	2.4	20	30	1200	100	1.0
LLZ5222B	2.5	20	30	1250	100	1.0
LLZ5223B	2.7	20	30	1300	75	1.0
LLZ5224B	2.8	20	30	1400	75	1.0
LLZ5225B	3.0	20	30	1600	50	1.0
LLZ5226B	3.3	20	28	1600	25	1.0
LLZ5227B	3.6	20	24	1700	15	1.0
LLZ5228B	3.9	20	23	1900	10	1.0
LLZ5229B	4.3	20	22	2000	5.0	1.0
LLZ5230B	4.7	20	19	1900	5.0	2.0
LLZ5231B	5.1	20	17	1600	5.0	2.0
LLZ5232B	5.6	20	11	1600	5.0	3.0
LLZ5233B	6.0	20	7	16900	5.0	3.5
LLZ5234B	6.2	20	7	1000	5.0	4.0
LLZ5235B	6.8	20	5	750	3.0	5.0
LLZ5236B	7.5	20	6	500	3.0	6.0
LLZ5237B	8.2	20	8	500	3.0	6.5
LLZ5238B	8.7	20	8	600	3.0	6.5
LLZ5239B	9.1	20	10	600	3.0	7.0
LLZ5240B	10	20	17	600	3.0	8.0
LLZ5241B	11	20	22	600	2.0	8.4
LLZ5242B	12	20	30	600	1.0	9.1
LLZ5243B	13	9.5	13	600	0.5	9.9
LLZ5244B	14	9.0	15	600	0.1	10
LLZ5245B	15	8.5	16	600	0.1	11
LLZ5246B	16	7.8	17	600	0.1	12
LLZ5247B	16	7.4	19	600	0.1	13
LLZ5248B	18	7.0	21	600	0.1	14
LLZ5249B	19	6.6	23	600	0.1	14

Version: A07

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Device	V <sub>Z</sub> @ I <sub>ZT</sub> (Volts) Nom	I <sub>ZT</sub> mA	Z <sub>ZT</sub> @ I <sub>ZT</sub> Ω Max	Z <sub>ZK</sub> @ I <sub>ZK</sub> = 0.25mA Ω Max	I <sub>R</sub> @ V <sub>R</sub> (uA) Max	V <sub>R</sub> Volts
LLZ5250B	20	6.2	25	600	0.1	15
LLZ5251B	22	5.6	29	600	0.1	17
LLZ5252B	24	5.2	33	600	0.1	18
LLZ5253B	25	5.0	35	600	0.1	19
LLZ5254B	27	5.0	41	600	0.1	21
LLZ5255B	28	4.5	44	600	0.1	21
LLZ5256B	30	4.2	49	600	0.1	23
LLZ5157B	33	3.8	58	700	0.1	25
LLZ5258B	36	3.4	70	700	0.1	27
LLZ5259B	39	3.2	80	800	0.1	30
LLZ5260B	43	3.0	93	900	0.1	33
LLZ5261B	47	2.7	105	1000	0.1	36
LLZ5262B	51	2.5	125	1100	0.1	39
LLZ5263B	56	2.2	150	1300	0.1	43

- Notes:
1. The type numbers listed have zener voltage as shown and have a standard tolerance on the nominal zener voltage of  $\pm 5\%$  in Blue marking, suffix A= $\pm 10\%$  in Orange marking and D= $\pm 1\%$  in Yellow marking.
  2. For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances.
  3. The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I<sub>ZT</sub> or I<sub>ZK</sub>) is superimposed to I<sub>ZT</sub> or I<sub>ZK</sub>.

Version: A07