

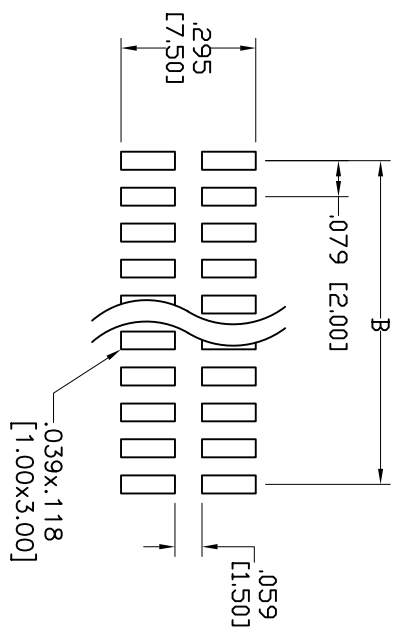


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/5/03	

APPROVED: _____
 DATE: _____ TITLE: _____

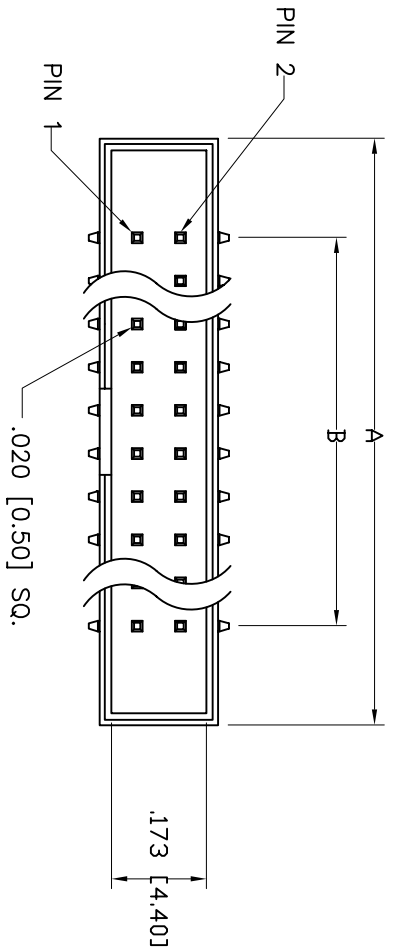

PCB LAYOUT

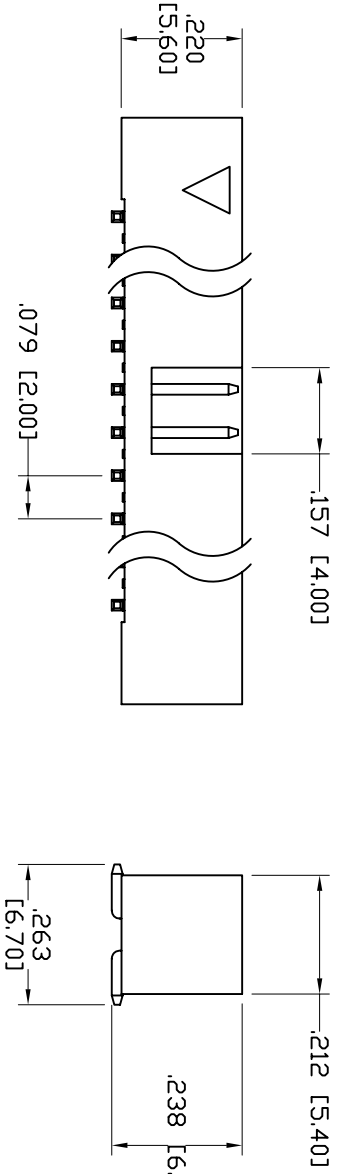

SPECIFICATIONS:
 Material: Insulator: Hi-Temp Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold
 Flash over Nickel underplate overall
 Electrical:
 Operating voltage: 250 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

A = .079 [2.00] X No. of Spaces + .362 [9.20]
 B = .079 [2.00] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010

DRAWN	SLS	11/5/03
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-0214

TITLE: 2.0 MM BOX HEADER, VERTICAL, GOLD FLASH, SURFACE MOUNT

SIZE: X PART NO.: 2BHR-XX-VUA-SMT

SCALE: NTS SHEET 1 OF 1

6 5 4 3 2 1



6 5 4 3 2 1