

Multilayer Ceramic Chip Capacitors

C2012X8R1H683M125AE









TDK item description C2012X8R1H683MT***S

Applications	Commercial Grade Please refer to Part No. CGA4J2X8R1H683M125AE for Automotive use.	
Feature	150°C High Temperature Application Soft Soft Termination	
Series	C2012 [EIA 0805]	
Status	Production (Not Recommended for New Design)	



	Size
Length(L)	2.00mm +0.45,-0.20mm
Width(W)	1.25mm +0.25,-0.20mm
Thickness(T)	1.25mm +0.25,-0.20mm
Terminal Width(B)	0.20mm Min.
Terminal Spacing(G)	0.50mm Min.
Recommended Land Pattern (PA)	1.00mm to 1.30mm(Flow Soldering)
Neconimented Land Fattern (FA)	0.90mm to 1.20mm(Reflow Soldering)
Recommended Land Pattern (PB)	1.00mm to 1.20mm(Flow Soldering)
Neconimended Land Fattern (FB)	0.70mm to 0.90mm(Reflow Soldering)
Recommended Land Pattern (PC)	0.80mm to 1.10mm(Flow Soldering)
necommended Land Fattern (FC)	0.90mm to 1.20mm(Reflow Soldering)

Electrical Characteristics			
Capacitance	68nF ±20%		
Rated Voltage	50VDC		
Temperature Characteristic	X8R(±15%)		
Dissipation Factor (Max.)	3%		
Insulation Resistance (Min.)	7352ΜΩ		

Other		
Coldaring Mathod	Wave (Flow)	
Soldering Method	Reflow	
AEC-Q200	No	
Packing	Blister (Plastic)Taping [180mm Reel]	
Package Quantity	2000pcs	

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

C2012X8R1H683M125AE














Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

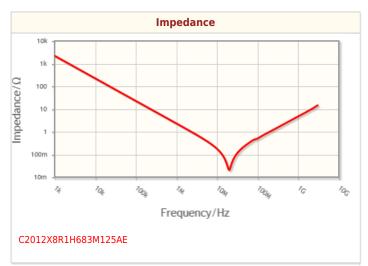


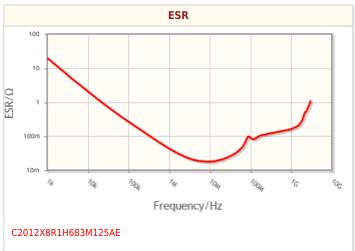

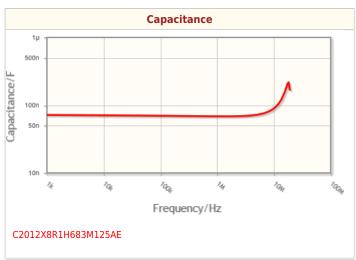

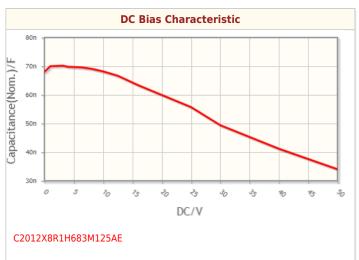

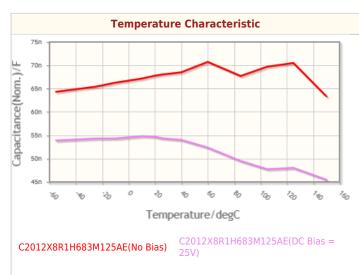

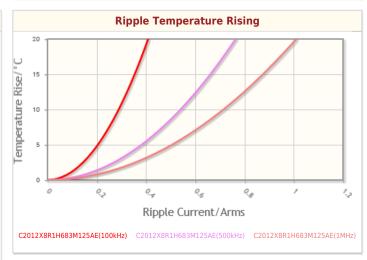

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

C2012X8R1H683M125AE










Associated Images



[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.