

# GPTN3084

## PHASE CONTROLLED SCR

High reliability operation  
 DC power supply  
 AC drives

<b>VOLTAGE UP TO</b>	<b>2400 V</b>
<b>AVERAGE CURRENT</b>	<b>840 A</b>
<b>SURGE CURRENT</b>	<b>11 kA</b>

### BLOCKING CHARACTERISTICS

Characteristic		Conditions	Value
VRRM	Repetitive peak reverse voltage		2400 V
VRSM	Non-repetitive peak reverse voltage		2500 V
VDRM	Repetitive peak off-state voltage		2400 V
IDRM	Repetitive peak off-state current, max.	VDRM, single phase, half wave, Tj = Tjmax	50 mA
IRRM	Repetitive peak reverse current, max.	VRRM, single phase, half wave, Tj = Tjmax	50 mA

### ON-STATE CHARACTERISTICS

IT(AV)	Average on-state current	Sine wave, 180° conduction, Th = 55 °C	840 A
IT(RMS)	R.M.S. on-state current	Sine wave, 180° conduction, Th = 55 °C	1319 A
ITSM	Surge on-state current	Non rep. half sine wave, 50 Hz, VR = 0 V, Tj = Tjmax	11 kA
I²t	I² t for fusing coordination		605 kA²s
VT(TO)	Threshold voltage	Tj = Tjmax	1.10 V
rT	On-state slope resistance	Tj = Tjmax	0.552 mΩ
VTM	Peak on-state voltage, max	On-state current IT = 2000 A, Tj = Tjmax	2.20 V
IH	Holding current, max	Tj = 25 °C	300 mA
IL	Latching current, typ	Tj = 25 °C	700 mA

### TRIGGERING CHARACTERISTICS

VGT	Gate trigger voltage	Tj = 25 °C, VD = 5 V	3.5 V
IGT	Gate trigger current	Tj = 25 °C, VD = 5 V	250 mA
VGD	Non-trigger voltage	VD = 67% VRRM, Tj = Tjmax	0.3 V
PGM	Peak gate power dissipation	Pulse width 1 ms	150 W
PG(AV)	Average gate power dissipation		2 W
IFGM	Peak gate current		10 A
VFGM	Peak gate voltage (forward)		30 V
VRGM	Peak gate voltage (reverse)		5 V


### SWITCHING CHARACTERISTICS

di/dt	Critical rate of rise of on-state current	Non rep. - Tj = Tjmax	200 A/μs
dV/dt	Critical rate of rise of off-state voltage	Tj = Tjmax	1000 V/μs
tq	Turn-off time, typ	Tj = Tjmax, IT = 2000 A, di/dt = -5 A/μs VR = 200 V, VD = 67% VDRM, dV/dt = 20 V/μs	μs


### THERMAL AND MECHANICAL CHARACTERISTICS

Rth(j-c)	Thermal resistance (junction to case)	Double side cooled	0.03 °C/W
Rth(c-h)	Thermal resistance (case to heatsink)	Double side cooled	0.007 °C/W
Tjmax	Max operating junction temperature		125 °C
Tstg	Storage temperature		-40 / 125 °C
F	Clamping force ± 5%		12 kN
	Mass		300 g


**Current rating - sine wave**

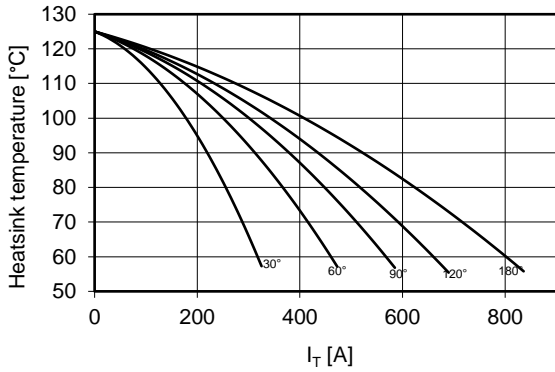


**Power loss - sine wave**

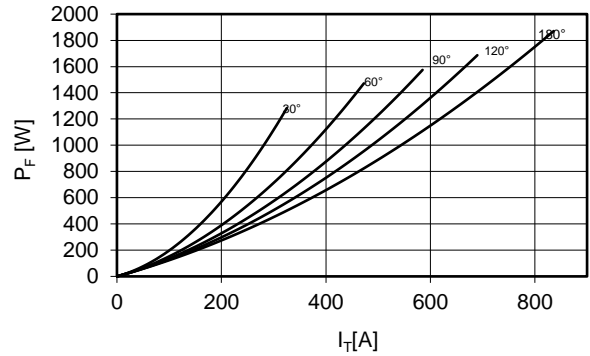




**Maximum surge current d.s. cooled**

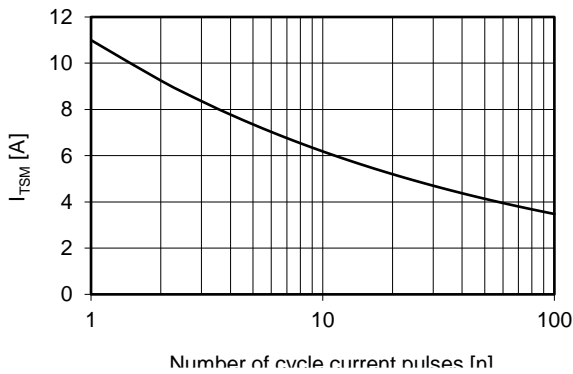

**On-state voltage drop**

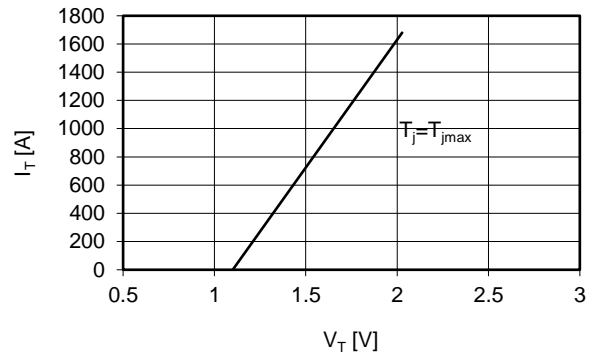

**Thermal impedance (j-c)**

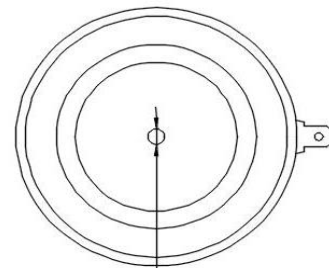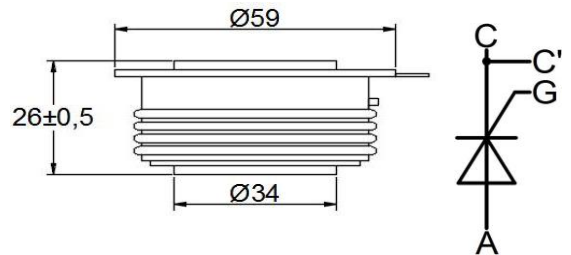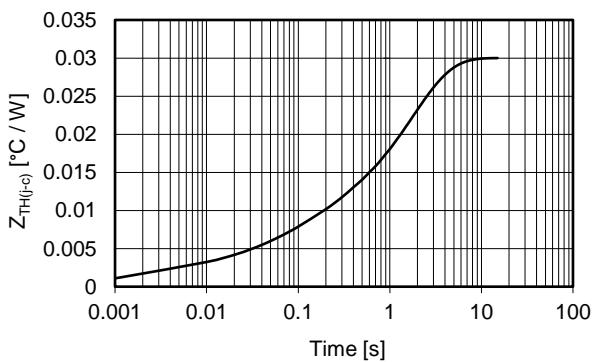

$\text{Ø}3,5 \pm 0,2 \times 4 \pm 0,2$   
Both sides

dimensions mm

**Ordering information GPTN3084-VVGL**

- VV**: blocking voltage / 100 (e.g. 24 for 2400 V)
- G**: trigger lead type (**S** = straight **T** = twisted **blank** = no leads)
- L**: trigger lead length x 100mm (**3 - 4 - 5 - 7 blank** = no leads)

In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.