




TOP VIEW





SIDE VIEW

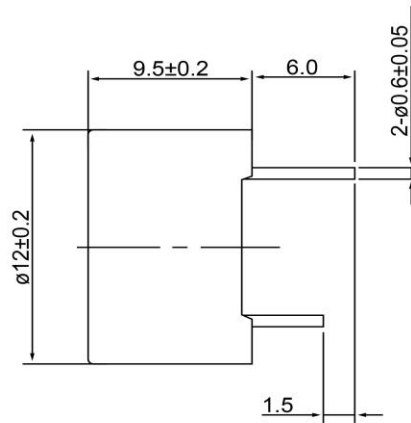

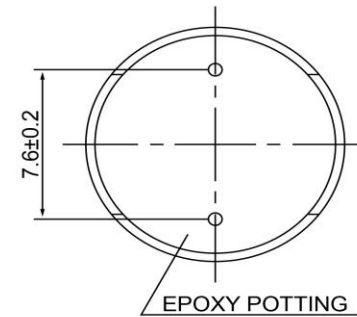BOTTOM VIEW



Specifications			Notes	Revision History							
Description	Value	Unit		Version	Description	Date	Approved				
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering	10/21/2013	J.S				
Resonant Frequency	2,300	(Hz)									
Rated Voltage	3	(V)									
SPL @ 10cm	85	(dBA)									
Tone	Single										
Mount Type	Thru Hole										
Voltage Range	2 ~ 5	(V)									
Max Rated Current	30	(mA)									
Housing Material	NORYL										
Operating Temperature	-30 ~ +70	°C									
Storage Temperature	-40 ~ +85	°C									
Weight	2	(g)									
						<b>Drawn by</b> A.B.	<b>Date</b> 10/21/2013	<b>Checked by</b> C.E.	<b>Date</b> 10/21/2013	<b>Approved by</b> J.S	<b>Date</b> 10/21/2013
						<b>Electro-Mechanical Indicator</b>			<b>IE122303-1</b>		