


MLZ2012N1R5LT000









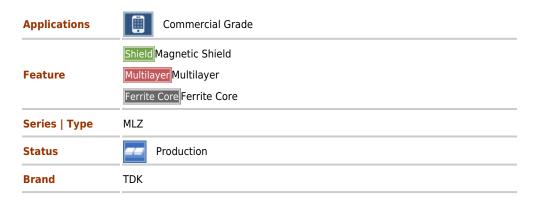



Size	
Length(L)	2.00mm ±0.20mm
Width(W)	1.25mm ±0.20mm
Thickness(T)	0.85mm ±0.20mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.20mm Nom.

Electrical Characteristics		
Inductance	$1.5 \mu H \pm 20\%$ at $2 MHz$	
Rated Current (L Change) [Typ.]		
Rated Current (L Change) [Max.]	190mA (50% Down)	
Rated Current (Temperature Rise) [Typ.]	900mA (20°C Rise)	
Rated Current (Temperature Rise) [Max.]	190mA (20°C Rise)	
DC Resistance [Typ.]	100mΩ	
DC Resistance [Max.]	130mΩ	
Self Resonant Frequency [Min.]		
Self Resonant Frequency [Typ.]		
Q [Min.]		
Q [Typ.]		

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C
Soldering Method	Wave (Flow)
	Reflow
	Iron Soldering
AEC-Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	4000pcs
What are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.	0.01g

MLZ2012N1R5LT000














Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

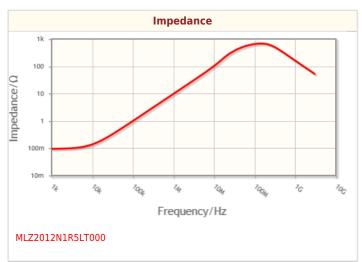

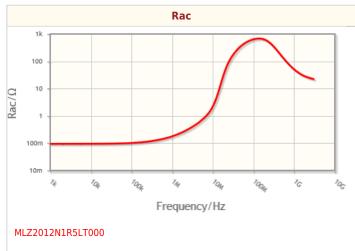

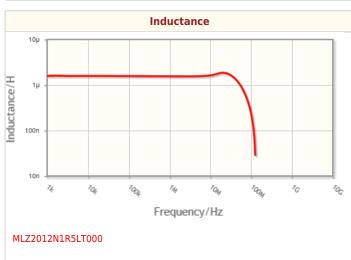

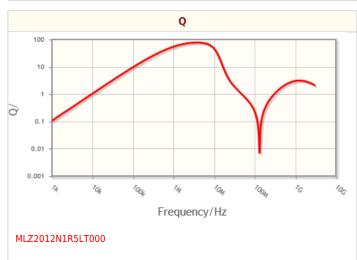

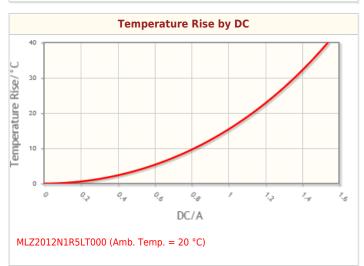

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

MLZ2012N1R5LT000










Associated Images



[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.