



Applications	Commercial Grade	
Feature	Shield Magnetic Shield Multilayer Ferrite Core Ferrite Core	X
Series Type	MLZ	
Status Brand	Production TDK	
Drand	IDA	

	Size
Length(L)	2.00mm ±0.20mm
Width(W)	1.25mm ±0.20mm
Thickness(T)	0.85mm ±0.20mm
Recommended Land Pattern (A)	0.80mm Nom.
Recommended Land Pattern (B)	1.00mm Nom.
Recommended Land Pattern (C)	1.20mm Nom.

Electrical Characteristics				
Inductance	$2.2 \mu H$ ±20% at 2MHz			
Rated Current (L Change) [Typ.]				
Rated Current (L Change) [Max.]	170mA (50% Down)			
Rated Current (Temperature Rise) [Typ.]	800mA (20°C Rise)			
Rated Current (Temperature Rise) [Max.]	170mA (20°C Rise)			
DC Resistance [Typ.]	120mΩ			
DC Resistance [Max.]	156mΩ			
Self Resonant Frequency [Min.]				
Self Resonant Frequency [Typ.]				
Q [Min.]				
Q [Typ.]				

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-55 to 125°C	
	Wave (Flow)	
Soldering Method	Reflow	
	Iron Soldering	
AEC-Q200	No	
Packing	Punched (Paper)Taping [180mm Reel]	
Package Quantity	4000pcs	
Wranner are for reference only and show exemplary products. I This PDF document was created based on the data listed on the TDK Corporation website.	0.01g	


! All specifications are subject to change without notice.

Copyright(c) TDK Corporation. All rights reserved.




MLZ2012N2R2LT000




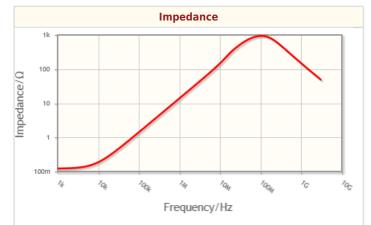


Rac 1k 100 Rac/Ω 10 1 100m 74 ⁷04 ⁷04 74 IQ4 ζÇ 'n 1q. Frequency/Hz

MLZ2012N2R2LT000

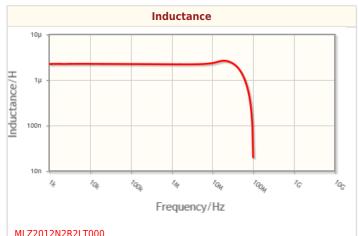

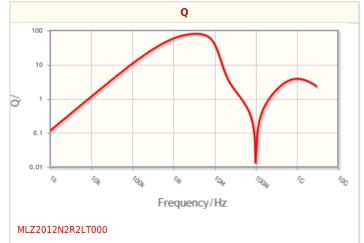

MLZ2012N2R2LT000

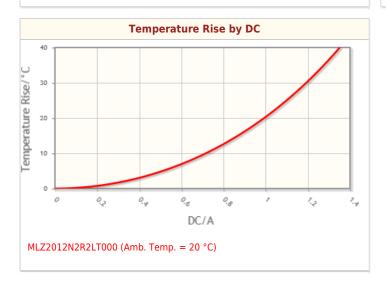

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Copyright(c) TDK Corporation. All rights reserved.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)


MLZ2012N2R2LT000



MLZ2012N2R2LT000



Associated Images



! Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.