
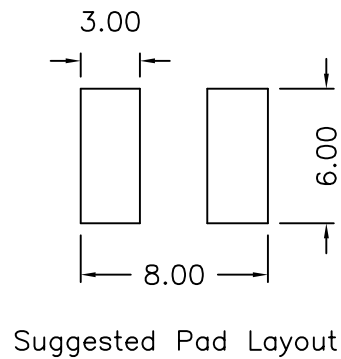
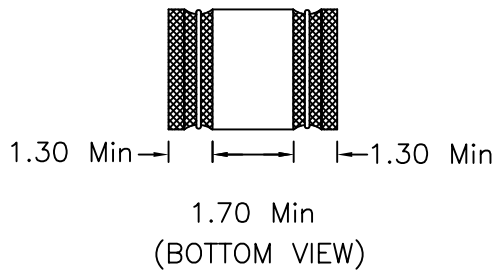



1. Mechanical Dimensions:



Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: $\pm 0.004'' (0.102\text{mm})$
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

DOC. REV. A/2

2. Schematic:



3. Electrical Specifications: @25°C

INDUCTANCE: $2.2\mu\text{H} \pm 20\%$ @1MHz 0.1V

Rated Current: 3200mA Max

DC RESISTANCE: $0.029 \pm 40\%$ OHMS

SRF: 80 MHz Min

XFMRS Inc www.XFMRS.com UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A Dimensions in MM SHEET 1 OF 1	Title: INDUCTOR		
	P/N: XFWI575047-2R2M	REV. A	
	DWN.	廖玉坤	May-11-11
	CHK.	李清儿	May-11-11
	APP.	BW	May-11-11

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.