

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION





© COPYRIGHT - By - TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC
HBDIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
F		REMOVED THE RIB ON THE BASE TO CASE ECO-15-011310	04DEC2015	HYS	CHL

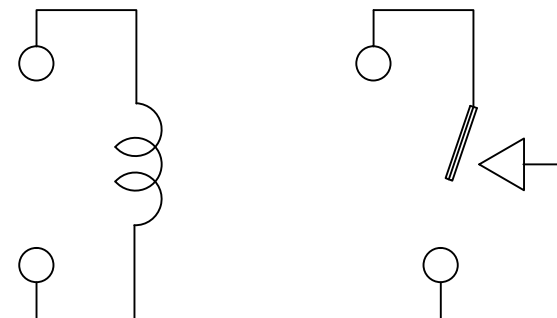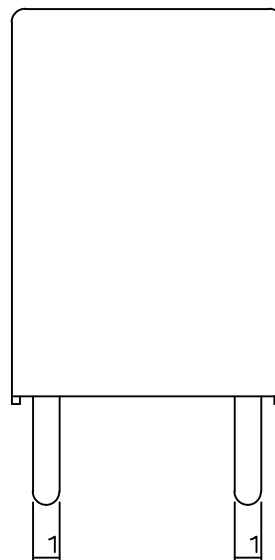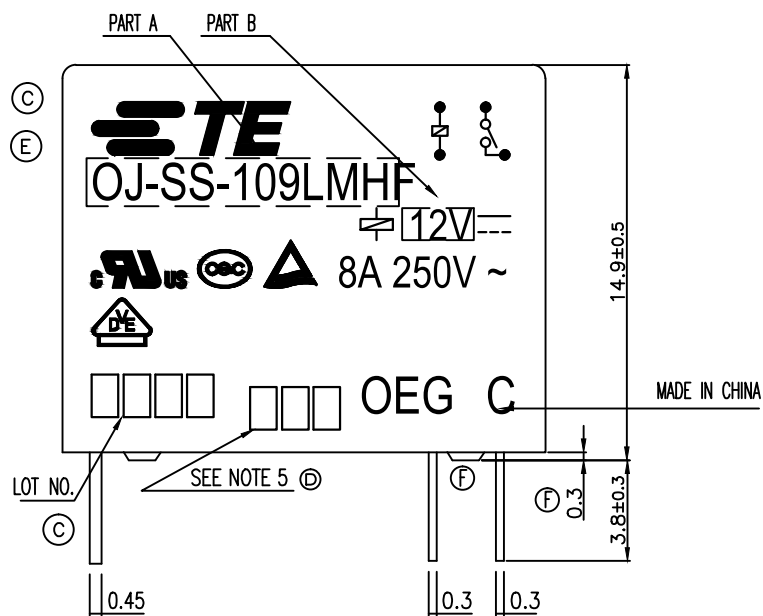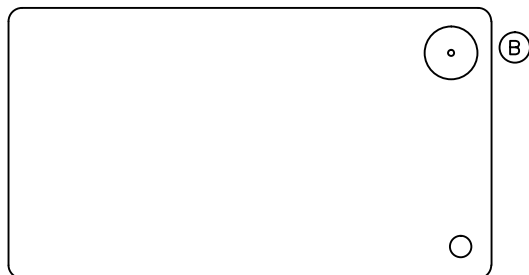

CONNECTION FIGURE

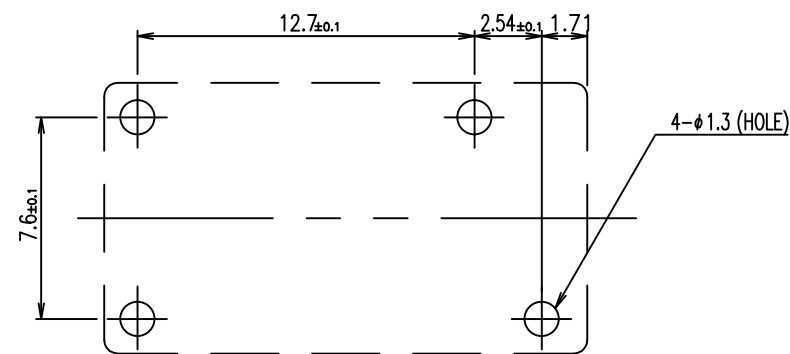
FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING
(BOTTOM VIEW)

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H.SASAKI

CHK N.FUNAYAMA

APVD A.NAGAI

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

OJ-LMH STANDARD CUSTOMER DRAWING

SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 00779 C= 1721083

SCALE 5:1 SHEET 1 OF 2 REV F

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , -

© COPYRIGHT - By - TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

HB

-

P

LTR

DESCRIPTION

DATE

DWN

APVD

-

SEE SHEET 1

-

-

-

① ③	OBSOLETE	1721083-6	OJ-SS-118LMHF, 000	18V	OJ-SS-118LMHF	g
③	ACTIVE	1721083-5	OJ-SS-109LMHF, 000	9V	OJ-SS-109LMHF	f
① ③	OBSOLETE	1721083-4	OJ-SS-106LMHF, 000	6V	OJ-SS-106LMHF	e
① ③	OBSOLETE	1721083-3	OJ-SS-105LMHF, 000	5V	OJ-SS-105LMHF	d
① ③	OBSOLETE	1721083-2	OJ-SS-103LMHF, 000	3V	OJ-SS-103LMHF	c
	ACTIVE	1721083-1	OJ-SS-112LMHF, 000	12V	OJ-SS-112LMHF	b
	ACTIVE	1461014-2	OJ-SS-124LMHF, 000	24V	OJ-SS-124LMHF	a
	PART STATUS	TE PART NO	DESCRIPTION	PART B	PART A	TYPE

RELAY TYPE

③ ⑤ NOTES:

1.LOT NO. SYSTEM AS FOLLOWING: ⑤ 5.ADD LOT NO. SYSTEM AS FOLLOWING;

WEEK
YEAR

1

1

A

I

II

III

I, DIGITS FOR DAY OF THE WEEK

1...MONDAY IN THIS WEEK;

2...TUESDAY IN THIS WEEK;

.....

7...SUNDAY IN THIS WEEK

II, DIGITS FOR SHIFT OF THE DAY

1...DAY SHIFT IN THIS DAY;

2...NIGHT SHIFT IN THIS DAY;

III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY,
SUCH AS: A,B,.....Z

⑤ 2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

⑤ 3.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKENSS AND DIAMETER.
+0.5mm FOR LENGTH.

⑤ ⑤ 4.MARKING FROM INK TO LASER AND WELDED CONTACT

		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		MW79	MAGNETIC WIRE	14
94V-0		P.B.T	CASE	13
94V-0		P.B.T	BASE	12
94VHB		NYRON	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0		P.P.S	CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag ALLOY	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	Cu ALLOY	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

H.SASAKI

CHK

N.FUNAYAMA

APVD

A.NAGAI

PRODUCT SPEC

APPLICATION SPEC


WEIGHT

-

CUSTOMER DRAWING

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL

FINISH

-

DWN

H.SASAKI

CHK

N.FUNAYAMA

APVD

A.NAGAI

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING



TE Connectivity

NAME

OJ-LMH STANDARD CUSTOMER DRAWING

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=

1721083

SCALE 5:1

SHEET 2 OF 2

REV F