



# SHV-08

## HIGH VOLTAGE RECTIFIER DIODES

**VOLTAGE RANGE: 8.0 KV**  
**CURRENT: 5.0 mA**

### Features


- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage

### Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power



### Outline Drawings : mm

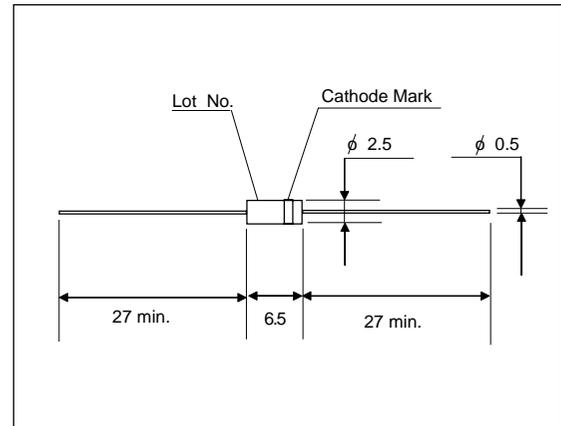

### Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbols	SHV-08	Units	
Repetitive Peak Reverse Voltage	$V_{RRM}$	8.0	kV	
Average Output Current $T_a=25^\circ\text{C}$ , Resistive Load	$I_o$	5.0	mA	
Surge Current	$I_{FSM}$	0.5	A	
Maximum Forward Voltage Drop at $25^\circ\text{C}$ , $I_F = I_{F(AV)}$	$V_F$	25	V	
Maximum Reverse Current	$V_R = V_{RRM}$	at $25^\circ\text{C}$	2.0	$\mu\text{A}$
		at $100^\circ\text{C}$	5.0	$\mu\text{A}$
Maximum Reverse Recovery Time at $25^\circ\text{C}$	$T_{rr}$	100	nS	
Junction Capacitance at $25^\circ\text{C}$ , $V_R=0\text{V}$ , $f=1\text{MHz}$	$C_j$	1.0	pF	
Junction Temperature	$T_j$	120	$^\circ\text{C}$	
Allowable Operation Case Temperature	$T_c$	120	$^\circ\text{C}$	
Storage Temperature	$T_{stg}$	-40 to +120	$^\circ\text{C}$	