

EX95000 Series

Hardened Unmanaged 16-port 10/100BASE Ethernet Switch



Overview

EtherWAN's EX95000 Series is a hardened unmanaged Fast Ethernet switching platform, designed for easy deployment in harsh environments.

The EX95000 Series is equipped with sixteen Fast Ethernet ports, or a combination of Fast Ethernet copper ports and two 100FX ports for long distance connectivity. Although unmanaged, the EX95000 is feature-rich with full wire speed Fast Ethernet throughput, making the EX95000 Series a powerful network switch.

EtherWAN – "When Connectivity is Crucial."

Spotlight

- **Hardened Grade**
 - Supports -40°C to 75°C (-40°F to 167°F) operating temperature
- **Versatile mounting Options**
 - DIN-Rail, panel or rack mounting
- **Fiber Connectivity**
 - Up to two 100BASE-FX ports with SC, ST and WDM options

Hardware Specifications

Technology

Standards

- IEEE802.3 10BASE-T
- IEEE802.3u 100BASE-TX/100BASE-FX
- IEEE802.3x Full duplex and flow control

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

Packet Buffer Memory

- 1.625M bits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE802.3x full-duplex flow control
- Auto MDI/MDIX

Address Table Size

- 4096 MAC addresses

Latency

- Less than 10µs

Power

Input Voltage

- 12 to 48VDC (Terminal Block)
- 12VDC (DC Jack)

Power Consumption

- 7.4W Max. 0.6A @ 12VDC
- 0.3A @ 24VDC
- 0.15A @ 48VDC

Protection

- Overload current protection

Mechanical

Casing

- Aluminum Case
- IP30

Dimensions

- 75.5mm (W) x 110mm (D) x 135mm (H)
(2.98" (W) x 4.33" (D) x 5.31" (H))

Weight

- 0.87Kg (1.92lbs.)

Installation

- DIN-Rail (Top hat type 35mm), Panel, Rack mounting

Interface

Ethernet Ports

- 10/100BASE-TX: 16, 15 or 14 ports
- 100BASE-FX: 0, 1 or 2 ports

LED Indicators

- Per Unit: Power 1 (Green),
Power 2 (Green),
Power 3 (Green)
- Per Port: Link/Activity (Green)

Alarm Contact

- One relay output with current 1A @ 24VDC

Environment

Operating Temperature

- -40°C to 75°C (-40°F to 167°F)

Storage Temperature

- -40°C to 85°C (-40°F to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO

- Manufactured in an ISO9001 facility

Safety

UL508

EMI

FCC Part 15B, Class A

VCCI Class A

EN61000-6-4

EN55022

EN61000-3-2

EN61000-3-3

EMS

EN61000-6-2

- EN61000-4-2 (ESD Standards)
- EN61000-4-3 (Radiated RFI Standards)
- EN61000-4-4 (Burst Standards)
- EN61000-4-5 (Surge Standards)
- EN61000-4-6 (Induced RFI Standards)
- EN61000-4-8 (Magnetic Field Standards)

Environmental Test Compliance

IEC60068-2-6 Fc (Vibration)


IEC60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/ package)


Industrial Compliance

NEMA TS2


Dimensions




Top

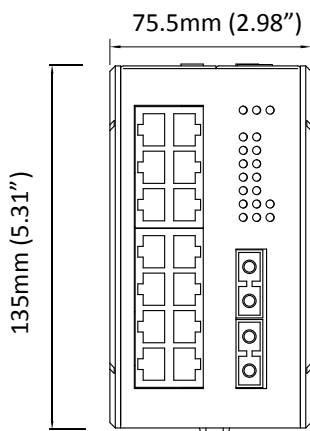


Front

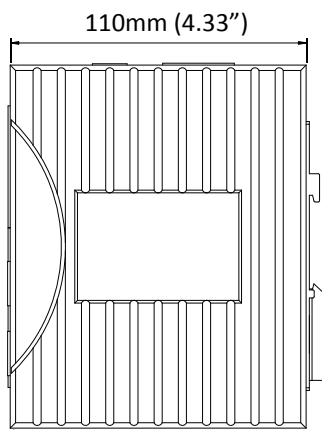

Side

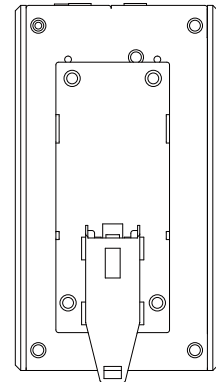

Back



Bottom

Ordering Information

Model

EX95160-00B	16-port 10/100BASE-TX Hardened Unmanaged Ethernet Switch
EX95151-X0B	15-port 10/100BASE-TX + 1-port 100BASE-FX Hardened Unmanaged Ethernet Switch
EX95142-X0B	14-port 10/100BASE-TX + 2-port 100BASE-FX Hardened Unmanaged Ethernet Switch

* DIN-Rail mounting kit included

100FX Fiber Options (X)

1	Multi Mode (SC) - 2Km
2	Multi Mode (ST) - 2Km
6	Multi Mode (SC) WDM-TX:1310nm/RX:1550nm - 2Km
7	Multi Mode (SC) WDM-TX:1550nm/RX:1310nm - 2Km
8	Multi Mode (SC) WDM-TX:1310nm/RX:1550nm - 5Km
9	Multi Mode (SC) WDM-TX:1550nm/RX:1310nm - 5Km
A	Single Mode (SC) - 20Km
B	Single Mode (SC) - 40Km
H	Single Mode (ST) - 20Km
P	Single Mode (SC) WDM-TX:1310nm/RX:1550nm - 20Km
Q	Single Mode (SC) WDM-TX:1550nm/RX:1310nm - 20Km
R	Single Mode (SC) WDM-TX:1310nm/RX:1550nm - 40Km
S	Single Mode (SC) WDM-TX:1550nm/RX:1310nm - 40Km

Optional Accessories

KP-AA96-480	Panel mounting kit
KR-BK-43-400	Rack mounting Kit
DR-30-24	30W/1.5A DIN-Rail 24VDC Industrial Power Supply (for Terminal Block)
DR-60-24	60W/2.5A DIN-Rail 24VDC Industrial Power Supply (for Terminal Block)
DR-75-24	75W/3.2A DIN-Rail 24VDC Industrial Power Supply (for Terminal Block)
DR-120-24	120W/5A DIN-Rail 24VDC Industrial Power Supply (for Terminal Block)
41-136046-X	36W/3A 12VDC hardened power adapter with open wire in aluminum housing (for Terminal Block) (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA
41-136044-X	36W/3A 12VDC hardened power adapter with latched DC Jack in aluminum housing (for DC Jack) (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA