

# Attenuator Fixed

50Ω 200 to 2500 MHz


## Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


## Outline Drawing

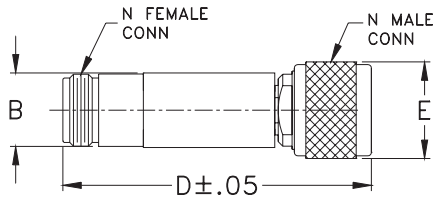

## Outline Dimensions (inch/mm)

| B     | D     | E     | wt    |
|-------|-------|-------|-------|
| .67   | 2.90  | .82   | grams |
| 17.02 | 73.66 | 20.83 | 90.0  |

## Electrical Schematic

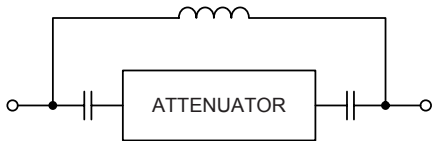

## Features

- high DC current handling
- high DC breakdown voltage
- DC resistance (in/out) 0.1Ω, typ.

## Applications

- power passing
- instrumentation
- test equipment
- lab use



CASE STYLE: FF57

Connectors Model  
N-Type NAT-6DC+

**+RoHS Compliant**



The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Electrical Specifications (T<sub>AMB</sub> = 25°C)

| FREQUENCY (MHz) | ATTENUATION (dB) |                | VSWR (:1) | POWER (mW) | DC CURRENT (Amps) | DC BREAKDOWN (Volts) |
|-----------------|------------------|----------------|-----------|------------|-------------------|----------------------|
|                 | Nom.             | Flatness, Max. | Max.      | Max.       | Max.              | Max.                 |
| 200 - 2500      | 6± 0.5           | ± 0.8          | 1.40      | 375        | 1                 | 60                   |

## Typical Performance Data at 25°C

| Frequency (MHz) | Attenuation (dB) | VSWR (:1) |
|-----------------|------------------|-----------|
| 200.00          | 6.01             | 1.03      |
| 300.00          | 5.85             | 1.05      |
| 400.00          | 5.80             | 1.06      |
| 500.00          | 5.79             | 1.07      |
| 600.00          | 5.82             | 1.07      |
| 700.00          | 5.84             | 1.07      |
| 800.00          | 5.86             | 1.08      |
| 900.00          | 5.90             | 1.09      |
| 1000.00         | 5.93             | 1.09      |
| 1200.00         | 5.98             | 1.10      |
| 1300.00         | 6.02             | 1.11      |
| 1400.00         | 6.07             | 1.11      |
| 1500.00         | 6.11             | 1.12      |
| 1600.00         | 6.14             | 1.12      |
| 1700.00         | 6.19             | 1.12      |
| 1800.00         | 6.24             | 1.12      |
| 2000.00         | 6.35             | 1.13      |
| 2100.00         | 6.39             | 1.13      |
| 2300.00         | 6.50             | 1.14      |
| 2500.00         | 6.65             | 1.15      |

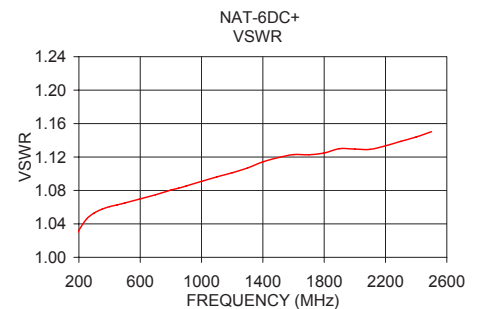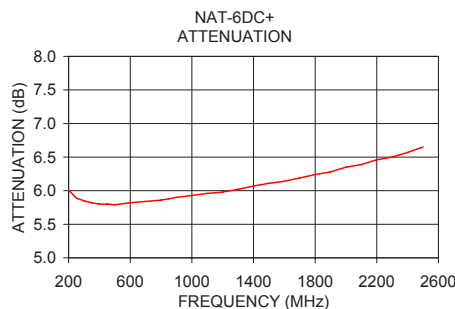

## Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

