


High Power Broadband Noise Sources

NMA5300-B1M

2000 MHz to 18000 MHz

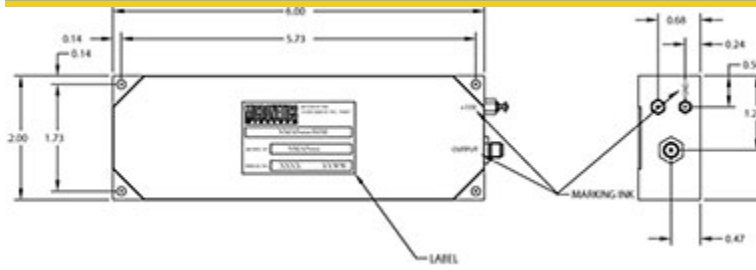

Specifications

RF Frequency	2000 MHz to 18000 MHz
Noise Output	64.5 to 72.0 dB ENR
Noise Spectral Density (N_o)	-107 dBm/Hz Min
Noise Power (N)	-5 dBm
Flatness	5 dB P-P Max
VSWR	2.0:1
Peak Factor	5:1
Bias Voltage	15 V
Supply Current	800 mA Max
Impedance	50 ohms

Package and Connectivity

Construction	Coaxial
Package Type	M Package

Environmental

Operating Temperature	0 to 70 °C
Storage Temperature	-40 to 95 °C

Notes

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

