


# SPVQ9 Water-proof Type

Two-pole simultaneous changeover switch that enables stable contact not dependent on operation position or speed

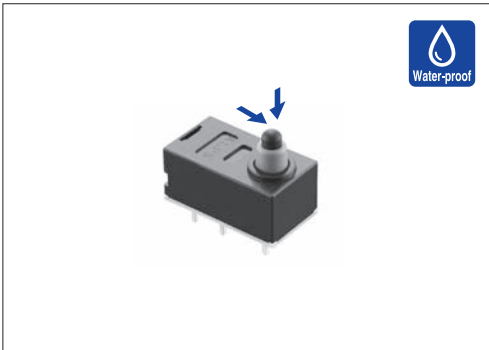

## Typical Specifications

Items		Specifications
Rating (max.)/(min.) (Resistive load)		50mA 26V DC / 50μA 5V DC
Contact resistance (Initial / After operating life)		75mΩ max. / 200mΩ max.
Operating force		1 ± 0.5N
Operating life	Without load	300,000cycles
	With load	300,000cycles (50mA 26V DC)

## Product Line

Poles	Positions	Change over timing	Operating part shape	Terminal type	Minimum order unit (pcs)		Product No.
					Japan	Export	
2	2	Non shorting	Push	For PC board	1,500	6,000	<b>SPVQ910201</b>

## Note

This unit cannot be used in water (IP67 rating, except for terminal).


## Packing Specifications

Tray


Number of packages (pcs.)		Export package measurements (mm)
1 case /Japan	1 case /export packing	
1,500	6,000	540×360×270

## Dimensions

Unit:mm

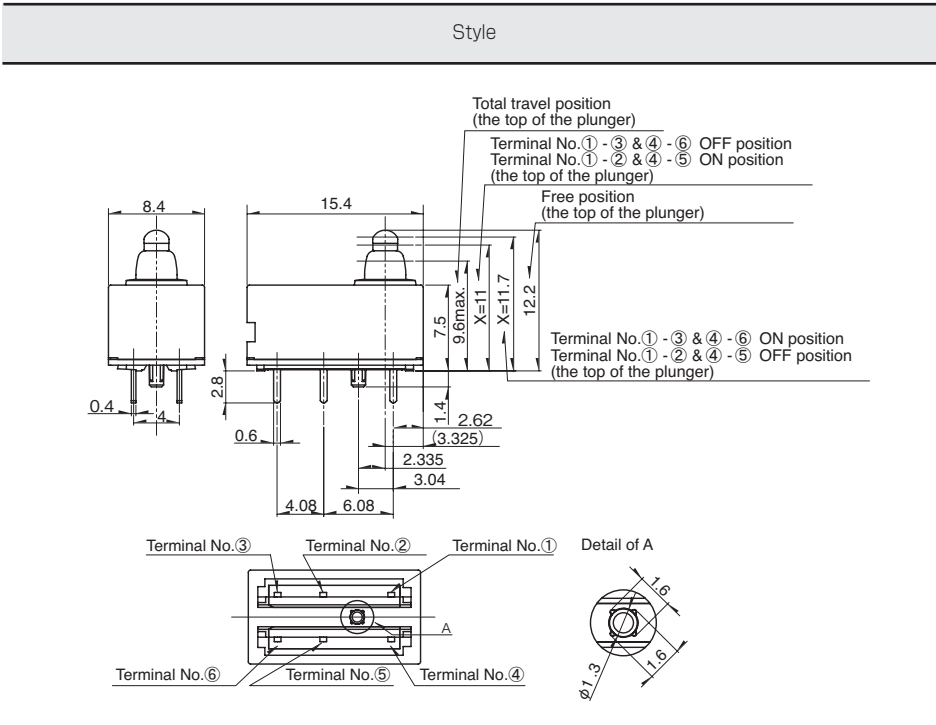











## Circuit Diagram



Refer to P.71 for soldering conditions.

Detector  
Slide  
Push  
Rotary  
Power  
Dual-In-line Package Type  
General-purpose Type  
Water-proof Type

Series		Water-proof Type				
		SPVQ8	SPVQ9	SPVQA	SPVQC	SSCN
Photo						
Operation type		Two-way				
Dimensions (mm)	W	8.3	15.4	15.2	15.4	13
	D	5.3	8.4	6.4	7.4	5
	H	6.5	7.5	7.95	7.5	15
Operating temperature range		-40°C to +85°C				
Automotive use		●	●	●	●	●
Life cycle (availability)						
Poles / Positions		1/1	2/2	1/1 1/2	2/2	1/2
Rating (max.) (Resistive load)		0.1A 12V DC	50mA 26V DC	0.1A 12V DC	50mA 18V DC	0.1A 12V DC
Rating (min.) (Resistive load)		50μA 5V DC				100μA 5V DC
Durability	Operating life without load	300,000cycles 1Ω max. or 1,000,000cycles 3Ω max.	300,000cycles 200mΩ max.	300,000cycles 1Ω max.	300,000cycles 200mΩ max.	100,000cycles 1Ω max.
	Operating life with load Rating (max.) (Resistive load)	300,000cycles 1Ω max. or 1,000,000cycles 3Ω max.	300,000cycles 200mΩ max.	300,000cycles 1Ω max.	300,000cycles 200mΩ max.	100,000cycles 1Ω max.
Electrical performance	Initial contact resistance	500mΩ max.	75mΩ max.	500mΩ max.	75mΩ max.	500mΩ max.
	Insulation resistance	100MΩ min. 500V DC			100MΩ min. 250V DC	100MΩ min. 500V DC
	Voltage proof	500V AC for 1minute			250V AC for 1minute	500V AC for 1minute
Mechanical performance	Terminal strength	3N for 1minute (with terminal) Wire strength 30N for 1minute (with wire)	3N for 1minute			
	Actuator strength	20N				10N
Environmental performance	Cold	-40°C 500h				
	Dry heat	85°C 500h				
	Damp heat	60°C, 90 to 95% RH 500h				
Operation force		1±0.5N				2N max.
Page		60	65	66	69	70


Detector Switches Soldering Conditions . . . . . 71  
 Detector Switches Cautions . . . . . 72

**Note**  
 ● Indicates applicability to all products in the series.

# Detector Switches Soldering Conditions

## Example of Reflow Soldering Condition

1. Heating method: Double heating method with infrared heater.
2. Temperature measurement: Thermocouple  $\phi 0.1$  to  $0.2$  CA (K) or CC (T) at soldering portion (copper foil surface).  
A heat resisting tape should be used for fixed measurement.
3. Temperature profile

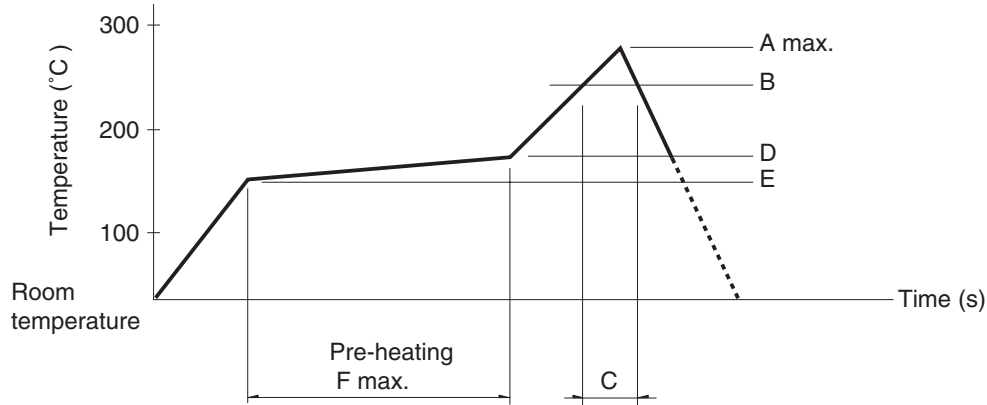

Series (Reflow type)	A (°C) 3s max.	B (°C)	C (s)	D (°C)	E (°C)	F (s)
<b>SPPB</b>	250	230	40	180	150	120
<b>SPPW8</b>			35			
<b>SPVE</b>	260		40			
<b>SPVL</b>						
<b>SPVM</b>						
<b>SPVN</b>						
<b>SPVR</b>						
<b>SPVS</b>						
<b>SPVT</b>						
<b>SSCM</b>						
<b>SSCQ</b>						
<b>SPVQC</b>	250					

### Notes

1. The condition mentioned above is the temperature on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, surface depending on the PC board's material, size, thickness, etc.  
The above-stated conditions shall also apply to switch surface temperatures.
2. Soldering conditions differ depending on reflow soldering machines.  
Prior verification of soldering condition is highly recommended.

### Reference for Hand Soldering

Series	Soldering temperature	Soldering time
<b>SPVS, SPVN, SPVT, SPVM, SPVR, SPVE, SPPW8, SSCQ, SSCM, SPVL, SSCT, SPVQC</b>	350±5°C	3s max.
<b>SPVQ1, SPVQ3, SPVQ6, SPVQ7, SPVQ8, SPVQ9, SSCN, SPVQA</b>	300±10°C	3 +1 / 0s
<b>SPPB (Reflow)</b>	300±5°C	5s max.
<b>SSCF, SPPB (For Lead, Dip)</b>	350±10°C	3 +1 / 0s

### Reference for Dip Soldering

(For PC board terminal types)

Series	Items		Dip soldering	
	Preheating temperature	Preheating time	Soldering temperature	Duration of immersion
<b>SSCT, SPVQ1, SPVQ3, SPVQ6, SPVQ7, SPVQ8, SPVQ9, SPVQA</b>	100±10°C	60s max.	260±5°C	5±1s
<b>SPPW8, SPPB</b>	100 °C max.	60s max.	255±5°C	5±1s
<b>SSCF</b>	—		260±5°C	5±1s