

# TPS-1080-M12-BP2 Series



TPS-1080-M12-BP2 Series

➔ **EN50155 8-port unmanaged PoE Ethernet switch with 8x10/100Base-T(X) P.S.E., M12 connector and 2xbypass included**

## Features


- Leading EN50155-compliant Ethernet switch for rolling stock application
- Provide 8x10/100Base-T(X) PoE (P.S.E.) ports
- Supports IEEE 802.3at compliant PoE with maximum 30Watts per port
- Support dual power inputs for power redundancy
- Support auto-negotiation and auto-MDI/MDI-X
- Support store and forward transmission
- Support flow control
- Built-in 2 sets of bypass ports
- M12 connectors to guarantee reliable operation against environmental disturbances
- Rigid IP-40 housing design
- Wall mounting enabled



## Introduction

ORing's Transporter™ series un-managed Ethernet switches are designed for industrial applications, such as rolling stock, vehicle, and railway applications. The TPS-1080-M12-BP2 is an un-managed PoE Ethernet switch with 8x10/100Base-T(X) P.S.E. (4 of these ports also double as 2 sets of bypass ports), which is specifically designed for the toughest and fully compliant with EN50155 requirement. TPS-1080-M12-BP2 also supports Power over Ethernet, a system to transmit electrical power, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. Each TPS-1080-M12-BP2 switch has 8X10/100Base-T(X) P.S.E. (Power Sourcing Equipment) ports. P.S.E. is a device (switch or hub for instance) that will provide power in a PoE setup. TPS-1080-M12-BP2 EN50155 Ethernet switch use M12 connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. TPS-1080-M12-BP2 includes 2 sets of bypass ports that protect the network from failures and Network maintenance by ensuring network integrity during power loss. In addition, the wide operating temperature range from -40 to 70°C can satisfy most of operating environment. Therefore, the switch is one of the most reliable choices for rolling stock and highly-managed PoE Ethernet application.


## PoE Pin Definition

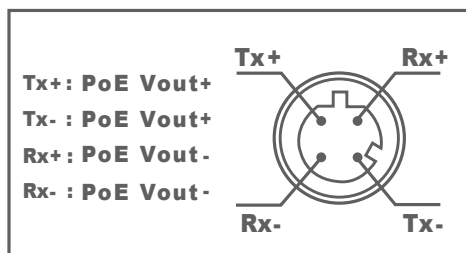

- Industrial Ethernet Switch
- Industrial Media Converter
- Industrial Device Server
- Industrial Wireless Access Point
- Industrial Cellular VPN Router
- Industrial M2M Gateway
- Accessories
- Network Management Software

**Dimensions**


Dimension (Unit =mm)

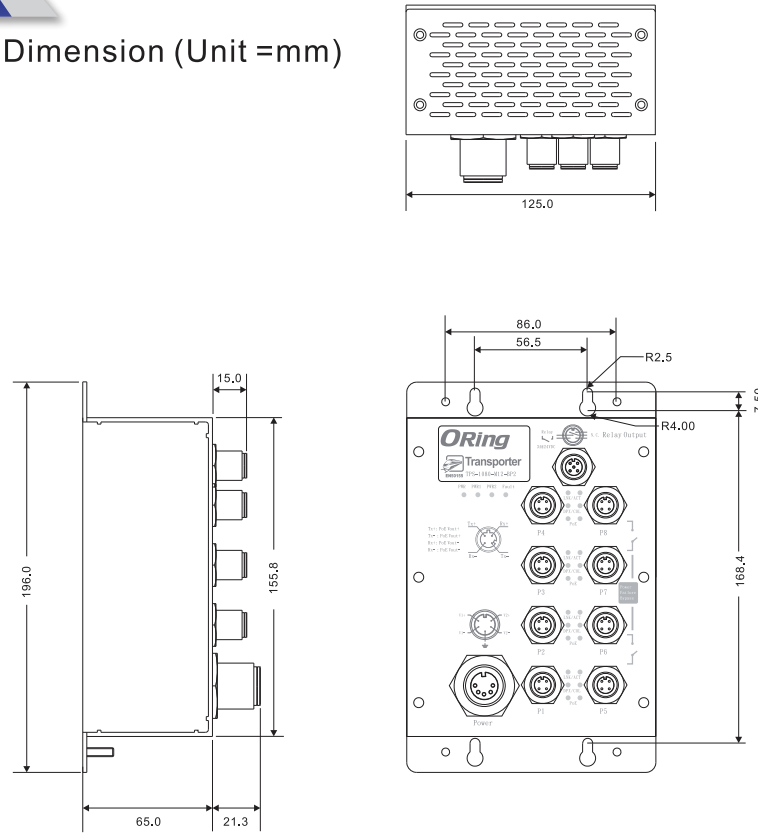

TPS-1080-M12-BP2

**PoE Power Distribution**

(Watts)

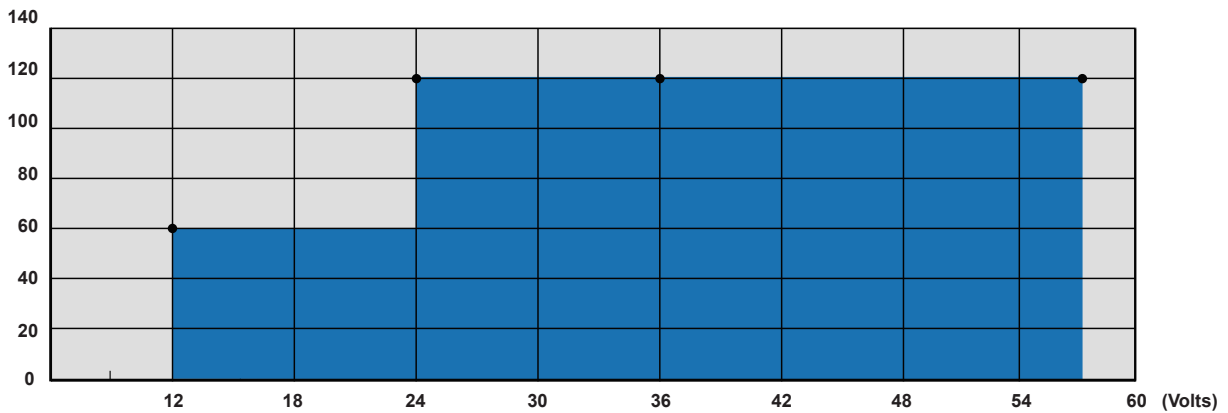

TPS-1080-M12-BP2-24V model PoE Power Distribution

## Specifications

ORing Switch Model	TPS-1080-M12-BP2	TPS-1080-M12-BP2-24V
<b>Physical Ports</b>		
10/100Base-T(X) Ports in M12 With P.S.E.	8 x M12 connector (4-pin D-coding, bypass function included by last 4 ports)	
<b>Technology</b>		
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3x for Flow control IEEE 802.3at compliant PoE specification (Maximum 30Watts per port)	
Processing	Store-and-Forward	
MAC Table	8K MAC addresses	
<b>LED Indicators</b>		
Power Indicator	Green : Power LED x 3	
Fault indicator	Amber : Indicate PWR1 or PWR2 failure	
10/100Base-T(X) M12 port indicator and PoE indicator	Top for port Link/Act indicator. Green for 100Mbps link, Amber for 10 Mbps link Middle Amber for Duplex / Collision indicator Bottom blue for PoE Injected indicator	
<b>Fault contact</b>		
Relay	Relay output to carry capacity of 3A at 24VDC on M12 connector (5-pin A-coding)	
<b>Power</b>		
Redundant Input power	Dual DC inputs. 50~57VDC on 5-pin M23 connector	Dual DC inputs. 24 (12~57VDC) VDC on 5-pin M23 connector
Power Consumption (Typ.)	2.5 Watts (power consumption of P.S.E. is not included)	7.5 Watts (power consumption of P.S.E. is not included)
PoE Output Power	240 Watts	60 Watts (12~24VDC) / 120 Watts (24~57VDC)
Overload Current Protection	Present	
Reverse Polarity Protection	Present	
<b>Physical Characteristics</b>		
Enclosure	IP-40	
Dimensions (W x D x H)	125 (W) x 65 (D) x 196 (H) mm	
Weight (g)	1018 g	1076 g
<b>Environmental</b>		
Storage Temperature	-40 to 85°C (-40 to 185°F)	
Operating Temperature	-40 to 70°C (-40 to 158°F)	
Operating Humidity	5% to 95% Non-condensing	
<b>Regulatory Approvals</b>		
EMI	FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011, EN50121-4)	
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11	
Shock	IEC60068-2-27	
Free Fall	IEC60068-2-32	
Vibration	IEC60068-2-6	
Warranty	5 years	

## Ordering Information

TPS-1 **AA** **B** -M12- **CCC**

Code Definition	10/100 Base-T(X) P.S.E. Port Number	Additional Port Number with 10/100Base-T(X)	Bypass Function
<b>Option</b>	- <b>08</b> : 8 ports	- <b>0</b> : 0 port	- <b>BP2</b> : 2xbypass function included
Available Model	Model Name	Description	
	TPS-1080-M12-BP2	EN50155 8-port unmanaged PoE Ethernet switch with 8x10/100Base-T(X) P.S.E., M12 connector and 2xbypass included	
	TPS-1080-M12-BP2-24V	EN50155 8-port unmanaged PoE Ethernet switch with 8x10/100Base-T(X) P.S.E., M12 connector and 2xbypass included, 24VDC power inputs	
<b>Packing List</b>		<b>Optional Accessories</b>	
<ul style="list-style-type: none"> <li>TPS-1080-M12-BP2</li> <li>Quick Installation Guide</li> </ul>		<ul style="list-style-type: none"> <li>M12C : M12 cable accessories</li> </ul>	