

EFRP-S2502

PS2 Mini Redundant 500W Power Supply

Features:

- Mini Redundant Form Factor
- 500W with ATX Outputs
- 80PLUS® Bronze Level Power Efficiency
- 1+1 Redundancy / Load Sharing
- 5~50°C Working Temperature

General Specification

- Input Range: 100 to 240 VAC, +/-10%
- Power Factor: > 0.99 minimum
- Efficiency: ≥85% @ 50% Load (Power Module)
- Hold Up Time: 20 ms @ 80% Load
- Short Circuit Protection
- Over Current Protection
- Over Voltage Protection
- No Load Operation
- MTBF >100,000 Hours@25°C
- Operating Temperature: -5 to 50 °C
- Operating Humidity: 20 to 90 %
- EMI/RFI: CE, FCC class A
- Safety: UL, TUV, CCC 5000 Meter , CB,



EFRP-S2502

Input and Output Characteristics

Input			DC Output					
Voltage	Frequency	Current	Load	+3.3V	+5V	+12V	-12V	+5Vsb
100~240 VAC	47~63Hz	4-8A	Max.Load	25A	30A	41A	0.5A	2.5A
			Min.Load	1A	1A	0.05A	0A	0A

1. Note 1: Combined load on 3.3V and 5V rails shall not exceed 170W.
2. Note 2: Total output power shall not exceed 500W.


Ripple and Noise

Output	+3.3V	+5V	+12V	-12V	5Vsb
Load Regulation	±5%	± 5%	± 5%	± 10%	± 5%
Line Regulation	± 1%	± 1%	± 1%	± 1%	± 1%
Ripple & Noise	50mV	50mV	120mV	120mV	50mV

Mechanical

Outline Dimension: 150x85x190(mm)

Outline Drawing

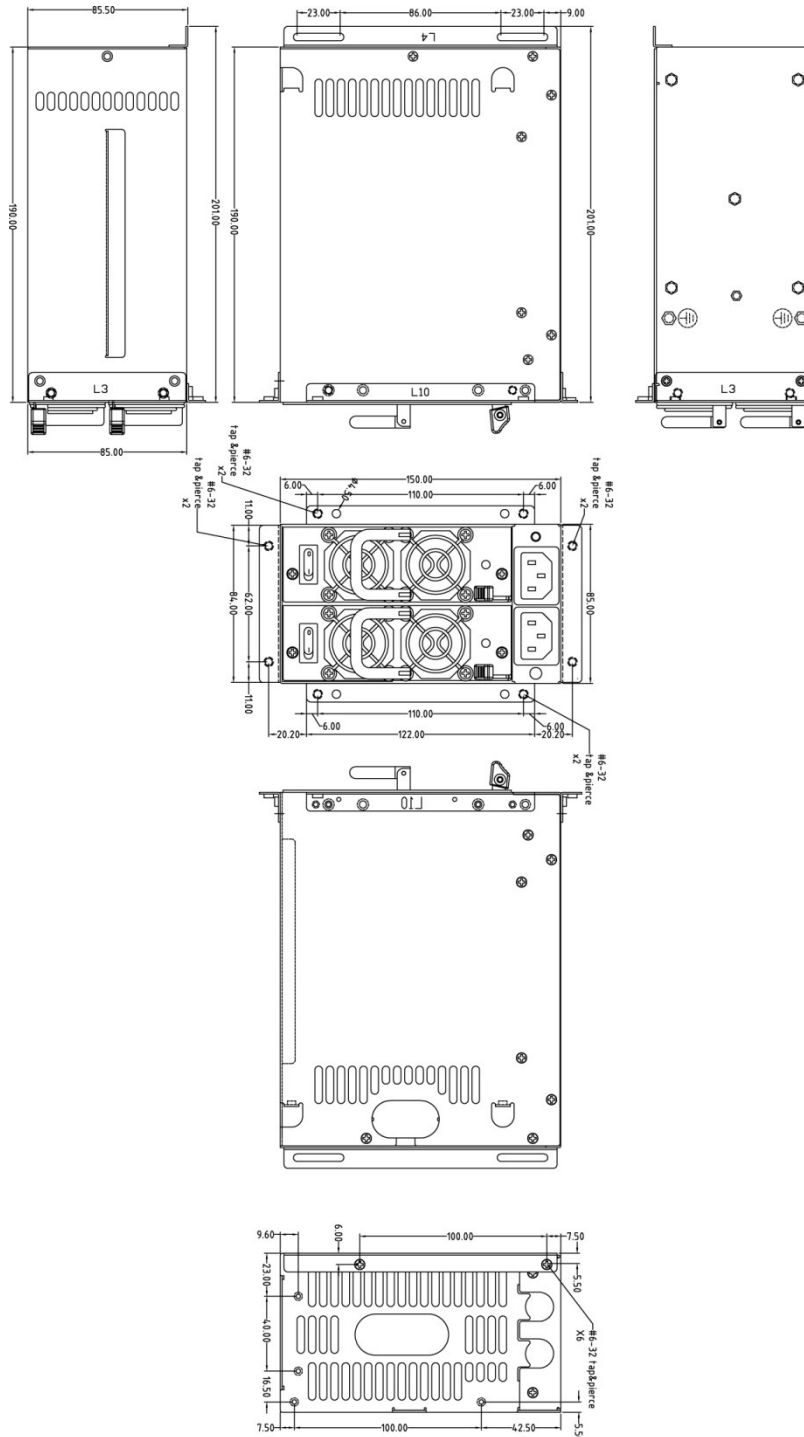

©ETASIS Electronic Corporation. All rights reserved. ETASIS Electronics Corporation reserves the right to make changes to their products, specification, or to discontinue any product and its service at anytime without notice. The information and specification from ETASIS is believed to be accurate and reliable. However, ETASIS assumes no responsibility for any business loss due to specification changes. ETASIS products are not designed to be used in system deemed to be critical, or in any system wherein failure or malfunction could result in injury or death.