SHEET OF

NOTES:

1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
   350mA, 110V AC/DC
5. CONTACT RATING (NON-SWITCHING) 5A
6. OPERATING FORCE: 425±100 CM/STANDARD
7. OPERATING TEMP: -30° to 85°C
8. ▲ CIRCUIT SP: 11 POSITIONS, 30° INDEX, NOTE THIS IS A KC52 (12 POSITION) WITH LOCKRING INCLUDED.
9. ▲ DIELECTRIC STRENGTH 1000V RMS min.@ SEA LEVEL
10. DESIGNATE MAJOR DIMENSIONS
11. LOCK NUT AND WASHER NOT SHOWN.
    LOCK RING SUPPLIED WITH LOCKRING TAB IN SLOT 11.
12. 2002/95/EC (ROHS) COMPLIANT

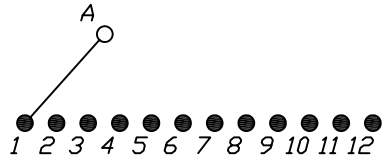

CONTACT CONFIGURATION
TIMING: (BBM) Non-SHORTING

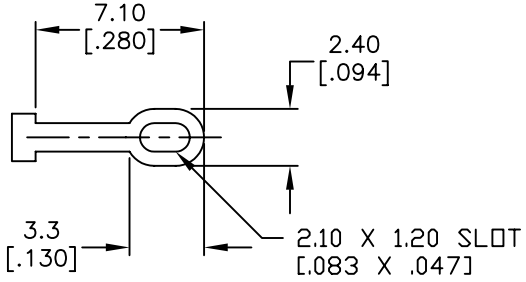

TERMINATION DETAIL
SCALE 2X

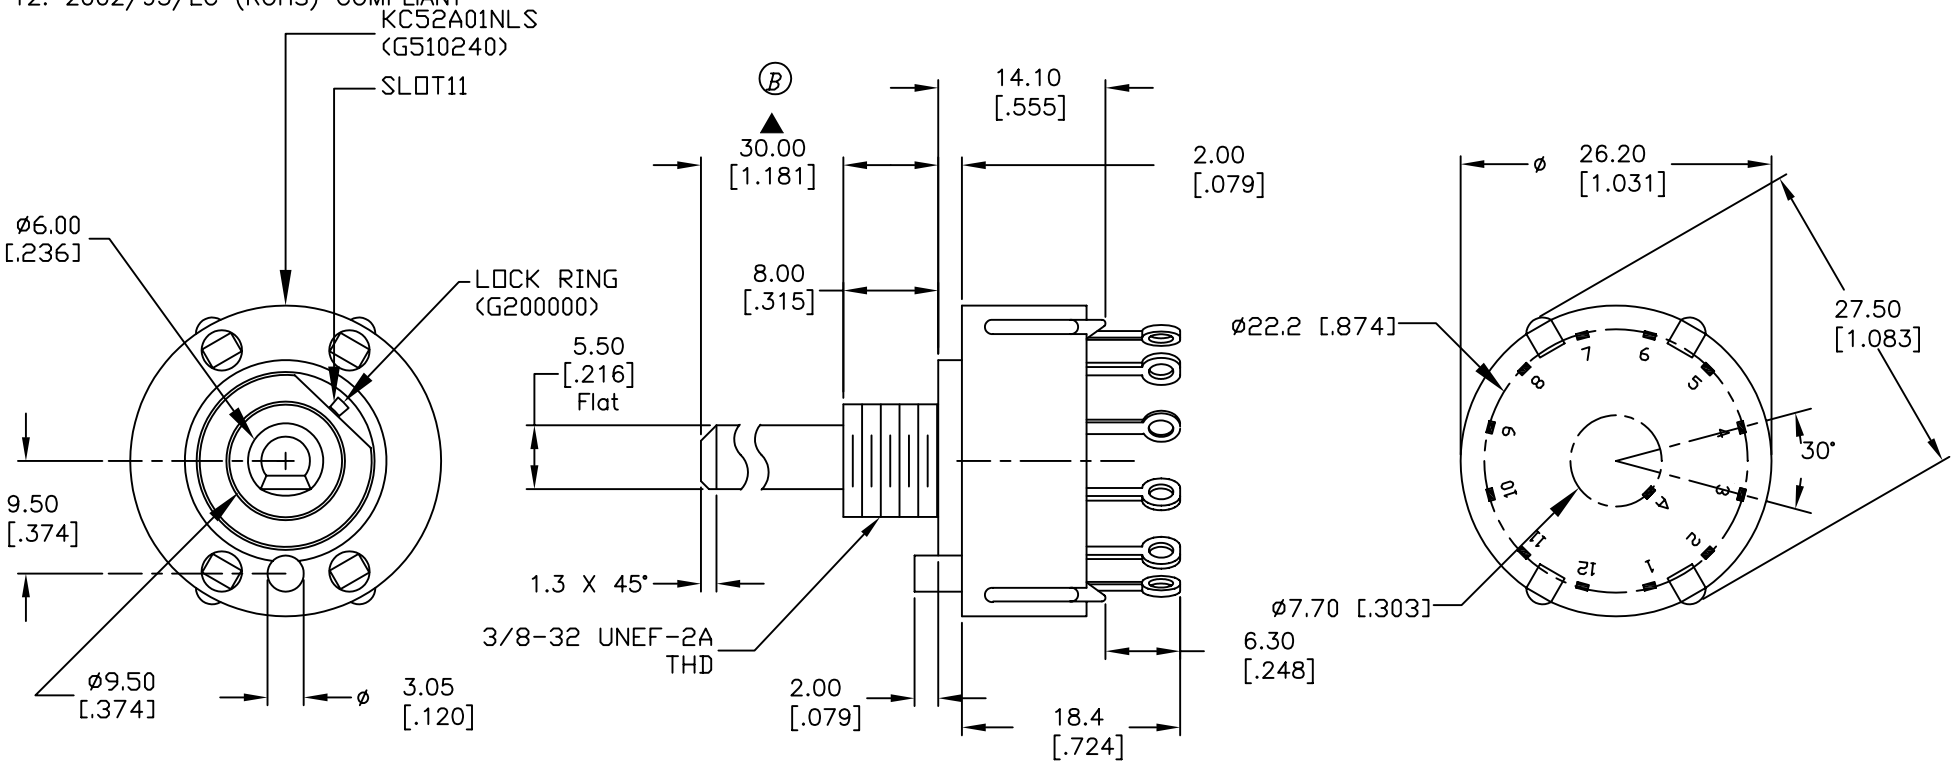

REV.	ECN No.	DESCRIPTION	DATE	CHKD
D	17352	FIXED NOTE NUMBER 8	6/6/07	TN
C	17213	REACTIVATED, UPDATED	4/23/07	TN
B	12173	REVISED PART DESCRIPTION	5/21/02	CJB
A	11923	RELEASED FOR PRODUCTION	2/14/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE: KC52A30.001NLS WITH LOCKRING

SCALE	DATE	DR	DWG	REV
1.5:1	6/6/07	TN	XG0003P	D