



SMA SPST PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +30 dBm

PIN Diode Switches Technical Data Sheet

PE71S2007

Features

- SPST Reflective Switch
- 0.05 GHz to 26.5 GHz
- Insertion Loss 5 dB max
- Isolation 20 dB min
- Power Input 30 dBm CW max

Applications

- Test & Measurement
- Military Communication
- Commercial Communication

Description

The PE71S2007 is a SPST Reflective Switch designed to operate over the 2.0 GHz to 26.5 GHz Frequency Range. The switch is designed to maintain low insertion loss, high isolation, and fast switching speed.

Electrical Specifications

TTL Control Logic

Off/Isolation: "0"
 On/Low Loss: "1"

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.05		26.5	GHz
Impedance		50		Ohms
Insertion Loss			5	dB
Isolation	20			dB
Switching Time			150	ns
Input Power (CW)			1	Watts
Positive Operating Voltage		5		Volts
Negative Operating Voltage		-5		Volts
Operating Temperature	-55		85	deg C

Mechanical Specifications

Size

Length	1.2 in [30.48 mm]
Width	1.2 in [30.48 mm]
Height	0.6 in [15.24 mm]
Package Type	Connectorized Module
Design	SPST, Reflective
RF Connector	SMA Female

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA SPST PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +30 dBm PE71S2007](#)



SMA SPST PIN Diode Switch Operating From
50 MHz to 26.5 GHz Up To +30 dBm

PIN Diode Switches Technical Data Sheet

PE71S2007

Environmental Specifications

Temperature

Operating Range

ESD Sensitivity

-55 to 85 deg C

ESD Sensitive Material, Transport material in Approved
ESD bags. Handle only in ESD Workstation.



Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

Plotted and Other Data

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA SPST PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +30 dBm PE71S2007](#)



SMA SPST PIN Diode Switch Operating From
50 MHz to 26.5 GHz Up To +30 dBm

PIN Diode Switches Technical Data Sheet

PE71S2007

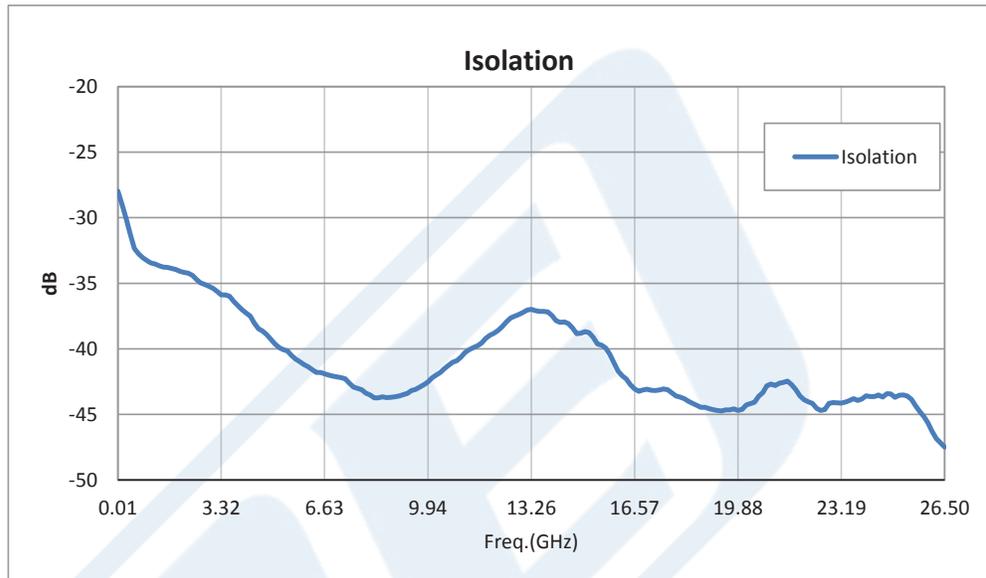


SMA SPST PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +30 dBm from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA SPST PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +30 dBm PE71S2007](#)



PE71S2007 CAD Drawing

SMA SPST PIN Diode Switch Operating From 50 MHz to 26.5 GHz Up To +30 dBm

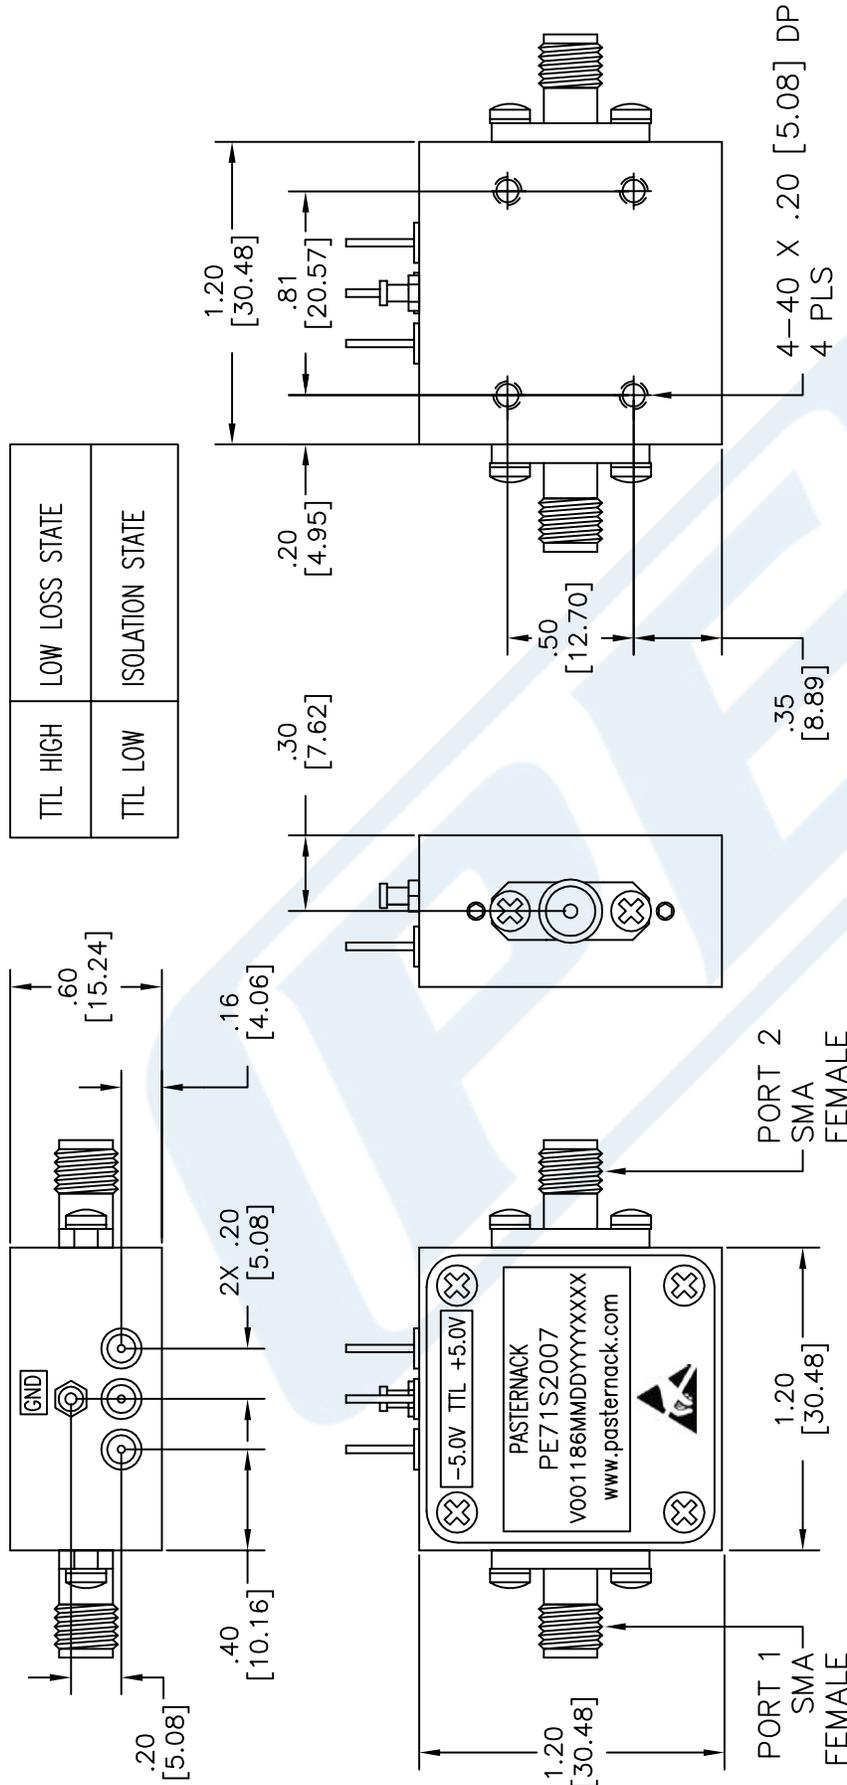

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN: inches [mm]
 TOLERANCES ARE:
 .XX ± .01 [±.25]
 .XX ± .001 [±.025]

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

DWG TITLE
PE71S2007

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. FITS MIL-C-17 AND EQUIVALENT CABLES.

PE PASTERNAK
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 082615

SCALE N/A

SIZE A

2233