



SAW Components

SAW duplexer

WCDMA band VIII


Series/type:	B8521
Ordering code:	B39941B8521P810
Date:	November 26, 2014
Version:	2.0

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.


EPCOS AG is a TDK Group Company.

Application


- Low-loss SAW duplexer for mobile telephone WCDMA Band VIII systems
- Low insertion attenuation
- Low amplitude ripple
- Usable passband 35 MHz
- Single ended to balanced transformation in Antenna - Rx path
- Impedance transformation 50Ω to 100Ω in Antenna - Rx path
- high Tx - Rx isolation


Features

- Package size 1.8 x 1.4 mm², max package height 0.475 mm.
- RoHS compatible
- approx. weight 0.0042g
- Package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- **Moisture Sensitive Level 3**

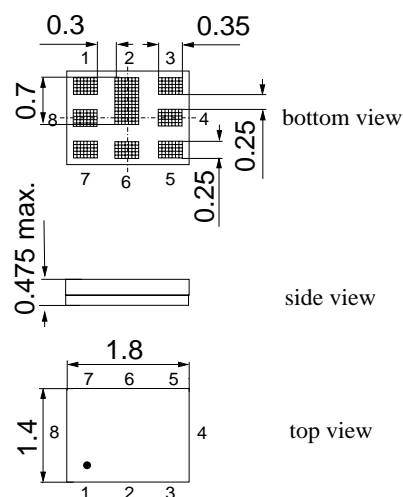
Pin configuration

- 1 TX input, single ended
- 3,4 RX output, balanced
- 6 Antenna
- 2,5,7,8 To be Grounded

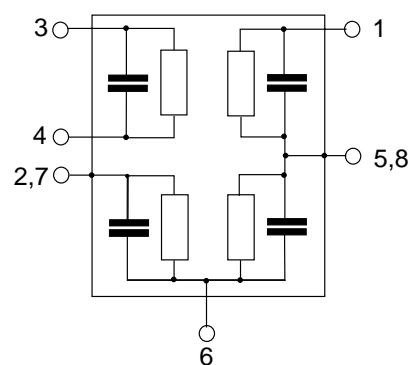

Data Sheet

Characteristics

Temperature range for specification:	T = -20 °C to +90 °C
ANT terminating impedance:	Z _{ANT} = 50 Ω 5.6nH
TX terminating impedance:	Z _{TX} = 50 Ω
RX terminating impedance:	Z _{RX} = 100 Ω (balanced)

Characteristics Tx - Ant					min.	typ. @ 25 °C	max.	
Center frequency		f _C			—	897.5	—	MHz
Maximum insertion attenuation								
@f _{Carrier}	882.4 ... 912.6	MHz	α _{WCDMA} ¹⁾		—	2.1	2.8	dB
	880.0 ... 915.0	MHz			—	2.8	3.9	dB
	880.24 ... 914.76	MHz			—	2.7	3.8	dB
Amplitude ripple (p-p)								
@f _{Carrier}	882.4 ... 912.6	MHz	Δα _{WCDMA} ¹⁾		—	1.2	1.8	dB
Error Vector Magnitude								
@f _{Carrier}	882.4 ... 912.6	MHz	EVM ²⁾		—	2.1	6.0	%
VSWR								
TX port	880.0 ... 915.0	MHz			—	1.7	2.1	
ANT port	880.0 ... 915.0	MHz			—	1.7	2.1	
Attenuation			α					
	0.3 ... 716.0	MHz			30	37	—	dB
	716.0 ... 728.0	MHz			32	37	—	dB
	728.0 ... 821.0	MHz			30	35	—	dB
@f _{Carrier}	927.4 ... 957.6	MHz	α _{WCDMA} ¹⁾		42	48	—	dB
	925.0 ... 960.0	MHz			38 ³⁾	48	—	dB
	925.24 ... 959.76	MHz			41 ³⁾	48	—	dB
	1565.42 ... 1573.374	MHz			37	45	—	dB
	1573.374... 1577.466	MHz			37	45	—	dB
	1577.466... 1585.42	MHz			37	44	—	dB
	1597.55 ... 1605.89	MHz			37	43	—	dB
	1760.0 ... 1830.0	MHz			32	38	—	dB
	1830.0 ... 1880.0	MHz			27	33	—	dB
	2110.0 ... 2170.0	MHz			27	32	—	dB
	2400.0 ... 2500.0	MHz			28	33	—	dB
	2620.0 ... 2745.0	MHz			22	27	—	dB
	3520.0 ... 3660.0	MHz			20	26	—	dB
	4400.0 ... 4575.0	MHz			20	30	—	dB
	5150.0 ... 5490.0	MHz			15	18	—	dB
	5725.0 ... 5850.0	MHz			10	16	—	dB

¹⁾ Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (6).

²⁾ Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141.

³⁾ T=0 °C to +90 °C

Data Sheet

Characteristics

Temperature range for specification:	T = -20 °C to +90 °C
ANT terminating impedance:	Z _{ANT} = 50 Ω 5.6nH
TX terminating impedance:	Z _{TX} = 50 Ω
RX terminating impedance:	Z _{RX} = 100 Ω (balanced)

Charcteristics Rx - Ant					min.	typ. @ 25 °C	max.	
Center frequency	f _C				—	942.5	—	MHz
Maximum insertion attenuation								
@f _{Carrier} 927.4 ... 957.6 MHz	α _{WCDMA} ¹⁾				—	2.0	2.5	dB
925.0 ... 960.0 MHz					—	2.5	3.7	dB
925.24 ... 959.76 MHz					—	2.5	3.5	dB
Amplitude ripple (p-p)								
@f _{Carrier} 927.4 ... 957.6 MHz	Δα _{WCDMA} ¹⁾				—	0.6	1.2	dB
Error Vector Magnitude								
@f _{Carrier} 927.4 ... 957.6 MHz	EVM ²⁾				—	2.7	6.0	%
VSWR								
RX port 925.0 ... 960.0 MHz					—	1.8	2.1	
ANT port 925.0 ... 960.0 MHz					—	1.8	2.1	
Attenuation	α							
0.3 ... 880.0 MHz					35	62	—	dB
@f _{Carrier} 882.4 ... 912.6 MHz	α _{WCDMA} ¹⁾				50	58	—	dB
880.0 ... 915.0 MHz					46	56	—	dB
1045.0 ... 4810.0 MHz					35	58	—	dB
1850.0 ... 1920.0 MHz					40	58	—	dB
2400.0 ... 2484.0 MHz					45	58	—	dB
2775.0 ... 2880.0 MHz					45	60	—	dB
Common Mode Rejection Ratio	α							
925.0 ... 960.0 MHz					25	33	—	dB
IMD product level limits³⁾								
at f_{TX} = 897.5MHz, f_{RX} = 942.5MHz								
Blocker 1	45.0 MHz				—	-127	-115	dBm
Blocker 2	852.5 MHz				—	-111	-100	dBm
Blocker 3	1840.0 MHz				—	-110	-100	dBm
Blocker 4	2737.5 MHz				—	-110	-100	dBm

1) Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (6).

2) Error Vector Magnitude (EVM) based on definition given in 3GPP TS 25.141.

3) Power levels: 21dBm Tx signal, -15dBm blocker at antenna port

Data Sheet

Characteristics

Temperature range for specification:	T = -20 °C to +90 °C
ANT terminating impedance:	Z _{ANT} = 50 Ω 5.6nH
TX terminating impedance:	Z _{TX} = 50 Ω
RX terminating impedance:	Z _{RX} = 100 Ω (balanced)

Charcteristics Tx - Rx					min.	typ. @ 25 °C	max.	
Differential Mode Isolation								
	880.0	...	915.0	MHz	52	58	—	dB
@f _{Carrier}	882.4	...	912.6	MHz α _{WCDMA} ¹⁾	55	60	—	dB
	925.0	...	960.0	MHz	40 ²⁾	56	—	dB
	925.24	...	959.76	MHz	43 ²⁾	56	—	dB
@f _{Carrier}	927.4	...	957.6	MHz α _{WCDMA} ¹⁾	48	58	—	dB
Common Mode Isolation								
@f _{Carrier}	882.4	...	912.6	MHz α _{WCDMA} ¹⁾	55	63	—	dB

¹⁾ Attenuation of WCDMA signal ("Powertransferfunction"). Please refer to annotation on page (6).

²⁾ T=0 °C to +90 °C


Maximum ratings

Storage temperature range	T _{stg}	-40/+90 ¹⁾	°C	
DC voltage	V _{DC}	5	V	
ESD voltage	V _{ESD}	100 ²⁾	V	machine model, 10 pulses
ESD voltage	V _{ESD}	300 ³⁾	V	HBM,+/- 1 pulses
ESD voltage	V _{ESD}	600 ⁴⁾	V	CDM,+/- 3 pulses
Input power at	P _{IN}			
880.0 ... 915.0 MHz		29	dBm	} continuous wave 50 °C, 5000 h
elsewhere		10	dBm	

1) Extended upperlimit: 168@125°C acc. to IEC 60068-2-2 Bb.

2) acc. to JESD22-A115B (machine model), 10 negative & 10 positive pulses.

3) acc. to JESD22-A114F (human body model), 1 negative & 1 positive pulses.

4) acc. to JESD22-A101C (charge device model), 3 negative & 3 positive pulse

Annotation for characteristics section

Attenuation of WCDMA signal ("Powertransferfunction", α_{WCDMA}) is determined by


$$\int_{-\infty}^{\infty} |S_{\text{ds2l}}(f)H_{\text{RRC}}(f - f_{\text{Carrier}})|^2 df$$

f_{Carrier} according to 3GPP TS 25.101 (e.g. for UMTS-Passband, f_{Carrier} ranges from 2112.4 MHz (lowest Rx channel) to 2167.6 MHz (highest Rx channel)). $H_{\text{RRC}}(f)$ is the transfer function of the root-raised cosine transmit pulse shaping filter according to 3GPP TS 25.101 with the following normalization:


$$\int_{-\infty}^{\infty} |H_{\text{RRC}}(f)|^2 df = 1$$



Frequency Response TX-ANT (Power transfer function)

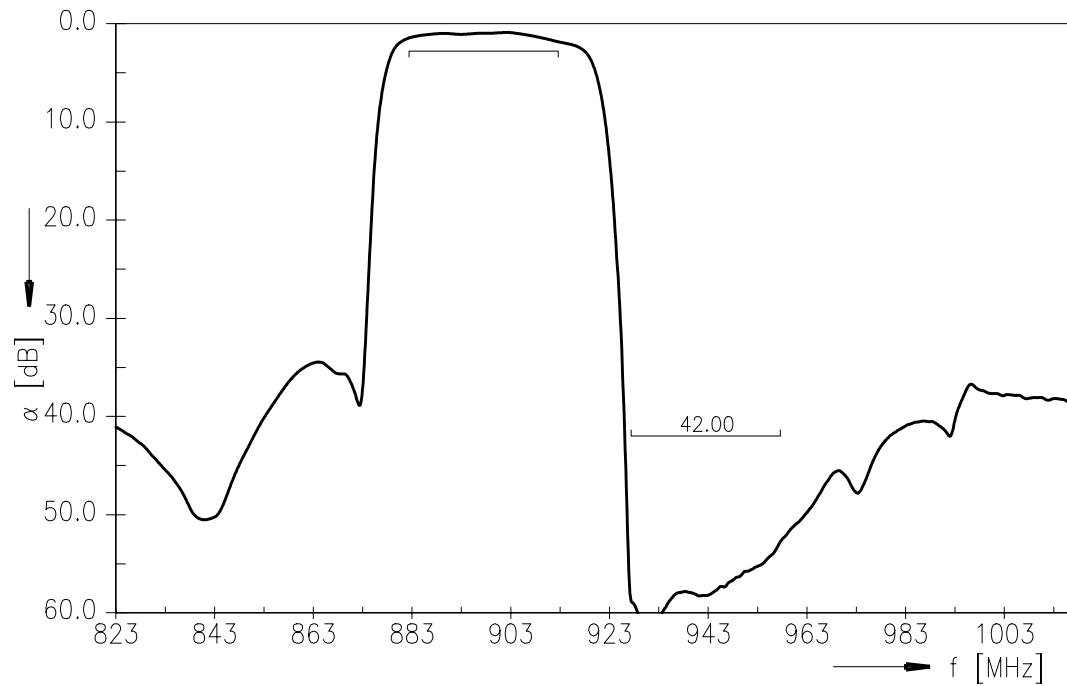


Frequency Response TX-Ant (CW test signal, specification temperature range T=0 °C to +90 °C)

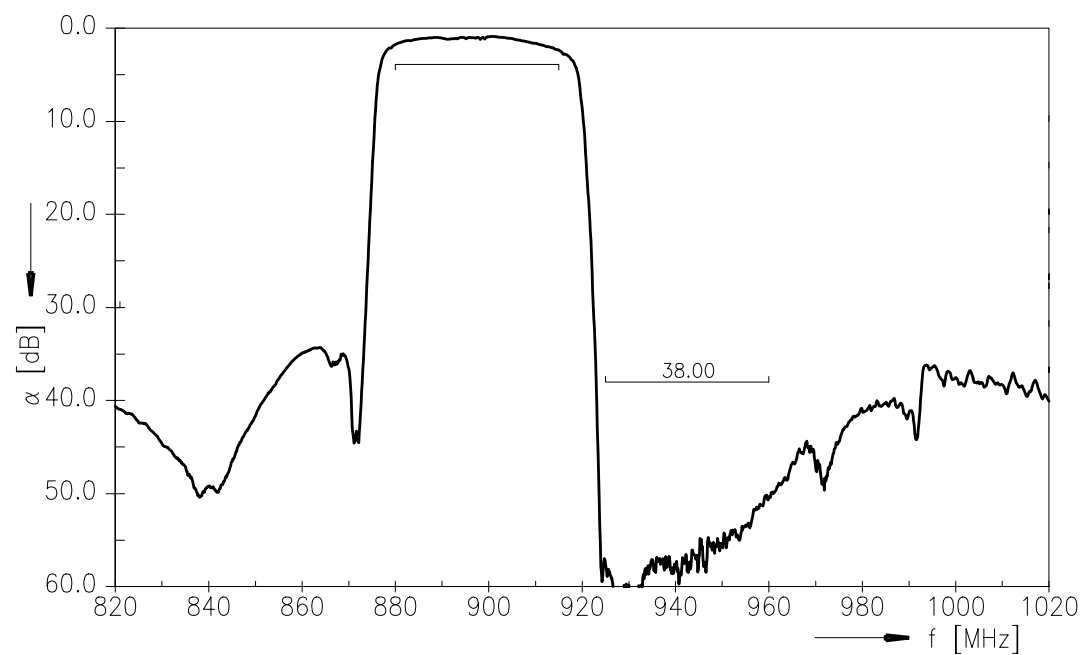




Frequency Response TX-ANT (wideband)

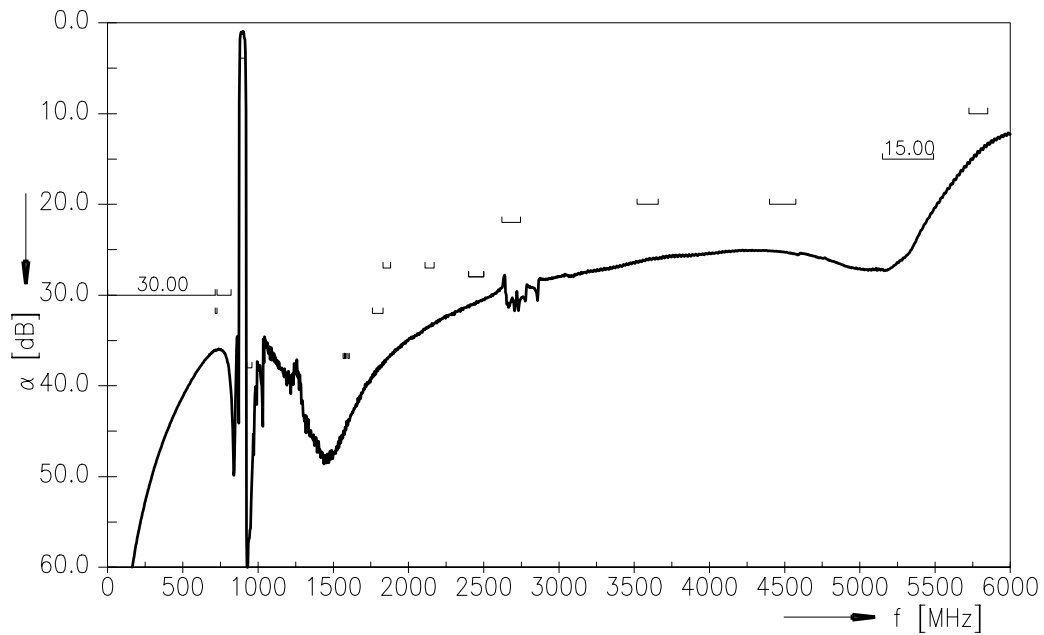


Frequency Response ANT - RX (Power transfer function)

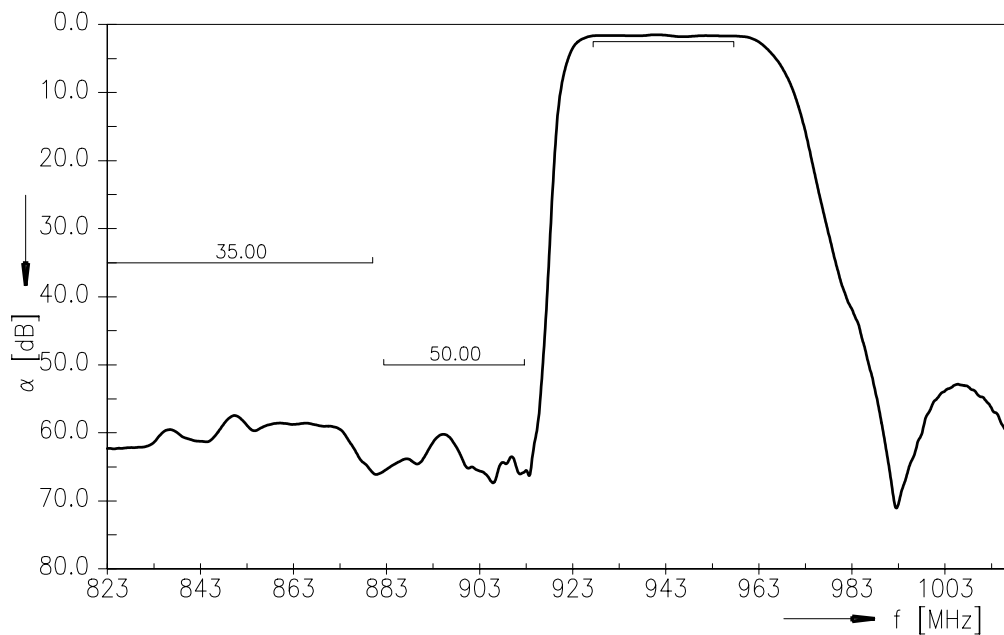




Frequency Response (CW test signal)

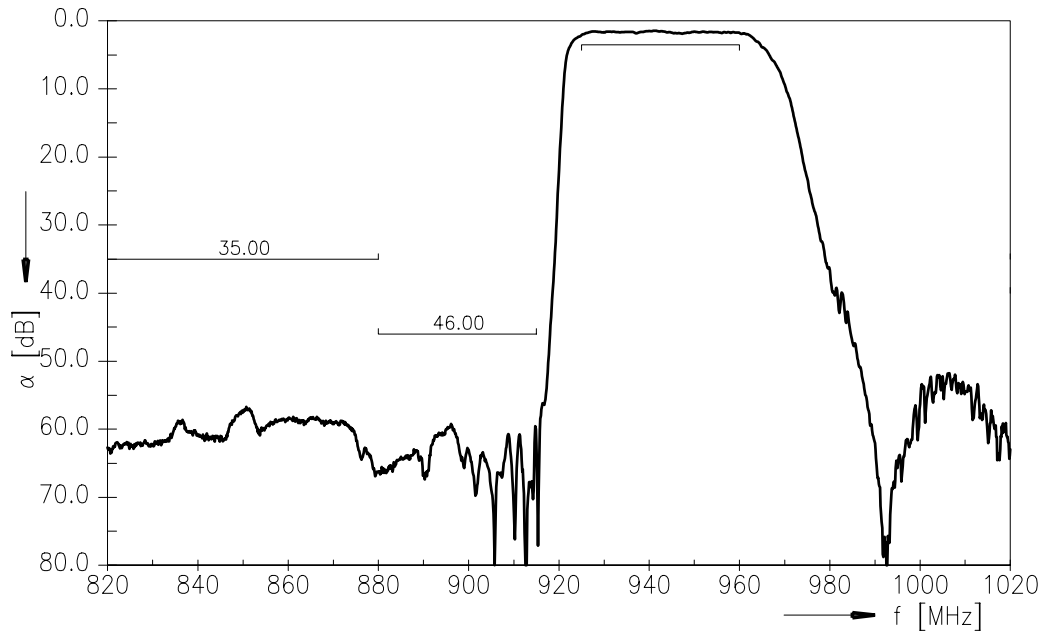


Frequency Response ANT - RX (wideband)

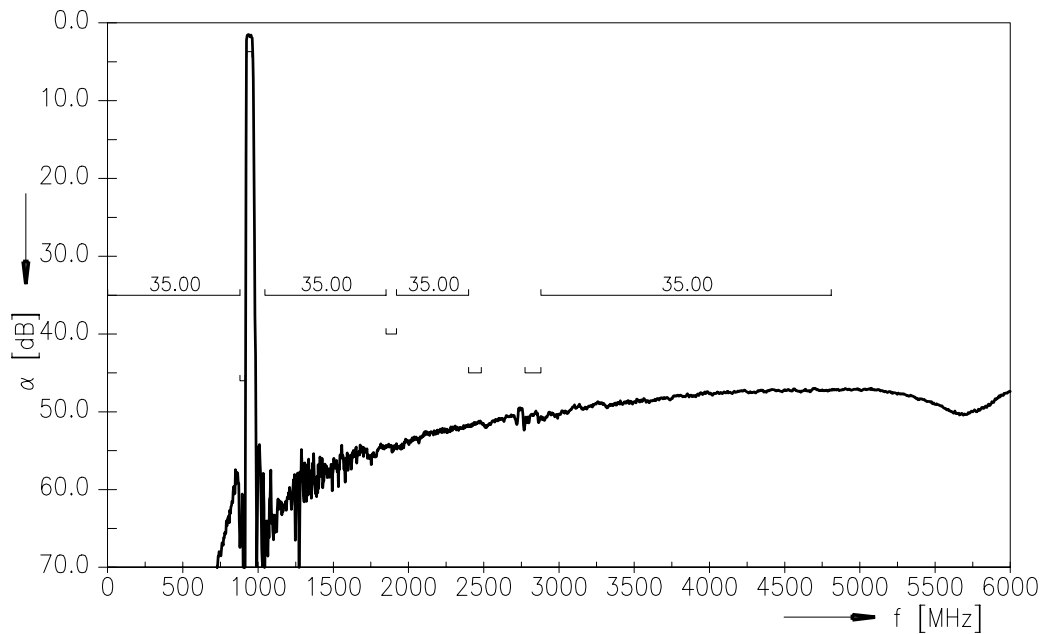




Frequency Response TX - RX (Power transfer function, differential mode)

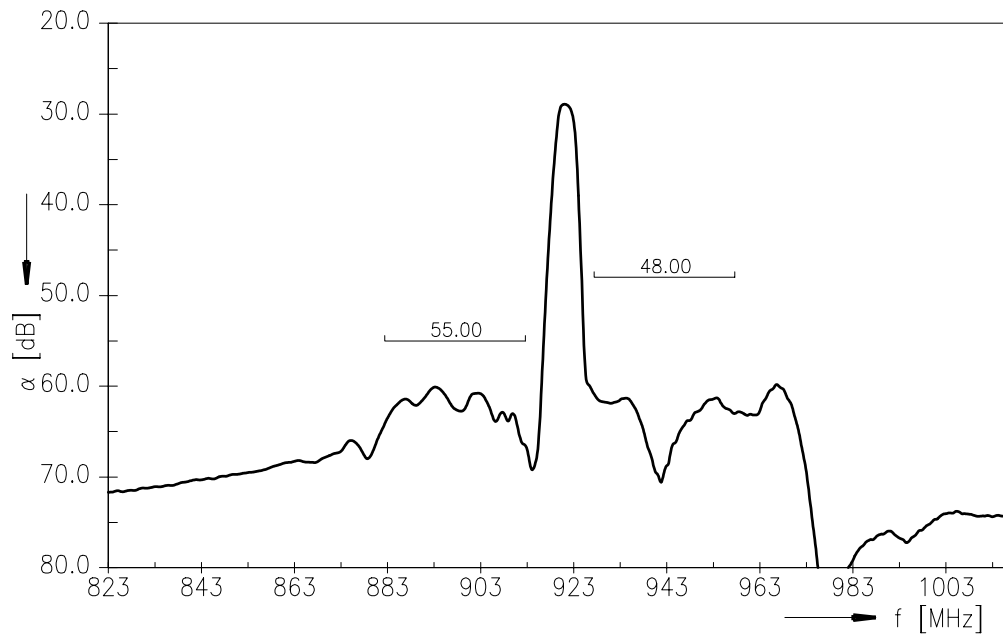


Frequency Response TX-RX (differential, CW signal, spec temperature range $T=0^{\circ}\text{C}$ to $+90^{\circ}\text{C}$)

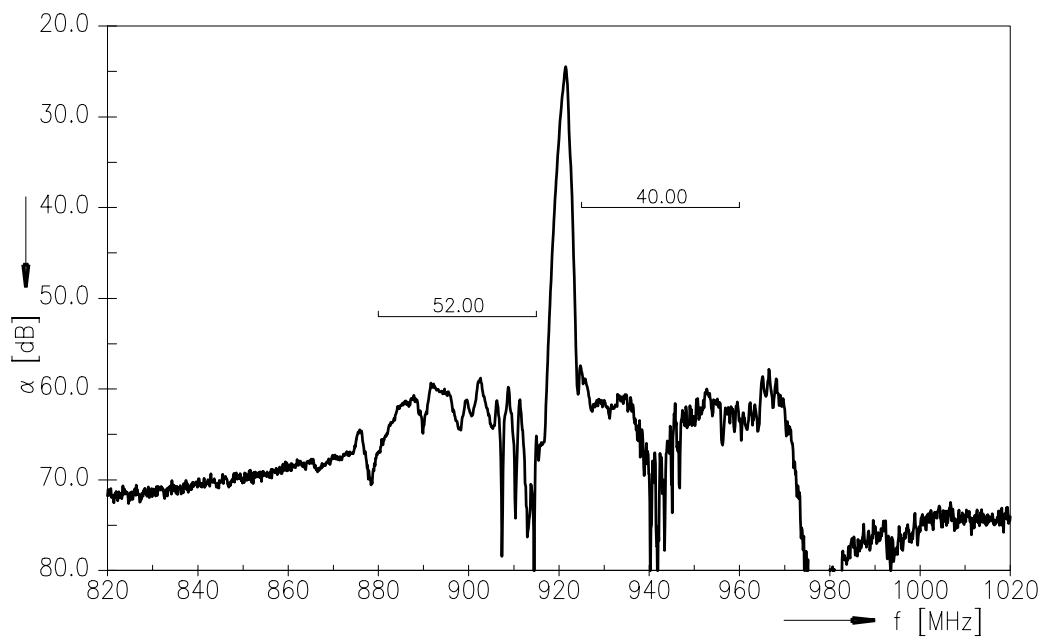









Frequency Response TX - RX (common mode, CW signal)

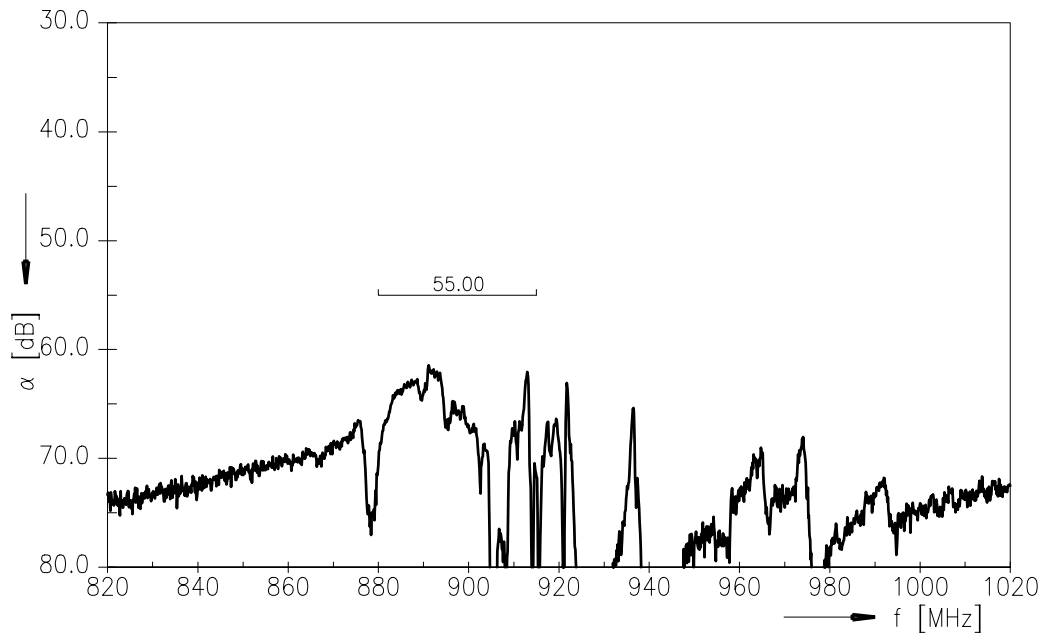

Data Sheet



Return Loss: S_{11} Tx port S_{22} Antenna port S_{33} Rx port

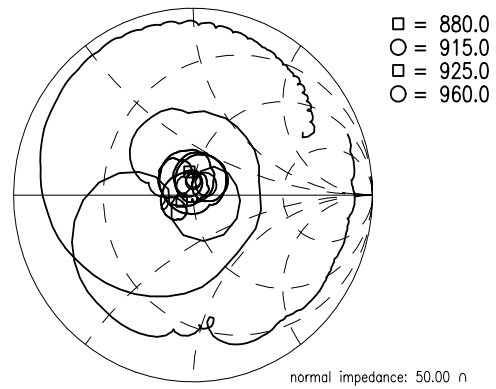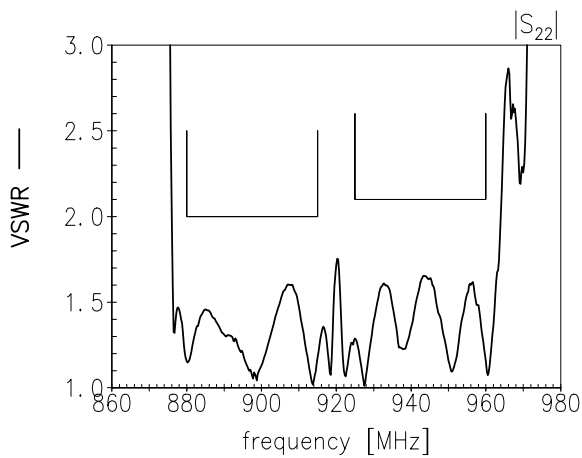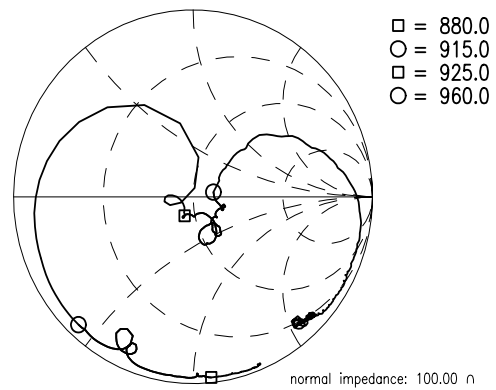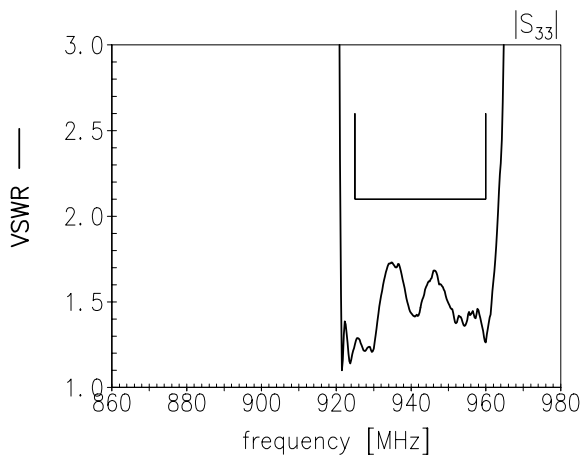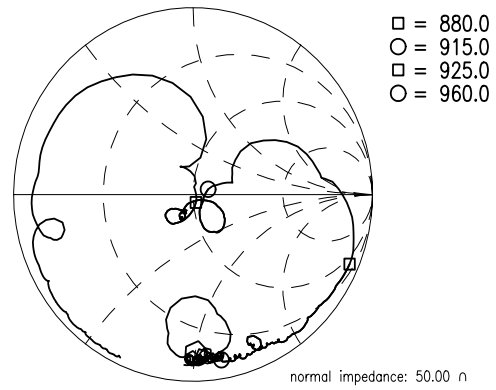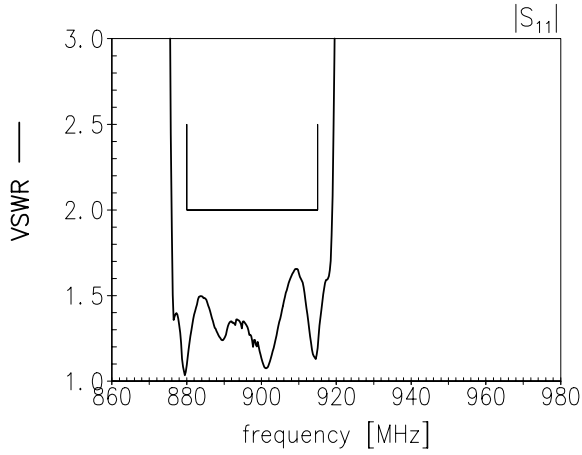

Please read *cautions and warnings* and *important notes* at the end of this document.


References

Type	B8521
Ordering code	B39941B8521P810
Marking and package	C61157-A8-A79
Packaging	F61047-V8247-Z000
Date codes	L_1126
S-parameters	B8521_NB_UN.s4p, B8521_WB_UN.s4p see file header for port/pin assignment table
Soldering profile	S_6001
RoHS compatible	defined as compatible with the following documents: "DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment. 2005/618/EC from April 18th, 2005, amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment."
Moldability	Before using in overmolding environment, please contact your EPCOS sales office.
Matching coils	See Inductor pdf-catalog http://www.tdk.co.jp/tefe02/coil.htm#aname1 and Data Library for circuit simulation http://www.tdk.co.jp/etvcl/index.htm

For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com.

Published by EPCOS AG
Systems, Acoustics, Waves Business Group
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2014. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CeraPlas, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, TFAP, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.