



RoHS Compliant

Illuminated Pushbutton - 10mm

## Specifications

Electrical Ratings	2A @ 48VDC
Sealing Degree	IP65
Electrical Life	50,000 cycles average
Mechanical Life	100,000 cycles average
Contact Resistance	≤ 50mΩ initial

Actuation Force	350 ± 100gF
Dielectric Strength	1500Vrms min contact to contact 1500Vrms min contact to LED
Insulation Resistance	> 100MΩ min @ 500VDC
Operating Temperature	-25°C to 55°C
Storage Temperature	-25°C to 55°C

## Materials



Actuator	Stainless Steel or Aluminum
LED Lens	Polycarbonate (PC)
Threaded Body	Stainless Steel or Aluminum
Terminal Support	Polybutylene Terephthalate (PBT)
Contacts	Silver Alloy
Terminals	Brass, Silver Plated
Hardware	One Hex Nut & One "O" Ring Supplied

## Ordering Information


1. Series	GH	N	2	B	B	G
GH						
2. Bezel Style	Blank = Standard Bezel					
3. Switch Function	N = Momentary L = Latching					
4. Actuator Style:	D = Raised actuator, non-illuminated E = Raised actuator, ring illuminated					
5. Switch Finish	B = Black Anodized Aluminum G = Green Anodized Aluminum R = Red Anodized Aluminum S = Brushed Stainless Steel U = Blue Anodized Aluminum Y = Yellow Anodized Aluminum					
6. Terminal Options	B = Solder Lugs					
7. LED Color	X = No LED		RO = Red / Orange dual LED		YG = Yellow / Green dual LED	
	R = Red		RY = Red / Yellow dual LED		YB = Yellow / Blue dual LED	
	Y = Yellow		RG = Red / Green dual LED		GB = Green / Blue dual LED	
	G = Green		RB = Red / Blue dual LED			
	B = Blue		OY = Orange / Yellow dual LED			
	W = White		OG = Orange / Green dual LED			
	O = Orange		OB = Orange / Blue dual LED			
8. LED Voltage	Blank = No LED N = No internal resistor in series with the LED					

Illuminated Pushbutton - 10mm


**Dimensions**

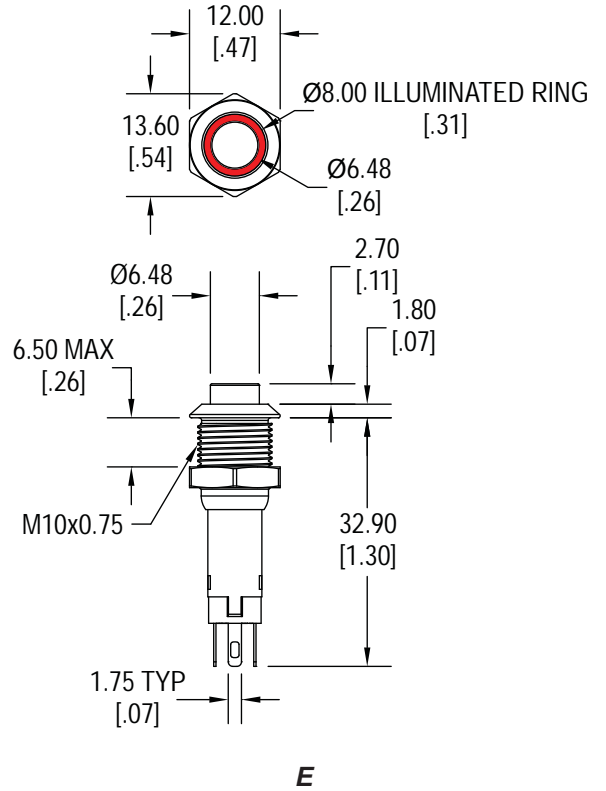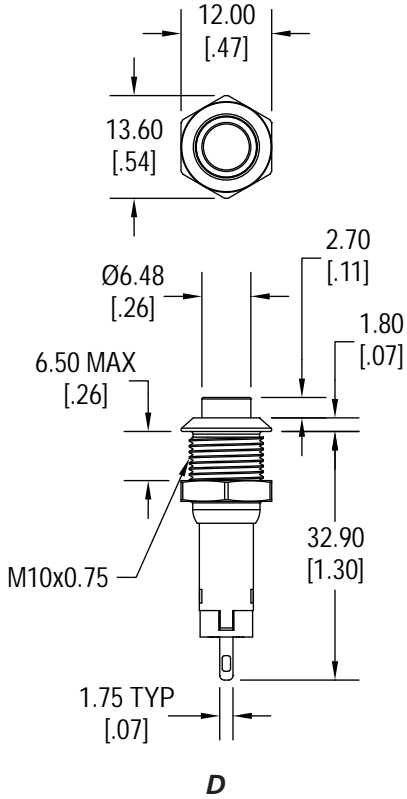

**Bottom View**

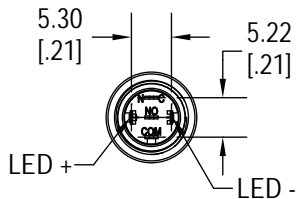


**Panel Cut-Out**



## Schematics



No LED

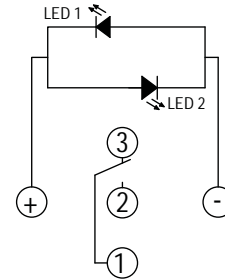

Dual Color LED

## LED Characteristics

LED Ratings		Color						Units
		R	Y	G	B	O	W	
Reverse Voltage	$V_R$	5	5	5	5	5	5	V
Forward Current (avg)	$I_F$	25	25	30	30	25	30	mA
Forward Current (peak)	$I_{FS}$	120	120	160	160	120	160	mA
Reverse Current $V_R = 5V$	$I_R$	10	10	10	10	10	10	$\mu A$
Power Dissipation	$P_T$	80	80	120	120	80	120	mW
Operating & Storage Temperature	$T_A$	-40 ~ +85						C°
Forward Voltage (typ) $I_F = 20mA$	$V_F$	2.1	2.1	3.3	3.3	2.0	3.0	V
Forward Voltage (max) $I_F = 20mA$	$V_F$	2.4	2.5	3.6	3.6	2.3	3.6	V
Wavelength at Peak Emmission $I_F = 20mA$	$\lambda_P$	635	592	516	463	606	n/a	nm
Spectral Line Half-Width $I_F = 20mA$	$\Delta\lambda$	14	12	28	20	12	n/a	nm
Luminous Intensity, $I_F = 20mA$	LI	120	120	170	100	120	700	mcd
Viewing Angle	$\Theta$	145	145	145	145	145	145	deg