
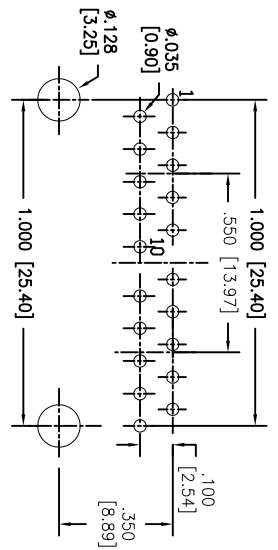
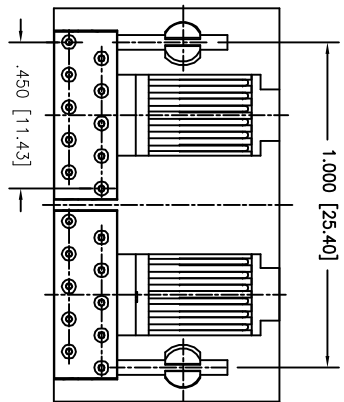
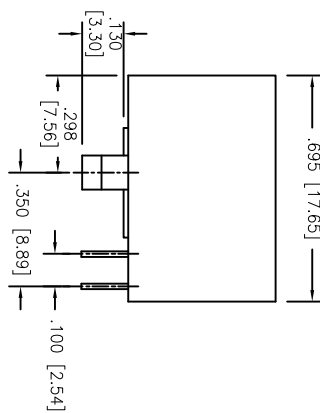


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/30/10	

APPROVED: _____
 DATE: _____ TITLE: _____

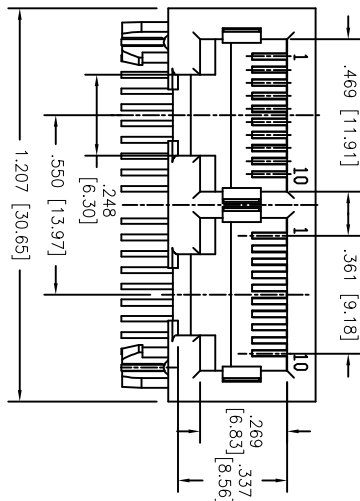

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Contact Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on tails
 (See chart for thickness).

X	PLATING
0	15 μ m Gold
1	30 μ m Gold
2	50 μ m Gold

Electrical:

Operating voltage: 125 VAC max
 Current rating: 1.5 Amps max
 Contact Resistance: 35 mohms max. initial
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minut

Temperature Rating:

Operating temperature: 0°C to +70°C
 Environmental: Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Ratway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MODULAR JACK GANGED, 2 PORT, 10P10C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
.X	± .10
.XX	± .020
.XXX	± .015
∅.X	± .10
∅.XXX	± .015
∅.XXX	± .010
TOLERANCES: EXCEPT AS NOTED	
INCHES	
HOLES	
APPROVALS	
DRAWN	AY
CHECKED	JL
DATE	DATE
12/30/10	

TITLE	SIZE	PART NO.	REV.
MODULAR JACK GANGED, 2 PORT, 10P10C	X	MTJG-2-10105-AX1	-
REF: S00005C	SCALE: NTS	SHEET 1 OF 1	