
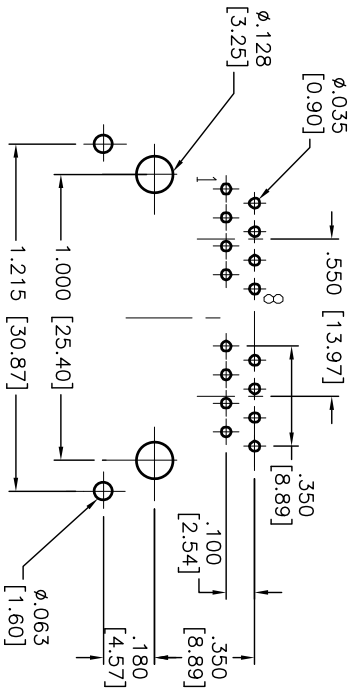
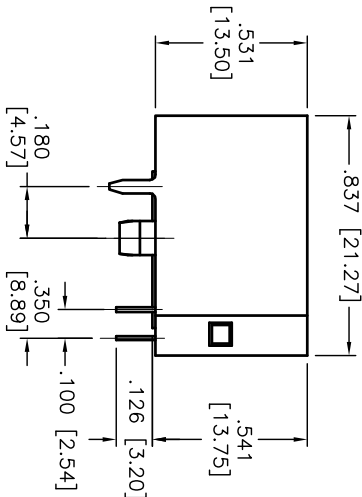



Rev	AWO #	Description	Date	Appr
-		RELEASED	12/8/11	

APPROVED: _____

DATE: _____ TITLE: _____

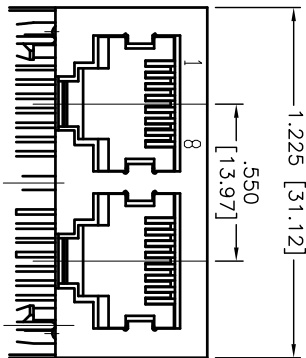

RECOMMENDED PCB LAYOUT

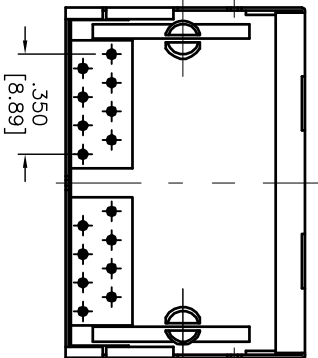

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shield: Brass, Nickel plated

Contact Plating:

Gold Flash over Nickel underplate on contact area,

Tin over Copper underplate on tails

(See chart for thickness).

Electrical:

Operating voltage: 125 VAC max

Current rating: 1.5 Amps max

Contact Resistance: 20 mohms max. initial

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minut

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MODULAR TELEPHONE JACK, GANGED

8P8C, SHIELDED, 2 PORTS

APPROVALS	DATE	SIZE	PART NO.	REV.
DRAWN	AY	12/8/11	MTJG-2-88GX1-FSG	-
CHECKED	WC	12/8/11		
APPROVED				

APPROVED

REF: S00005C

SCALE: NTS

SHEET 1 OF 1